

HUNGARY

Phone: (361) 293 4459
AFS: LHBPYNYN
Email: psdo@hungarocontrol.hu
Post: Hungarian Air Navigation Services
Aeronautical Information Service
PO Box 80
Budapest
H-1675
Hungary

AIP AMDT: AIRAC AMDT 001/2015

Effective Date: **05 Feb 2015**
Publication Date: 25 DEC 2014

1. Amendment content:**1.1 GEN 1.5 - Aircraft instrument, equipment and flight documents**

- Extension of the 8.33 kHz channel spacing for VHF voice communication below FL 195

1.2 GEN 3.3 - Air Traffic Services

- Minimum flight altitude changes

1.3 GEN 4.1 - Aerodrome/Heliport charges

- Contact details of LHDC (Debrecen) International Airport
- Charges of LHUD (Szeged) Airport

1.4 ENR 1.3 - Instrument flight rules

- Free route airspace general procedures

1.5 ENR 3.3 - Area navigation (RNAV) routes

- All ATS routes in Budapest FIR have been withdrawn

1.6 ENR 4.4-1 - Name-Code designators for FRA significant points

- Replacing ICAO Chapter 4.4

1.7 ENR 6 - En-route Charts

- Introduction of free route airspace in Budapest FIR

1.8 AD 2 LHBP

- General aviation flight handling

1.9 AD 2 LHPR

- Charts: ILS/LOC-30, VOR-30, RNAV-12, RNAV-30

1.10 AD 2 LHSM

- Charts: SID-16, SID-34, ILS/LOC-16, NDB-16, NDB-34

1.11 AD 2 LHUD

- Changes in operational hours

2. Hand corrections to the following pages:

Nil

3. Record entry of amendment in GEN 0.2.**4. This AIP amendment incorporates information contained in the following publications:****NOTAM:**

A1935/14, A2224/14, A2146/14, B0033/14, B0035/14

SUP:

Nil

AIC:

A 003/2014, A 004/2014

5. Insert / remove the pages as shown in list on the next page:

GEN 0.2 LIST OF AMENDMENTS

AIRAC AIP AMENDMENT			
<i>NR/Year</i>	<i>Publication date</i>	<i>Date inserted</i>	<i>Inserted by</i>
003/2008	22-May-2008	03-Jul-2008	
004/2008	14-Aug-2008	25-Sep-2008	
001/2009	29-Jan-2009	12-Mar-2009	
002/2009	26-Mar-2009	07-May-2009	
003/2009	10-Sep-2009	22-Oct-2009	
001/2010	03-Dec-2009	14-Jan-2010	
002/2010	25-Feb-2010	08-Apr-2010	
003/2010	17-Jun-2010	29-Jul-2010	
004/2010	15-Jul-2010	26-Aug-2010	
005/2010	07-Oct-2010	18-Nov-2010	
001/2011	30-Dec-2010	10-Feb-2011	
002/2011	24-Mar-2011	05-May-2011	
003/2011	14-Jul-2011	25-Aug-2011	
004/2011	06-Oct-2011	15-Dec-2011	
001/2012	23-Feb-2012	05-Apr-2012	
002/2012	19-Apr-2012	31-May-2012	
003/2012	09-Aug-2012	20-Sep-2012	
004/2012	01-Nov-2012	13-Dec-2012	
001/2013	21-Feb-2013	04-Apr-2013	
002/2013	18-Apr-2013	30-May-2013	
003/2013	13-Jun-2013	25-Jul-2013	
004/2013	03-Oct-2013	14-Nov-2013	
001/2014	26-Dec-2014	06-Feb-2014	
002/2014	06-Feb-2014	03-Apr-2014	
003/2014	15-May-2014	26-Jun-2014	
004/2014	07-Aug-2014	18-Sep-2014	
001/2015	25-Dec-2014	05-Feb-2015	

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 1.12 - 2	20 SEP 2012	ENR 5.6 - 3	18 NOV 2010	AD 2-LHBP - 13	03 APR 2014
ENR 1.12 - 3	05 FEB 2015	ENR 5.6 - 4	18 NOV 2010	AD 2-LHBP - 14	03 APR 2014
ENR 1.12 - 4	05 FEB 2015	ENR 6 - 1	05 FEB 2015	AD 2-LHBP - 15	26 JUN 2014
ENR 1.12 - 5	03 JUL 2008	ENR 6 - 2	05 FEB 2015	AD 2-LHBP - 16	26 JUN 2014
ENR 1.12 - 6	03 JUL 2008	ENR 6-LHCC-ERC - 1	05 FEB 2015	AD 2-LHBP - 17	26 JUN 2014
ENR 1.13 - 1	03 JUL 2008	ENR 6-LHCC-ERC - 2	05 FEB 2015	AD 2-LHBP - 18	26 JUN 2014
ENR 1.13 - 2	03 JUL 2008	ENR 6-LHCC-ERC-MISC1 - 1	05 FEB 2015	AD 2-LHBP - 19	04 APR 2013
ENR 1.14 - 1	25 AUG 2011	ENR 6-LHCC-ERC-MISC1 - 2	05 FEB 2015	AD 2-LHBP - 20	04 APR 2013
ENR 1.14 - 2	25 AUG 2011	ENR 6-LHCC-ERC-MISC2 - 1	05 FEB 2015	AD 2-LHBP - 21	04 APR 2013
ENR 1.14 - 3	03 JUL 2008	ENR 6-LHCC-ERC-MISC2 - 2	05 FEB 2015	AD 2-LHBP - 22	04 APR 2013
ENR 1.14 - 4	03 JUL 2008	ENR 6-LHCC-ERC-MISC3 - 1	05 FEB 2015	AD 2-LHBP - 23	26 JUN 2014
ENR 1.14 - 5	03 JUL 2008	ENR 6-LHCC-ERC-MISC3 - 2	05 FEB 2015	AD 2-LHBP - 24	26 JUN 2014
ENR 1.14 - 6	03 JUL 2008	ENR 6-LHCC-PRD - 1	18 NOV 2010	AD 2-LHBP - 25	26 JUN 2014
ENR 1.14 - 7	03 JUL 2008	ENR 6-LHCC-PRD - 2	18 NOV 2010	AD 2-LHBP - 26	26 JUN 2014
ENR 1.14 - 8	03 JUL 2008	ENR 6-LHCC-TRA - 1	03 JUL 2008	AD 2-LHBP - 27	26 JUN 2014
ENR 2.1 - 1	05 FEB 2015	ENR 6-LHCC-TRA - 2	03 JUL 2008	AD 2-LHBP - 28	26 JUN 2014
ENR 2.1 - 2	05 FEB 2015			AD 2-LHBP - 29	05 FEB 2015
ENR 2.1 - 3	14 NOV 2013			AD 2-LHBP - 30	05 FEB 2015
ENR 2.1 - 4	14 NOV 2013			AD 2-LHBP - 31	26 JUN 2014
ENR 2.1 - 5	18 NOV 2010			AD 2-LHBP - 32	26 JUN 2014
ENR 2.1 - 6	18 NOV 2010			AD 2-LHBP-ADC - 1	18 SEP 2014
ENR 2.2 - 1	18 SEP 2014	AD 0.1 - 1	03 JUL 2008	AD 2-LHBP-ADC - 2	18 SEP 2014
ENR 2.2 - 2	18 SEP 2014	AD 0.1 - 2	03 JUL 2008	AD 2-LHBP-MISC-ARR - 1	25 JUL 2013
ENR 3.1 - 1	03 JUL 2008	AD 0.2 - 1	03 JUL 2008	AD 2-LHBP-MISC-ARR - 2	25 JUL 2013
ENR 3.1 - 2	03 JUL 2008	AD 0.2 - 2	03 JUL 2008	AD 2-LHBP-MISC-DEP - 1	25 JUL 2013
ENR 3.2 - 1	03 JUL 2008	AD 0.3 - 1	03 JUL 2008	AD 2-LHBP-MISC-DEP - 2	25 JUL 2013
ENR 3.2 - 2	03 JUL 2008	AD 0.3 - 2	03 JUL 2008	AD 2-LHBP-PDC/1 - 1	14 NOV 2013
ENR 3.3 - 1	05 FEB 2015	AD 0.4 - 1	03 JUL 2008	AD 2-LHBP-PDC/1 - 2	14 NOV 2013
ENR 3.3 - 2	05 FEB 2015	AD 0.4 - 2	03 JUL 2008	AD 2-LHBP-PDC/2 - 1	30 MAY 2013
ENR 3.4 - 1	03 JUL 2008	AD 0.5 - 1	03 JUL 2008	AD 2-LHBP-PDC/2 - 2	30 MAY 2013
ENR 3.4 - 2	03 JUL 2008	AD 0.5 - 2	03 JUL 2008	AD 2-LHBP-PDC/3 - 1	30 MAY 2013
ENR 3.5 - 1	03 JUL 2008	AD 0.6 - 1	26 JUN 2014	AD 2-LHBP-PDC/3 - 2	30 MAY 2013
ENR 3.5 - 2	03 JUL 2008	AD 0.6 - 2	26 JUN 2014	AD 2-LHBP-AOCA-13R31L - 1	25 AUG 2011
ENR 3.6 - 1	25 AUG 2011	AD 0.6 - 3	26 JUN 2014	AD 2-LHBP-AOCA-13R31L - 2	25 AUG 2011
ENR 3.6 - 2	25 AUG 2011	AD 0.6 - 4	26 JUN 2014	AD 2-LHBP-AOCA-13L31R - 1	25 AUG 2011
ENR 4.1 - 1	18 NOV 2010	AD 0.6 - 5	26 JUN 2014	AD 2-LHBP-AOCA-13L31R - 2	25 AUG 2011
ENR 4.1 - 2	18 NOV 2010	AD 0.6 - 6	26 JUN 2014	AD 2-LHBP-PATC-13R31L - 1	25 AUG 2011
ENR 4.2 - 1	03 JUL 2008	AD 1.1 - 1	06 FEB 2014	AD 2-LHBP-PATC-13R31L - 2	25 AUG 2011
ENR 4.2 - 2	03 JUL 2008	AD 1.1 - 2	06 FEB 2014	AD 2-LHBP-PATC-13L31R - 1	25 AUG 2011
ENR 4.3 - 1	14 JAN 2010	AD 1.2 - 1	18 SEP 2014	AD 2-LHBP-PATC-13L31R - 2	25 AUG 2011
ENR 4.3 - 2	14 JAN 2010	AD 1.2 - 2	18 SEP 2014	AD 2-LHBP-SID-13 - 1	26 JUN 2014
ENR 4.4 - 1	26 JUN 2014	AD 1.2 - 3	18 SEP 2014	AD 2-LHBP-SID-13 - 2	26 JUN 2014
ENR 4.4 - 2	26 JUN 2014	AD 1.2 - 4	18 SEP 2014	AD 2-LHBP-SID31 - 1	26 JUN 2014
ENR 4.4 - 1 - 1	05 FEB 2015	AD 1.2 - 5	18 SEP 2014	AD 2-LHBP-SID31 - 2	26 JUN 2014
ENR 4.4 - 1 - 2	05 FEB 2015	AD 1.2 - 6	18 SEP 2014	AD 2-LHBP-ARR-13L - 1	26 JUN 2014
ENR 4.4 - 1 - 3	05 FEB 2015	AD 1.3 - 1	25 JUL 2013	AD 2-LHBP-ARR-13L - 2	26 JUN 2014
ENR 4.4 - 1 - 4	05 FEB 2015	AD 1.3 - 2	25 JUL 2013	AD 2-LHBP-ARR-13R - 1	26 JUN 2014
ENR 4.4 - 1 - 5	05 FEB 2015	AD 1.3 - 3	18 SEP 2014	AD 2-LHBP-ARR-13R - 2	26 JUN 2014
ENR 4.4 - 1 - 6	05 FEB 2015	AD 1.3 - 4	18 SEP 2014	AD 2-LHBP-ARR-31L - 1	26 JUN 2014
ENR 4.5 - 1	14 JAN 2010	AD 1.4 - 1	05 APR 2012	AD 2-LHBP-ARR-31L - 2	26 JUN 2014
ENR 4.5 - 2	14 JAN 2010	AD 1.4 - 2	05 APR 2012	AD 2-LHBP-ARR-31R - 1	26 JUN 2014
ENR 5.1 - 1	29 JUL 2010	AD 2-LHBC - 1	14 NOV 2013	AD 2-LHBP-ARR-31R - 2	26 JUN 2014
ENR 5.1 - 2	29 JUL 2010	AD 2-LHBC - 2	14 NOV 2013	AD 2-LHBP-ILS/LOC-13L - 1	26 JUN 2014
ENR 5.1 - 3	03 JUL 2008	AD 2-LHBC - 3	29 JUL 2010	AD 2-LHBP-ILS/LOC-13L - 2	26 JUN 2014
ENR 5.1 - 4	03 JUL 2008	AD 2-LHBC - 4	29 JUL 2010	AD 2-LHBP-VOR-13L - 1	26 JUN 2014
ENR 5.2 - 1	05 APR 2012	AD 2-LHBC - 5	29 JUL 2010	AD 2-LHBP-VOR-13L - 2	26 JUN 2014
ENR 5.2 - 2	05 APR 2012	AD 2-LHBC - 6	29 JUL 2010	AD 2-LHBP-NDB-13L - 1	26 JUN 2014
ENR 5.2 - 3	18 SEP 2014	AD 2-LHBC - 7	14 NOV 2013	AD 2-LHBP-NDB-13L - 2	26 JUN 2014
ENR 5.2 - 4	18 SEP 2014	AD 2-LHBC - 8	14 NOV 2013	AD 2-LHBP-ILS/LOC-13R - 1	26 JUN 2014
ENR 5.3 - 1	03 JUL 2008	AD 2-LHBC-ADC - 1	14 NOV 2013	AD 2-LHBP-ILS/LOC-13R - 2	26 JUN 2014
ENR 5.3 - 2	03 JUL 2008	AD 2-LHBC-ADC - 2	14 NOV 2013	AD 2-LHBP-ILS/LOC-31L - 1	26 JUN 2014
ENR 5.4 - 1	20 SEP 2012	AD 2-LHBC-NDB-17L - 1	14 NOV 2013	AD 2-LHBP-ILS/LOC-31L - 2	26 JUN 2014
ENR 5.4 - 2	20 SEP 2012	AD 2-LHBC-NDB-17L - 2	14 NOV 2013	AD 2-LHBP-VOR-31L - 1	26 JUN 2014
ENR 5.4 - 3	13 DEC 2012	AD 2-LHBC-NDB-35R - 1	14 NOV 2013	AD 2-LHBP-VOR-31L - 2	26 JUN 2014
ENR 5.4 - 4	13 DEC 2012	AD 2-LHBC-NDB-35R - 2	14 NOV 2013	AD 2-LHBP-NDB-31L - 1	26 JUN 2014
ENR 5.4 - 5	20 SEP 2012	AD 2-LHBC-RNAV-17L - 1	14 NOV 2013	AD 2-LHBP-NDB-31L - 2	26 JUN 2014
ENR 5.4 - 6	20 SEP 2012	AD 2-LHBC-RNAV-17L - 2	14 NOV 2013	AD 2-LHBP-ILS/LOC-31R - 1	26 JUN 2014
ENR 5.4 - 7	20 SEP 2012	AD 2-LHBC-RNAV-35R - 1	14 NOV 2013	AD 2-LHBP-ILS/LOC-31R - 2	26 JUN 2014
ENR 5.4 - 8	20 SEP 2012	AD 2-LHBC-RNAV-35R - 2	14 NOV 2013	AD 2-LHBP-VOR-31R - 1	26 JUN 2014
ENR 5.4 - 9	20 SEP 2012	AD 2-LHBC-VAC - 1	14 NOV 2013	AD 2-LHBP-VOR-31R - 2	26 JUN 2014
ENR 5.4 - 10	20 SEP 2012	AD 2-LHBC-VAC - 2	14 NOV 2013	AD 2-LHBP-NDB-31R - 1	26 JUN 2014
ENR 5.4 - 11	20 SEP 2012	AD 2-LHBP - 1	05 FEB 2015	AD 2-LHBP-NDB-31R - 2	26 JUN 2014
ENR 5.4 - 12	20 SEP 2012	AD 2-LHBP - 2	05 FEB 2015	AD 2-LHBP-VAC - 1	14 NOV 2013
ENR 5.4 - 13	20 SEP 2012	AD 2-LHBP - 3	18 SEP 2014	AD 2-LHBP-VAC - 2	14 NOV 2013
ENR 5.4 - 14	20 SEP 2012	AD 2-LHBP - 4	18 SEP 2014	AD 2-LHDC - 1	06 FEB 2014
ENR 5.4 - 15	20 SEP 2012	AD 2-LHBP - 5	04 APR 2013	AD 2-LHDC - 2	06 FEB 2014
ENR 5.4 - 16	20 SEP 2012	AD 2-LHBP - 6	04 APR 2013	AD 2-LHDC - 3	03 JUL 2008
ENR 5.5 - 1	18 SEP 2014	AD 2-LHBP - 7	04 APR 2013	AD 2-LHDC - 4	03 JUL 2008
ENR 5.5 - 2	18 SEP 2014	AD 2-LHBP - 8	04 APR 2013	AD 2-LHDC - 5	08 APR 2010
ENR 5.5 - 3	18 SEP 2014	AD 2-LHBP - 9	04 APR 2013	AD 2-LHDC - 6	08 APR 2010
ENR 5.5 - 4	18 SEP 2014	AD 2-LHBP - 10	04 APR 2013	AD 2-LHDC - 7	18 NOV 2010
ENR 5.6 - 1	15 DEC 2011	AD 2-LHBP - 11	03 APR 2014	AD 2-LHDC - 8	18 NOV 2010
ENR 5.6 - 2	15 DEC 2011	AD 2-LHBP - 12	03 APR 2014	AD 2-LHDC - 9	20 SEP 2012

PART 3 - AERODROMES (AD)

AIP HUNGARY

AD 2-LHDC - 10	20 SEP 2012	AD 2-LHPR-VOR-30 - 1	05 FEB 2015
AD 2-LHDC - 11	25 JUL 2013	AD 2-LHPR-VOR-30 - 2	05 FEB 2015
AD 2-LHDC - 12	25 JUL 2013	AD 2-LHPR-RNAV-12 - 1	05 FEB 2015
AD 2-LHDC-ADC - 1	14 NOV 2013	AD 2-LHPR-RNAV-12 - 2	05 FEB 2015
AD 2-LHDC-ADC - 2	14 NOV 2013	AD 2-LHPR-RNAV-30 - 1	05 FEB 2015
AD 2-LHDC-AOCA - 1	26 AUG 2010	AD 2-LHPR-RNAV-30 - 2	05 FEB 2015
AD 2-LHDC-AOCA - 2	26 AUG 2010	AD 2-LHPR-VAC - 1	26 JUN 2014
AD 2-LHDC-SID-05R - 1	26 AUG 2010	AD 2-LHPR-VAC - 2	26 JUN 2014
AD 2-LHDC-SID-05R - 2	26 AUG 2010	AD 2-LHSM - 1	30 MAY 2013
AD 2-LHDC-SID-23L - 1	26 AUG 2010	AD 2-LHSM - 2	30 MAY 2013
AD 2-LHDC-SID-23L - 2	26 AUG 2010	AD 2-LHSM - 3	25 JUL 2013
AD 2-LHDC-STAR - 1	26 AUG 2010	AD 2-LHSM - 4	25 JUL 2013
AD 2-LHDC-STAR - 2	26 AUG 2010	AD 2-LHSM - 5	30 MAY 2013
AD 2-LHDC-ILS-05R - 1	26 AUG 2010	AD 2-LHSM - 6	30 MAY 2013
AD 2-LHDC-ILS-05R - 2	26 AUG 2010	AD 2-LHSM - 7	20 SEP 2012
AD 2-LHDC-NDB-23L - 1	26 AUG 2010	AD 2-LHSM - 8	20 SEP 2012
AD 2-LHDC-NDB-23L - 2	26 AUG 2010	AD 2-LHSM - 9	20 SEP 2012
AD 2-LHDC-RNAV-05R - 1	26 AUG 2010	AD 2-LHSM - 10	20 SEP 2012
AD 2-LHDC-RNAV-05R - 2	26 AUG 2010	AD 2-LHSM - 11	25 JUL 2013
AD 2-LHDC-RNAV-23L - 1	26 AUG 2010	AD 2-LHSM - 12	25 JUL 2013
AD 2-LHDC-RNAV-23L - 2	26 AUG 2010	AD 2-LHSM-ADC - 1	14 NOV 2013
AD 2-LHDC-VAC - 1	26 AUG 2010	AD 2-LHSM-ADC - 2	14 NOV 2013
AD 2-LHDC-VAC - 2	26 AUG 2010	AD 2-LHSM-AOCA-1634 - 1	20 SEP 2012
AD 2-LHFM - 1	26 AUG 2010	AD 2-LHSM-AOCA-1634 - 2	20 SEP 2012
AD 2-LHFM - 2	26 AUG 2010	AD 2-LHSM-SID-16 - 1	05 FEB 2015
AD 2-LHFM - 3	14 JAN 2010	AD 2-LHSM-SID-16 - 2	05 FEB 2015
AD 2-LHFM - 4	14 JAN 2010	AD 2-LHSM-SID-34 - 1	05 FEB 2015
AD 2-LHFM - 5	14 JAN 2010	AD 2-LHSM-SID-34 - 2	05 FEB 2015
AD 2-LHFM - 6	14 JAN 2010	AD 2-LHSM-ILS/LOC-16 - 1	05 FEB 2015
AD 2-LHFM - 7	14 JAN 2010	AD 2-LHSM-ILS/LOC-16 - 2	05 FEB 2015
AD 2-LHFM - 8	14 JAN 2010	AD 2-LHSM-NDB-16 - 1	05 FEB 2015
AD 2-LHFM-RNAV-16 - 1	26 AUG 2010	AD 2-LHSM-NDB-16 - 2	05 FEB 2015
AD 2-LHFM-RNAV-16 - 2	26 AUG 2010	AD 2-LHSM-NDB-34 - 1	05 FEB 2015
AD 2-LHFM-RNAV-34 - 1	26 AUG 2010	AD 2-LHSM-NDB-34 - 2	05 FEB 2015
AD 2-LHFM-RNAV-34 - 2	26 AUG 2010	AD 2-LHSM-RNAV-16 - 1	20 SEP 2012
AD 2-LHFM-VAC - 1	26 AUG 2010	AD 2-LHSM-RNAV-16 - 2	20 SEP 2012
AD 2-LHFM-VAC - 2	26 AUG 2010	AD 2-LHSM-RNAV-34 - 1	20 SEP 2012
AD 2-LHNY - 1	26 JUN 2014	AD 2-LHSM-RNAV-34 - 2	20 SEP 2012
AD 2-LHNY - 2	26 JUN 2014	AD 2-LHSM-VAC - 1	20 SEP 2012
AD 2-LHNY - 3	25 JUL 2013	AD 2-LHSM-VAC - 2	20 SEP 2012
AD 2-LHNY - 4	25 JUL 2013	AD 2-LHUD - 1	05 FEB 2015
AD 2-LHNY - 5	29 JUL 2010	AD 2-LHUD - 2	05 FEB 2015
AD 2-LHNY - 6	29 JUL 2010	AD 2-LHUD - 3	05 FEB 2015
AD 2-LHNY - 7	26 JUN 2014	AD 2-LHUD - 4	05 FEB 2015
AD 2-LHNY - 8	26 JUN 2014	AD 2-LHUD - 5	26 AUG 2010
AD 2-LHNY-ADC - 1	25 JUL 2013	AD 2-LHUD - 6	26 AUG 2010
AD 2-LHNY-ADC - 2	25 JUL 2013	AD 2-LHUD - 7	26 AUG 2010
AD 2-LHPP - 1	26 JUN 2014	AD 2-LHUD - 8	26 AUG 2010
AD 2-LHPP - 2	26 JUN 2014	AD 2-LHUD-VAC - 1	26 JUN 2014
AD 2-LHPP - 3	22 OCT 2009	AD 2-LHUD-VAC - 2	26 JUN 2014
AD 2-LHPP - 4	22 OCT 2009		
AD 2-LHPP - 5	18 NOV 2010		
AD 2-LHPP - 6	18 NOV 2010		
AD 2-LHPP - 7	26 JUN 2014		
AD 2-LHPP - 8	26 JUN 2014		
AD 2-LHPP-ADC - 1	26 JUN 2014		
AD 2-LHPP-ADC - 2	26 JUN 2014		
AD 2-LHPP-AOCA - 1	26 AUG 2010		
AD 2-LHPP-AOCA - 2	26 AUG 2010		
AD 2-LHPP-ILS-34 - 1	26 AUG 2010		
AD 2-LHPP-ILS-34 - 2	26 AUG 2010		
AD 2-LHPP-NDB-16 - 1	18 NOV 2010		
AD 2-LHPP-NDB-16 - 2	18 NOV 2010		
AD 2-LHPP-VAC - 1	26 AUG 2010		
AD 2-LHPP-VAC - 2	26 AUG 2010		
AD 2-LHPR - 1	26 JUN 2014		
AD 2-LHPR - 2	26 JUN 2014		
AD 2-LHPR - 3	26 JUN 2014		
AD 2-LHPR - 4	26 JUN 2014		
AD 2-LHPR - 5	26 JUN 2014		
AD 2-LHPR - 6	26 JUN 2014		
AD 2-LHPR - 7	26 JUN 2014		
AD 2-LHPR - 8	26 JUN 2014		
AD 2-LHPR-ADC - 1	26 JUN 2014		
AD 2-LHPR-ADC - 2	26 JUN 2014		
AD 2-LHPR-SID-12 - 1	06 FEB 2014		
AD 2-LHPR-SID-12 - 2	06 FEB 2014		
AD 2-LHPR-SID-30 - 1	25 JUL 2013		
AD 2-LHPR-SID-30 - 2	25 JUL 2013		
AD 2-LHPR-ILS/LOC-30 - 1	05 FEB 2015		
AD 2-LHPR-ILS/LOC-30 - 2	05 FEB 2015		
AD 2-LHPR-VOR-12 - 1	18 SEP 2014		
AD 2-LHPR-VOR-12 - 2	18 SEP 2014		

THIS PAGE INTENTIONALLY LEFT BLANK

GEN 1.5 AIRCRAFT INSTRUMENT, EQUIPMENT AND FLIGHT DOCUMENTS**1. GENERAL**

Commercial air transport aircraft operating in the airspace of Hungary have to adhere to the provisions of ICAO Annex 6 - Operation of Aircraft - Part 1, Chapter 6 - Aeroplane Instruments, Equipment and Flight Documents and Chapter 7 - Aeroplane Communication and Navigation Equipment.

Aircraft, other than State aircraft, operating according to Instrument Flight Rules (IFR) within Budapest FIR above 9500 FT ALT shall be equipped with, as a minimum, RNAV equipment meeting RNAV 5 in accordance with the requirements set out in ICAO Doc 7030/5 Regional Supplementary Procedures (5th edition, 2008, EUR). RNAV may only be performed by operators approved to do so and only with aircraft which are equipped with approved RNAV equipment.

2. SPECIAL EQUIPMENT TO BE CARRIED

Within Budapest FIR special equipment are not required.

3. EQUIPMENT TO BE CARRIED ON ALL TYPES OF FLIGHT

All aircraft engaged in international flight operations shall carry and operate SSR transponder according to *ENR 1.6 para 2.*

4. RADIO EQUIPMENT REQUIREMENTS

On the basis of the Commission Implementing Regulation (EU) No 1079/2012 for IFR GAT flights within class "C" airspaces of Budapest FIR above 9500 FT ALT, the carriage and operation of 8.33 KHZ channel spacing-capable radio equipment is mandatory.

Non-equipped flights which are flight planned to enter Budapest FIR, except the UHF equipped State flights must flight plan to operate below 9500 FT ALT.

For exemptions from mandatory carriage of 8.33 KHZ equipment See *ENR 1.8.*

5. REQUIREMENTS FOR FM BROADCAST IMMUNITY OF AIRBORNE RECEIVERS

- 5.1.** In Budapest FIR, aircraft with NAV equipment not complying with the applicable interference immunity performance requirements for ILS localiser and VOR receiving systems (ref. ICAO Annex 10, Vol. I., Chapter 3. para. 3.1.4. and 3.3.8.) may not continue to operate after 1st January 2001.

Exceptions: State aircraft with NAV equipment not complying with the above referred ICAO Standards may continue operations within Budapest FIR with the provision, that they are equipped with suitable other RNAV equipment (meeting RNAV 5 /B-RNAV/ in accordance with ICAO DOC 7030/5 European (EUR) Regional Supplementary Procedures Chapter 4.), for enroute part of the IFR flight.

For Budapest Liszt Ferenc International Airport alternative approach procedures (NDB) are published in *AD 2-LHBP.*

- 5.2.** All VHF communication receivers operating within Budapest FIR shall meet the ICAO FM Broadcast Immunity requirements (ref. ICAO Annex 10 Vol. III. Part II. para. 2.3.3).

- 5.3.** Any interference problems possibly experienced during their operations within Budapest FIR users are requested to report to:

National Transport Authority Aviation Authority (NTA AA)

Post:H-1675 Budapest P.O. Box 41.

The report should include the following information:

- a. frequency, on which interference was experienced;
- b. position and level/height of the aircraft;
- c. aircraft call sign and registration (number);
- d. date and time (UTC) of the experienced harmful interference

e. description of the interfering signal (e.g. music, speech, language, other noise, etc.)

6. RVSM OPERATION

Except for designated airspace where RVSM transition tasks are carried out, only RVSM approved aircraft and non-RVSM approved State aircraft shall be permitted to operate within the EUR RVSM airspace.

RVSM approved aircraft are those aircraft for which the Operator has obtained an RVSM approval, either from the State in which the operator is based, or from the State in which the aircraft is registered.

Guidance material on the airworthiness, continued airworthiness and the operational practices and procedures for the EUR RVSM airspace is provided in the Joint Aviation Authorities (JAA) Temporary Guidance Leaflet (TGL) No. 6, Revision 1 and the ICAO EUR Regional Supplementary Procedures (Doc 7030/5).

Except for State aircraft, RVSM approval is required for aircraft to operate in the RVSM airspace within Budapest FIR as described in ENR 2.1.

Note:

The provisions applicable to non-RVSM approved civil operations in EUR RVSM airspace where RVSM transition tasks are carried out are specified in the ICAO Regional Supplementary Procedures (Doc 7030/5 – EUR Chapter 1).

7. ACAS II REQUIREMENTS

All civil fixed-wing turbine-powered aircraft operating within airspace of Hungary shall be equipped with Airborne Collision Avoidance System (ACAS) II type:

- a. having a maximum take-off mass exceeding 15 000 kg or maximum approved passenger seating configuration of more than 30,
- b. having a maximum take-off mass exceeding 5 700 kg or maximum approved passenger seating configuration of more than 19.

The exemption from this requirement applies to aeroplanes which are subject to the provisions of Annex II to the EC Regulation (EC) No. 216/2008.

8. MODE S PROCEDURES – DISPLAY OF DOWNLINKED AIRCRAFT PARAMETERS (DAPs)

The following Mode S DAPs are used in Budapest FIR:

- DSFL- Downlinked Selected Flight Level
- DIAS- Downlinked Indicated Air Speed
- DMACH- Downlinked Mach Number
- DHDG- Downlinked Magnetic Heading.

These aircraft parameters are downlinked from aircraft by the Mode S EHS (Enhanced Surveillance) compliant transponder. Aircraft that are equipped with Mode S ELS (Elementary Surveillance) transponder only, cannot downlink these values.

Having seen the current Indicated Air Speed, Mach Number and Magnetic Heading in the label, the Air Traffic Controller generally will use these displayed values of a Mode S EHS equipped aircraft, without verbally asking.

Note 1: in certain circumstances, it may be necessary to verbally verify any of these DAPs against reading from the flight deck.

Note 2: the DRC (Downlinked Rate of Climb/Descend value is also provided by EHS compliant aircraft, but the Air Traffic Controller will not use it, due to the fluctuation of the DRC value. However the DRC value is also displayed on the screen, to give information about the tendency, and the order of magnitude of the vertical speed.

The carriage of a Mode S transponder capable of downlinking EHS aircraft parameters will not be compulsory in the Budapest FIR. However, where aircraft is so equipped, the installation and wiring of the instruments and transponder shall guarantee the downlinking of correct values in accordance with certification guidance contained in EASA Document AMC 20-13, or other equivalent airworthiness specifications.

AIP HUNGARY

F

F	Fixed
FAC	Facilities
FAF	Final approach fix
FAL	Facilitation of international air transport
FAP	Final approach point
FATO	Final approach and take-off area
FAX	Facsimile transmission
FAWP	+Final approach way point
FBL	Light (used to indicate the intensity of weather phenomena, interference or static reports, e.g. FBL RA=light rain)
FC	Funnel cloud (tornado or water spout)
FCST	Forecast
FCT	Friction coefficient
FDPS	Flight data processing system
FEB	February
FEW	Few
FG	Fog
FIC	Flight information centre
FIR	‡Flight information region
FIS	Flight information service
FISA	Automated flight information service
FL	Flight level
FLD	Field
FLG	Flashing
FLR	Flares
FLT	Flight
FLTCK	Flight check
FLUC	Fluctuating or fluctuation or fluctuated
FLW	Follow(s) or following
FLY	Fly or flying
FM	From
FM	From (followed by time weather change is forecast to begin)
FMS	‡Flight management system
FMU	Flow management unit
FNA	Final approach
FPAP	Flight pass alignment point
FPL	Filed flight plan (message type designator)
FPM	Feet per minute
FPR	Flight plan route
FR	Fuel remaining
FRA	+Free Route Airspace
FREQ	Frequency
FRI	Friday
FRNG	Firing
FRONT	‡Front (relating to weather)
FRQ	Frequent
FSL	Full stop landing
FSS	Flight service station
FST	First
FT	Feet (dimensional unit)
FTP	Fictitious threshold point
FU	Smoke
FUA	+Flexible use of airspace
FZ	Freezing
FZDZ	Freezing drizzle
FZFG	Freezing fog

FZRA	Freezing rain
G	
G	Green
G	Variations from the mean wind speed (gust) (followed by figures in the METAR/SPECI and TAF
GA	Go ahead, resume sending (to be used in AFS as a procedure signal)
G/A	Ground to air
G/A/G	Ground to air and air to ground
GAGAN	†GPS and geostationary earth orbit augmented navigation
GAIN	Airspeed or head wing gain
GARP	GBAS azimuth referential point
GAMET	Area forecast for low-level flights
GAT	+General air traffic
GBAS	†Ground-based augmentation system (to be pronounced “GEE-BAS”)
GCA	‡Ground control approach system or ground control approach
GDCA	+General Directorate of Civil Aviation
GEN	General
GEO	Geographic or true
GES	Ground earth station
GLD	Glider
GLONASS	†(to be pronounced “GLO-NAS”) Global orbiting navigation satellite system
GLS	‡GBAS landing system
GMC	Ground movement chart (followed by name/title)
GND	Ground
GNDCK	Ground check
GNSS	‡Global navigation satellite system
GP	Glide path
GPS	‡Global positioning system
GR	Hail
GRAS	†Ground-based regional augmentation system (to be pronounced “GRASS”)
GRASS	Grass landing area
GRIB	Processed meteorological data in the form of grid point values (in aeronautical meteorological code)
GRVL	Gravel
GS	Ground speed
GS	Small hail and/or snow pellets
GUND	Geoid undulation
H	
H	High pressure area or the centre of high pressure
H24	Continuous day and night service
HAPI	Helicopter approach path indicator
HBN	Hazard beacon
HDF	High frequency direction finding station
HDG	Heading
HEL	Helicopter
HF	‡High frequency (3000 to 30000 kHz)
HGT	Height or height above
HIAL	+High intensity approach lights
HIRL	+High intensity runway lights
HJ	Sunrise to sunset
HLDG	Holding
HN	Sunset to sunrise
HNG	+Hungarian or Hungary
HO	Service available to meet operational requirements
HOL	Holiday

AIP HUNGARY

HOSP	Hospital aircraft
HPA	Hectopascal
HR	Hours
HS	Service available during hours of scheduled operations
HUD	Head-up display
HUF	+Hungarian forints
HUFRA	+Hungarian Free Route Airspace
HURCN	Hurricane
HVDF	High and very high frequency direction finding stations (at the same position)
HVY	Heavy
HVY	Heavy (used to indicate the intensity of weather phenomena (e.g. HVY RA = heavy rain)
HWS	+Horizontal wind shear
HX	No specific working hours
HYR	Higher
HZ	Haze
HZ	Hertz (cycle per second)

I

IAC	Instrument approach chart (followed by name/title)
IAF	Initial approach fix
IAP	Instrument approach procedure
IAR	Intersection of air routes
IAS	Indicated air speed
IBN	Identification beacon
IC	Ice crystals (very small ice crystals in suspension also known as diamond dust)
ICAO	+International Civil Aviation Organization
ICE	Icing
ID	Identifier or identify
IDENT	†Identification
IF	Intermediate approach fix
IFF	Identification friend/foe
IFPS	+Integrated initial flight plan processing system
IFR	‡Instrument flight rules
IGA	International general aviation
ILS	‡Instrument landing system
IM	Inner marker
IMC	‡Instrument meteorological conditions
IMG	Immigration
IMI	*Interrogation sign (question mark) (to be used in AFS as a procedure signal)
IMPR	Improve or improving
IMT	Immediate or immediately
INA	Initial approach
INBD	Inbound
INC	In cloud
INCERFA	†Uncertainty phase
INFO	†Information
INOP	Inoperative
INP	If not possible
INPR	In progress
INS	Inertial navigation system
INS	+Inches
INSTL	Install or installed or installation
INSTR	Instrument
INT	Intersection
INTL	International
INTRG	Interrogator
INTRP	Interrupt or interruption or interrupted
INTSF	Intensify or intensifying

INTST	Intensity
IR	Ice on runway
ISA	International standard atmosphere
ISB	Independent sideband
ISOL	Isolated

J

JAA	+Joint Aviation Authorities
JAN	January
JTST	Jet stream
JUL	July
JUN	June

K

KG	Kilogrammes
KHZ	Kilohertz
KIAS	+Knots indicated airspeed
KM	Kilometres
KMH	Kilometres/hour
KPA	Kilo pascal
KT	Knots
KW	Kilowatts

L

L	Left (preceded by runway designator number too identify a parallel runway)
L	Locator (see LM, LO)
LAM	Logical acknowledgement (message type designator)
LAN	Inland
LAT	Latitude
LDA	Landing distance available
LDAH	Landing distance available, helicopter
LDG	Landing
LDI	Landing direction indicator
LEN	Length
LF	Low frequency (30 to 300 kHz)
LGT	Light or lighting
LGTD	Lighted
LI	+Locator inner
LIH	Light intensity high
LIL	Light intensity low
LIM	Light intensity medium
LLZ	Localizer
LM	Locator, middle
LMT	Local Mean Time
LNG	Long (used to indicate the type of approach desired or required)
LO	Locator outer
LOC	Locally or location or located
LONG	Longitude
LORAN	†LORAN (long range air navigation system)
LOSS	Airspeed or headwind loss
LR	The last message received by me was(to be used in AFS as a procedure signal)
LRG	Long range
LS	The last message sent by me was(to be used in AFS as a procedure signal)
LT	+Local Time
LTD	Limited
LTF	+Land line telephone
LTP	Landing threshold point

AIP HUNGARY

LTT	Land line teletypewriter
LV	Light and variable (relating to wind)
LVE	Leave or leaving
LVL	Level
LYR	Layer or layered
M	
M	Mach number (followed by figures)
M	Metres (preceded by figures)
M	Minimum values of runway visual range (followed by figures in the METAR/SPECI and TAF)
MAA	Maximum authorized altitude
MAG	Magnetic
MAINT	Maintenance
MAP	Aeronautical maps and charts
MAPT	Missed approach point
MAR	March
MAR	At sea
MAS	Manual A1 simplex
MAX	Maximum
MAY	May
MBST	Microburst
MCA	Minimum crossing altitude
MCTR	+Military CTR
MCW	Modulated continuous wave
MDA	Minimum descent altitude
MDF	Medium frequency direction-finding station
MDH	Minimum descent height
MEA	Minimum en-route altitude
MEHT	Minimum eye-height over threshold (for visual approach slope indicator systems)
MET	†Meteorological or meteorology
METAR	†Aviation routine weather report (in aeronautical meteorological code)
METREPORT	Local routine meteorological report (in abbreviated plain language)
MF	Medium frequency (300 to 3000 kHz)
MHDF	Medium and high frequency direction- finding stations (at the same position)
MHVDF	Medium, high and very high frequency direction-finding stations (at the same position)
MHZ	Megahertz
MID	Mid-point (related to RVR)
MIFG	Shallow fog
MIL	Military
MIN	*Minutes
MIS	Missing ... (transmission identification) (to be used in AFS as a procedure signal)
MKR	Marker radio beacon
MLS	‡Microwave landing system
MM	Middle marker
MMO	+Main Meteorological Office
MNM	Minimum
MNPS	Minimum navigation performance specifications
MNT	Monitor or monitoring or monitored
MNTN	Maintain
MOA	Military operating area
MOC	Minimum obstacle clearance (required)
MOD	Moderate (used to indicate the intensity of weather phenomena, interference or static reports e.g. MOD RA = moderate rain)
MON	Above mountains
MON	Monday
MOPS	†Minimum operational performance standards
MOV	Move or moving or movement

MPS	Metres per second
MRA	Minimum reception altitude
MRG	Medium range
MRP	ATS per MET reporting point
MS	Minus
MSA	Minimum sector altitude
MSAS	†Multifunctional transport satellite (MTSAT) satellite-based augmentation system (to be pronounced "EM-SAS")
MSAW	Minimum safe altitude warning
MSG	Message
MSL	Mean sea level
MSR	#Message ... (transmission identification) has been misrouted (to be used in AFS as a procedure signal)
MSSR	Mono pulse secondary surveillance radar
MT	Mountain
MTOW	+Maximum take-off weight
MTU	Metric units
MTW	Mountain waves
MVDF	Medium and very high frequency direction-finding stations (at the same position)
MWO	Meteorological watch office
MX	Mixed type of ice formation (white and clear)

N

N	North or Northern latitude
N	No distinct tendency (in RVR during previous 10 minutes)
NASC	†National AIS system centre
NAT	North Atlantic
NAV	Navigation
NB	Northbound
NBFR	Not before
NC	No change
NCD	No cloud detected (used in automated METAR/SPECI)
NDB	‡Non-directional radio beacon
NDV	No directional variations available (used in automated METAR/SPECI)
NE	North-east
NEB	North-eastbound
NEG	No or negative or permission not granted or that is not correct
NGT	Night
NIL	*†None or I have nothing to send to you
NM	Nautical miles
NML	Normal
NN	No name, unnamed
NNE	North - north-east
NNW	North - north-west
NO	No (negative) (to be used in AFS as a procedure signal)
NOF	International NOTAM office
NON	+Designation of non-modulated
NOSIG	†No significant change (used in trend type landing forecasts)
NONFUA	+Not subject to Flexible use of airspace
NOTAM	†A notice distributed by means of telecommunication containing information concerning the establishment, condition or change in any aeronautical facility, service, procedure or hazard, the timely knowledge of which is essential to personnel concerned with flight operations.
NOV	November
NOZ	‡Normal operating zone
NR	Number
NRH	No reply heard
NS	Nimbostratus

AIP HUNGARY

NSC	Nil significant cloud
NSW	Nil significant weather
NTL	National
NTZ	‡No transgression zone
NW	North-west
NWB	North-westbound
NXT	Next

O

OAC	Oceanic area control centre
OAS	Obstacle assessment surface
OBS	Observe or observed or observation
OBSC	Obscure or obscured or obscuring
OBST	Obstacle
OCA	Obstacle clearance altitude
OCA	Oceanic control area
OCC	Occulting (light)
OCH	Obstacle clearance height
OCNL	Occasional or occasionally
OCS	Obstacle clearance surface
OCT	October
OFZ	Obstacle free zone
OGN	Originate (to be used in AFS as a procedure signal)
OHD	Overhead
OK	*We agree or it is correct (to be used in AFS as a procedure signal)
OLDI	†On line data interchange
OM	Outer marker
OPA	Opaque, white type of ice formation
OPC	Control indicated is operational control
OPMET	†Operational meteorological (information)
OPN	Open or opening or opened
OPR	Operator or operate or operative or operating or operational
OPS	†Operations
O/R	On request
ORD	Indication of an order
OSV	Ocean station vessel
OTP	On top
OTS	Organized track system
OUBD	Outbound
OVC	Overcast

P

P	Maximum values of runway visual range (followed by figures in the METAR/SPECI and TAF)
P	Prohibited area (followed by identifier)
PA	Precision approach
PALS	Precision approach lighting system
PANS	Procedures for air navigation services
PAPI	†Precision approach path indicator
PAR	‡Precision approach radar
PARL	Parallel
PATC	Precision approach terrain chart (followed by name/title)
PAX	Passenger(s)
PBN	Performance-based navigation
PCD	Proceed or proceeding
PCL	Pilot controlled lighting
PCN	Pavement classification number

PDC	‡Pre – departure clearance
PDG	Procedure design gradient
PER	Performance
PERM	Permanent
PIB	Pre-flight information bulletin
PJE	Parachute jumping exercise
PL	Ice pellets
PLA	Practice low approach
PLN	Flight plan
PLVL	Present level
PN	Prior notice required
PNR	Point of no return
PO	Dust/sand whirls (dust devils)
P2	+Prognostic chart for 200 hPa
P3	+Prognostic chart for 300 hPa
P5	+Prognostic chart for 500 hPa
P7	+Prognostic chart for 700 hPa
P85	+Prognostic chart for 850 hPa
Psw	+Prognostic chart of significant weather
PTrVM	+Prognostic tropopause and maximum wind chart
POB	Persons on board
PON	+Pulse modulation, designation of emissions
POSS	Possible
PPI	Plan position indicator
PPR	Prior permission required
PPSN	Present position
PRFG	Aerodrome partially covered by fog
PRI	Primary
PRKG	Parking
PROB	‡Probability
PROC	Procedure
PROV	Provisional
PS	Plus
PSG	Passing
PSN	Position
PSP	Pierced steel plank
PSR	‡Primary surveillance radar
PSYS	Pressure system(s)
PTN	Procedure turn
PTS	Polar track structure
PWR	Power

Q

QDL	Do you intend to ask me for a series of bearings? or I intend to ask for a series of bearings (to be used in radiotelegraphy as a Q Code)
QDM	‡Magnetic heading (zero wind)
QDR	Magnetic bearing
QFE	‡Atmospheric pressure at aerodrome elevation (or at runway threshold)
QFU	Magnetic orientation of runway
QGE	What is my distance to your station or Your distance to my station is (distance figures and units) (to be used in radiotelegraphy as a Q Code)
QJH	Shall I run my test tape/a test sentence or run your test tape/a test sentence (to be used in AFS as a Q Code)
QNH	‡Altimeter sub-scale setting to obtain elevation when on the ground
QSP	Will you relay to ... free of charge or I will relay to ... free of charge (to be used in AFS as a Q Code)
QTA	Shall I cancel telegram number ... ? or cancel telegram number ...
QTE	True bearing

AIP HUNGARY

QTF Will you give me the position of my station according to the bearings taken by the D/F stations which you control or the position of your station according to the bearings taken by the D/F stations that I control was ... latitude ...longitude (or other indication of position), class ... at ... hours (to be used in radiotelegraphy as a Q Code)

QUAD

Quadrant

QUJ

Will you indicate the TRUE track to reach you or The TRUE track to reach me is ... degrees at ... hours (to be used in radiotelegraphy as a Q Code)

R

R Right (preceded by runway designator number to identify a parallel runway)

R Red

R Runway visual range (followed by figures in the METAR/SPECI)

R *Received (acknowledgement of receipt) (to be used in AFS as a procedure signal)

R Restricted area (followed by identification)

R +Radial (VOR)

RA Rain

RAC Rules of the air and air traffic services

RAG Ragged

RAI Runway alignment indicator

RAIM †Receiver autonomous integrity monitoring

RASC †Regional AIS system centre

RASS Remote altimeter setting source

RB Rescue boat

RCA Reach cruising altitude

RCC Rescue coordination centre

RCF Radio communication failure message

RCH Reach or reaching

RCL Runway centre line

RCLL Runway centre line light(s)

RCLR Re cleared

RDH Reference datum height

RDL Radial

RDO Radio

RE Recent (used to qualify weather phenomena e.g. RE RA = recent rain)

REA +Ready message

REC Receive or receiver

REDL Runway edge light(s)

REF Reference to... or refer to...

REG Registration

RENL Runway end light(s)

REP Report or reporting or reporting point

REQ Request or requested

ERTE Reroute

RESA RWY end safety area

RFC +Radio facility chart

RG Range (lights)

RHC Right-hand circuit

RIF Re clearance on flight

RITE Right (direction of turn)

RL Report leaving

RLA Relay to

RLCE Request level change enroute

RLLS Runway lead-in lighting system

RLNA Request level not available

RMAC Radar minimum altitude chart

RMK Remark

RNAV †(to be pronounced "AR-NAV") Area navigation

RNG Radio range

RNP	Required navigation performance
ROBEX	†Regional OPMET bulletin exchange (scheme)
ROC	Rate of climb
ROD	Rate of descent
RON	Receiving only
RPI	‡Radar position indicator
RPL	Repetitive flight plan
RPLC	Replace or replaced
RPS	Radar position symbol
RPT	*Repeat or I repeat (to be used in AFS as a procedure signal)
RQ	*Request (to be used in AFS as a procedure signal)
RQMNTS	Requirements
RQP	Request flight plan (message type designator)
RQS	Request supplementary flight plan (message type designator)
RR	Report reaching
RRA	(or RRB, RRC... etc. in sequence) Delayed meteorological message (message type designator)
RSC	Rescue sub-centre
RSCD	Runway surface condition
RSP	Responder beacon
RSR	En-route surveillance radar
RTD	Delayed (used to indicate delayed meteorological message; message type designator)
RTE	Route
RTF	Radio telephone
RTG	Radio telegraph
RTHL	Runway threshold light(s)
RTN	Return or returned or returning
RTODAH	Rejected take-off distance available helicopter
RTS	Return to service
RTT	Radio teletypewriter
RTZL	Runway touchdown zone light(s)
RUT	Standard regional route transmitting frequencies
RV	Rescue vessel
RVR	‡Runway visual range
RVSM	‡Reduced Vertical Separation Minima (300 m/1000 ft between FL 290 and FL 410)
RWY	Runway

S

S	State of the sea (followed by figures in METAR/SPECI)
S	South or Southern latitude
SA	Sand
SALS	Simple approach lighting system
SAN	Sanitary
SAP	As soon as possible
SAR	Search and rescue
SARPS	Standards and recommended practices (ICAO)
SAT	Saturday
SATCOM	†Satellite communication
SB	Southbound
SBAS	†Satellite-based augmentation system (to be pronounced "SS-BASS")
SC	Stratocumulus
SCT	Scattered
SDBY	Stand by
SE	South-east
SEA	Sea (used in connection with sea-surface temperature and state of the sea)
SEB	South-eastbound
SEC	Seconds
SECN	Section

AIP HUNGARY

SECT	Sector
SELCAL	†Selective calling system
SEP	September
SER	Service or servicing or served
SEV	Severe (used e.g. to qualify icing and turbulence reports)
SFC	Surface
SG	Snow grains
SGL	Signal
SH	Showers (followed by RA = rain, SN = snow, PE = ice pellets, GR = hail, GS = small hail and/or snow pellets or combinations, thereof, e.g SHRASN = showers of rain and snow)
SHF	Super high frequency (3000 to 30000 Mhz)
SID	†Standard instrument departure
SIF	Selective identification feature
SIG	Significant
SIGMET	†Information concerning en-route weather phenomena which may effect the safety of aircraft operations
SIMUL	Simultaneous or simultaneously
SIWL	Single isolated wheel load
SKED	Schedule or scheduled
SLAP	+Slot allocation procedure
SLP	Speed limiting point
SLT	+Slot allocation message
SLW	Slow
SMC	Surface movement control
SMR	Surface movement radar
SN	Snow
SNOCLO	Aerodrome closed due to snow (used in METAR/SPECI)
SNOWTAM	†A special series NOTAM notifying the presence or removal of hazardous conditions due to snow, ice, slush or standing water associated with snow, slush and ice on the movement area, by means of a specific pro format.
SOC	+Start of climb
SPECI	†Aviation selected special weather report (in aeronautical meteorological code)
SPECIAL	†Special meteorological report (in abbreviated plain language)
SPL	Supplementary flight plan message
SPOC	SAR point of contact
SPOT	†Spot wind
SQ	Squall
SQL	Squall line
SR	Sunrise
SRA	Surveillance radar approach
SRE	Surveillance radar element of precision approach radar system
SRG	Short range
SRR	Search and rescue region
SRQ	+Slot request message
SRY	Secondary
SS	Sandstorm
SS	Sunset
SSB	Single sideband
SSE	South-south-east
SSR	‡Secondary surveillance radar
SST	Supersonic transport
SSW	South-south-west
ST	Stratus
STA	Straight in approach
STAR	†Standard (instrument) arrival
STD	Standard
STF	Strati form
STN	Station

STNR	Stationary
STOL	Short take-off and landing
STS	Status
STWL	Stopway light(s)
SUBJ	Subject to
SUN	Sunday
SUP	Supplement (AIP supplement)
SUPPS	Regional supplementary procedures
SVC	Service message
SVCBL	Serviceable
SW	South-west
SWB	South-westbound
SWY	Stopway
S6	+6-hourly surface synoptic chart

T

T	Temperature
T	True (preceded by a bearing to indicate reference to True North)
TA	Transition altitude
TAA	Terminal arrival altitude
TACAN	UHF tactical air navigation aid
TAF	†Aerodrome forecast
TAIL	†Tail wind
TAR	Terminal area surveillance radar
TAS	True airspeed
TAX	Taxiing or taxi
TC	Tropical cyclone
TCA	+Area of responsibility of TMA sector
TCP	+Transfer of control point
TCU	Towering cumulus
TDA	+Area or responsibility of BUDAPEST DIRECTOR
TDO	Tornado
TDZ	Touchdown zone
TECR	Technical reason
TEL	Telephone
TEMPO	†Temporary or temporarily
TEND	†Trend forecast
TFC	Traffic
TGL	Touch-and-go landing
TGL	+Temporary Guidance Leaflet
TGS	Taxiing guidance system
THR	Threshold
THRU	Through
THU	Thursday
TIBA	†Traffic information broadcast by aircraft
TIL	†Until
TIP	Until past... (place)
TIZ	+Traffic Information Zone
TKOF	Take-off
TL	Till (followed by time which weather change is forecast of end)
TLOF	Touchdown and lift-off area
TMA	Terminal control area
TN	Minimum temperature (followed by figures in TAF)
TNA	Turn altitude
TNH	Turn Height
TO	To... (place)
TOC	Top of climb
TODA	Take-off distance available

AIP HUNGARY

TODAH	Take-off distance available, helicopter
TOP	†Cloud top
TORA	Take-off run available
TOX	Toxic
TP	Turning point
TR	Track
TRA	Temporary reserved airspace
TRANS	Transmits or transmitter
TREND	Trend forecast
TRCC	+Terminal Radar Control Centre
TRL	Transition level
TROP	Tropopause
TS	Thunderstorm (in aerodrome reports and forecasts, TS used alone means thunder heard but no precipitation at the aerodrome).
TS	Thunderstorm (followed by RA=rain, SN=snow, PE=ice pellets, GA=hail, GS=small hail and/or snow pellets or combinations thereof, e.g. TSRASN=thunderstorm with rain and snow)
TSA	+Temporary Segregated Area
TT	Teletypewriter
TUE	Tuesday
TURB	Turbulence
T-VASIS	†(to be pronounced "TEE -VASIS") T visual approach slope indicator system
TVOR	Terminal VOR
TWR	Aerodrome control tower or aerodrome control
TWY	Taxiway
TWYL	Taxiway-link
TX	Maximum temperature (followed by figures in TAF)
TXT	*Text /when the abbreviation is used to request a repetition, the question mark (IMI) precedes the abbreviation, e.g. IMI TXT/ (to be used in AFS as a procedure signal)
TYP	Type of aircraft
TYPH	Typhoon
U	
U	Upward (tendency in RVR during previous 10 minutes)
UA	Unmanned aircraft
UAB	Until advised by...
UAC	Upper area control centre
UAR	Upper air route
UAS	Unmanned aircraft system
UDF	Ultra high frequency direction-finding station
UFN	Until further notice
UHDT	Unable higher due traffic
UHF	‡Ultra high frequency (300 to 3000 Mhz)
UIC	Upper Information Centre
UIR	‡Upper Flight Information Region
ULR	Ultra long range
UNA	Unable
UNAP	Unable to approve
UNL	Unlimited
UNREL	Unreliable
UP	Unidentified precipitation (used in automated METAR/SPECI)
U/S	Unserviceable
USD	+US dollar
UTA	‡Upper control area
UTC	Coordinated universal time
U2	+200 hPa chart
U3	+300 hPa chart
U4	+400 hPa chart

U5	+500 hPa chart
U7	+700 hPa chart
U25	+250 hPa chart
U85	+850 hPa chart

V

V	Variations from the mean wind direction (preceded and followed by figures in the METAR/SPECI, e.g. 350V070)
VA	Volcanic ash
VAC	Visual approach chart (followed by name/title)
VAL	In valleys
VAN	Runway control van
VAR	Magnetic variation
VAR	Visual-aural radio range
VASIS	Visual approach slope indicator systems
VC	Vicinity of the aerodrome (followed by FG=fog, FC=funnel cloud, PO=dust/sand whirls, BLDU=blowing dust, BLSA=blowing sand or BLSN=blowing snow, e.g. VC FG=vicinity fog)
VCY	Vicinity
VDF	Very high frequency direction finding station
VER	Vertical
VFR	‡Visual flight rules
VHF	‡Very high frequency (30 to 300 Mhz)
VIP	‡Very important person
VIS	Visibility
VLF	Very low frequency 3 to 30 kHz)
VLR	Very long range
VMC	‡Visual meteorological conditions
VOLMET	†Meteorological information for aircraft in flight
VOR	‡VHF omnidirectional radio range
VORTAC	†VOR and TACAN combination
VOT	VOR airborne equipment test facility
VPA	Vertical pass angle
VPT	Visual manoeuvre with prescribed track
VRB	Variable
VSA	By visual reference to the ground
VSP	Vertical speed
VTOL	Vertical take-off and landing
VV	Vertical visibility (followed by figures in METAR/SPECI and TAF)
VWS	+Vertical wind shear

W

W	Sea-surface temperature (followed by figures in METAR/SPECI)
W	West or western longitude
W	White
WAAS	†Wide area augmentation system
WAC	World Aeronautical Chart – ICAO 1 : 1 000 000 (followed by name/title)
WAFC	World Area Forecast Centre
WB	Westbound
WBAR	Wing bar lights
WD	+Working day
WDI	Wind direction indicator
WDSRP	Widespread
WE	+Weekend
WED	Wednesday
WEF	With effect from or effective from
WGS-84	World geodetic system- 1984
WI	Within

AIP HUNGARY

WID	Width
WIE	With immediate effect or effective immediately
WILCO	†Will comply
WIND	Wind
WIP	Work in progress
WKN	Weaken or weakening
WMO	+World Meteorological Organization
WNW	West-north-west
WO	Without
WPT	Way-point
WRNG	Warning
WS	Wind shear
WSPD	Wind speed
WSW	West-south-west
WT	Weight
WTSPT	Waterspout
WWW	World wide web
WX	Weather
X	
X	Cross
XBAR	Crossbar (of approach lighting system)
XNG	Crossing
XS	Atmospherics
Y	
Y	Yellow
YCZ	Yellow caution zone (runway lighting)
YES	*Yes (affirmative) (to be used in AFS as a procedure signal)
YR	Your
Z	
Z	Coordinated Universal Time (in meteorological messages)

THIS PAGE INTENTIONALLY LEFT BLANK

GEN 2.3 CHART SYMBOLS

1. GENERAL SYMBOLS

Figure 1. Aerodromes

	Aerodrome, runway pattern
	Paved runway (Aeronautical Chart - ICAO 1:500 000)
	Civil aerodrome
	Military aerodrome
	Abandoned or closed aerodrome
	Heliport, helicopter alighting area on an aerodrome

Figure 2. Radio navigation aids

	Basic radio navigation aid symbol
	Non-directional radio beacon (NDB)
	VHF omnidirectional radio range (VOR)
	Distance measuring equipment (DME)
	Collocated VOR and DME radio navigation aids (VOR/DME)
	VOR radial (degree); DME distance (NM)
	Compass rose
	Radio marker beacon
	Instrument landing system (ILS) course (Instrument Approach Chart)

Profiles for radio navigation aids (Instrument Approach Chart)

ILS with course, descent gradient, angle

Distances between the beacons (NM)

RWY

Crossing altitude (height) in ft

Navaid labels

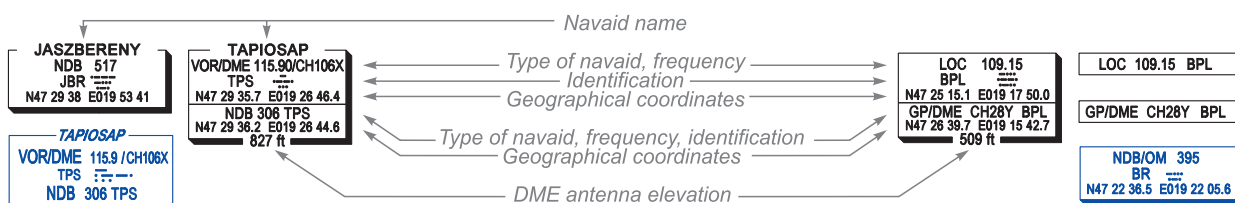


Figure 3. Air traffic services

			Flight Information Region (FIR)
			Terminal Control Area (TMA/MTMA); Control Area (CTA)
			Control Zone (CTR/MCTR)
			Free Route Airspace (FRA) (Enroute Chart - ICAO)
			Traffic Information Zone (TIZ)
			<p>Aeronautical Chart - ICAO 1:500 000 : callsign, frequency, airspace classification, vertical limits, airspace name and type</p>
		Aerial sporting and recreational activities with designator and vertical limits	
		Bird migration and areas with sensitive fauna with designator and vertical limits (upper limit)	
			Reporting point - compulsory; on request
			Final approach fix (FAF), Final approach point (FAP)
			Altitudes levels ("at or above", "at or below", "mandatory", "window")
			Waypoint - fly-by; fly-over with crossing altitude
			Terminal route segment - instrument with designator, length (NM), minimum obstacle clearance altitude, course
			Terminal route segment - visual with designator, altitude, course
			Scale-break on route
			Holding pattern with altitude and course
			Missed approach track

Figure 4. Air restrictions

			Prohibited area with designator and vertical limits (upper limit)
			Restricted area with designator and vertical limits (upper limit)
			Danger area with designator and vertical limits (upper limit)
			Temporarily restricted area with designator and vertical limits

Figure 5. Obstacles

	Obstacle; Group obstacles; Lighted obstacle; Lighted group obstacles
	Exceptionally high obstacle; Exceptionally high obstacle lighted
	Wind turbine; Wind turbines in minor group
	Elevation and (height) of top in ft
	Spot elevation (height) in ft
	Prominent transmission line

2. MISCELLANEOUS

Figure 6. Symbols for En-route Charts

	Minimum off-route altitude (Grid MORA) - example: 5200 ft
	Isogonic line

Figure 7. Symbols for SID/STAR/Instrument Approach Charts

	Minimum sector altitude; Hypsometry
	City or large town; Hydrography

Figure 8. Symbols for Aerodrome / Heliport Charts

	Area suitable for aircraft movement (asphalt, concrete, grass)
	Runway designation; Stopway (SWY); Strip
	Taxiway sign and segment boundary
	Aerodrome boundary; Aerodrome reference point (ARP)
	VOR check-point; Runway visual range (RVR) observation site
	Runway-holding position (Pattern A, B); Intermediate holding position
	Stop bar; Sign-board; No entry; Wind direction indicator
	Other aerodrome equipment; Meteorological equipment
	Point lights (see details on charts)
	Taxiway centre line; Aircraft stand taxilane centre line
	Number of aircraft stand
	Boundary of the air traffic control service
	Aerodrome control tower; Building; Fence
	Service road, public road; Important dirt-road; Railway tracks

Figure 9. Symbols for Obstacle Charts - Type A








	Area suitable for aircraft movement (asphalt, concrete, grass)
	Stopway (SWY); Strip
	Take-off flight path; Take-off flight path area
	Tree or shrub; Pole, tower, spire, antenna, etc.; Identification number
	Built-up area; Forest area, etc.

Figure 10. Symbols for Visual Approach Charts

<i>Under development</i>

Figure 11. Symbols for Aeronautical Chart - ICAO 1:500 000

	Area minimum altitude - example: 1300 ft
	Isogonic line
<i>Culture, hydrography and topography symbols see details on chart.</i>	

GEN 3.2 AERONAUTICAL CHARTS

1. RESPONSIBLE SERVICES

- 1.1. The aeronautical charts for the territory of Hungary are published by the HungaroControl Pte. Ltd. Co.
- 1.2. The aeronautical charts published in AIP HUNGARY are produced in accordance with the provisions contained in ICAO Annex 4 - Aeronautical Charts 10. Edition with the differences listed in subsection *GEN 1.7* and conform with the provisions set forth in ICAO Aeronautical Charts Manual (DOC 8697).

2. MAINTENANCE OF CHARTS

- 2.1. The aeronautical charts included in the AIP are regularly kept up-to-date or are replaced by the amendments to the AIP. Significant amendments or revisions in aeronautical information to aeronautical chart 1:500000 are also included in the AIP and may be promulgated in NOTAM, if appropriate. Information concerning new maps and charts will be notified by Aeronautical Information Circular.
- 2.2. Items of information found after publication having been incorrect at the aeronautical information date, are corrected immediately by NOTAM if they are of operational significance, attention being directed to the particular chart affected.
- 2.3. Revision of the aeronautical information on all charts have constantly been in progress and amended reprints are published as regularly as production resources permit. Topographical and hydro graphical information portrayed are also revised when necessary.

3. PURCHASE ARRANGEMENTS

- 3.1. The charts as listed under may be obtained from:

HungaroControl

Aeronautical Information Service

Post:H-1675 Budapest P. O. Box 80.

4. AERONAUTICAL CHART SERIES AVAILABLE

- 4.1. The following types of charts are published and available at present:

1. Aeronautical Chart - ICAO 1: 500 000
2. Aerodrome Chart
3. Aerodrome Ground Movement Chart
4. Aircraft Parking/Docking Charts - ICAO
5. Aerodrome Obstacle Chart - ICAO Type "A"
6. Precision approach terrain chart - ICAO
7. Enroute Chart - ICAO
8. Prohibited, restricted and danger areas chart
9. Temporarily Segregated Areas
10. Instrument Approach Charts - ICAO
11. Visual Approach Chart - ICAO
12. Standard Instrument Departures Charts - ICAO

A general description and explanation of the intended use of aeronautical charts listed above are given in para 4.2.

4.2 General description of each series**4.2.1 Aeronautical chart - ICAO 1:500000**

This coloured chart is produced in conform conic projection and consists of one sheet.

The chart covers the area of 4540N to 4840N and from 1600E to 2300E. The topographic basis of the chart comprises built-up areas, railroads, roads, hydrography, topography, significant landmarks and political boundaries.

The aeronautical overprint includes the structure of airspaces, aerodromes, radio navigation facilities with names, frequencies and identification, known obstructions and isogonal information. This chart is designed to serve as a basic aeronautical chart for low speed visual air navigation and for preflight planning of operation.

4.2.2 Aerodrome chart

These charts provide information on the movement area of public aerodromes published in Part AD (runways, taxiways and apron) and portrays the site of major flight operation facilities.

4.2.3 Aerodrome ground movement chart

These charts at a scale of 1:10000 or 1:7 500 provides flight crews with detailed information to facilitate ground movement of aircraft to and from aircraft stands.

4.2.4 Aircraft parking/docking charts

These charts at a scale of 1:5000 or 1:2000 give more detailed information on the parking areas and procedures, being blown-up parts of the aerodrome ground movement chart above.

4.2.5 Aerodrome obstacle charts

The Aerodrome Obstacle Charts, Type "A" are available for Budapest Liszt Ferenc International Airport. The horizontal scale of these charts are 1:20000 or 1:12 500 and they show the obstacles in the final approach/take-off flight path areas. The charts are included in part AD.

4.2.6 Precision approach terrain chart

These charts provide detailed terrain profile information of the final approach areas so as to enable aircraft operators to assess the effect of the terrain on decision height determination by the use of radio altimeters. These charts are included in part AD.

4.2.7 En-route chart

This chart is produced at a scale of 1:1000000.

The basic print is pale grey and the aeronautical information are of dark blue, magenta and green colour.

The function of these charts is to facilitate the task of flight crews in navigating by radio aids and significant points, in compliance with ATS procedures, during flights within Budapest FIR. The charts contain all the information relevant to the structure of controlled and uncontrolled airspaces, and the radio navigation facilities, type of service, identification, frequencies, and position coordinates.

The chart is included in part ENR 6.

4.2.8 Area chart

Not produced.

4.2.9 Prohibited, restricted and danger areas chart

The prohibited, restricted and danger areas relevant to the ATS airspaces shown on the enroute and area charts are depicted with their identification and vertical limit on a separate sheet at a scale of 1:1500000 to avoid congestion on these charts. This separate sheet is in Part ENR 6 in a consecutive order with the tabular presentation.

4.2.10 Temporarily segregated areas

The temporarily segregated areas - as relevant to the ATS airspaces - shown on the en-route and area charts are depicted with their identification and vertical limit on a separate sheet at a scale of 1:1500000 to shown the graphic lateral portrayal of those listed on pages ENR 5.2-1, 5.2-2.

This chart is included in part ENR 6.

4.2.11 Instrument approach charts

These charts are produced for each instrument approach procedure available at aerodromes. The basic print is pale grey and the aeronautical information are of dark blue colour.

Way points are shown in green overlay to facilitate BRNAV operations.

These charts are at a scale of 1:250000 and included in part AD 2.

4.2.12 Visual approach charts

These charts are produced at different scales on coloured topographic base. The primary function is to provide information on the visual approach procedures applicable at aerodromes published in Part AD 2. The holding patterns and minimum holding altitudes associated with the approach procedures are shown.

4.2.13 Standard instrument departures charts

These charts at a scale of 1:500000 or 1:250 000 provide flight crew with information to enable them to comply with the designed standard instrument departure route from the take-off to the en-route phase of flight. Each chart includes relevant aeronautical information as well as the textual description of the designated standard instrument departure routes (SID).

Way points are shown in green overlay to facilitate BRNAV operations.

5. LIST OF AERONAUTICAL CHARTS AVAILABLE

All series listed are part of the AIP

Title of series	Scale	Name and/or number	Price (HUF)	Date
Aeronautical Chart - ICAO		Hungary		
	1:500 000	2252-B 2251A	1600.-	25 JUL 2013
En-route Chart - ICAO		Hungary		
	1:1 000 000	ENR 6-LHCC-ERC	500.-	05 FEB 2015
Appendix to En-route Chart - ICAO	Nil	ENR 6-LHCC-ERC-MISC 1-3	500.-	05 FEB 2015
Military Exercise Areas		Hungary		
	1:1 500 000	ENR 6-LHCC-TRA	200.-	03 JUL 2008
P/R/D Areas		Hungary		
	1:1 500 000	ENR 6-LHCC-PRD	200.-	18 NOV 2010
Aerodrome Chart - ICAO		Békéscsaba		
	1:10 000	AD 2-LHBC-ADC	200.-	14 NOV 2013
		Budapest/Liszt Ferenc International Airport		
	1:25 000	AD 2-LHBP-ADC	200.-	18 SEP 2014
Appendix 1 to ADC	Nil	AD 2-LHBP-MISC-ARR	200.-	25 JUL 2013
Appendix 2 to ADC	Nil	AD 2-LHBP-MISC-DEP	200.-	25 JUL 2013
		Debrecen		
	1:10 000	AD 2-LHDC-ADC	150.-	14 NOV 2013
		Nyíregyháza		
	1:7 500	AD 2-LHNY-ADC	150.-	25 JUL 2013
		Győr/Pér		
	1: 10 000	AD 2-LHPR-ADC	200.-	26 JUN 2014
		Hévíz/Balaton		
	1:10 000	AD 2-LHSM-ADC	150.-	14 NOV 2013
		Pécs/Pogány		
	1:10 000	AD 2-LHPP-ADC	150.-	26 JUN 2014
Aerodrome Obstacle Chart - ICAO - Type A		Budapest/Liszt Ferenc International Airport		
	1:20 000	RWY 13R/31L AD 2-LHBP-AOC/A 13R/31L	150.-	25 AUG 2011
	1:20 000	RWY 13L/31R AD 2-LHBP-AOC/A 13L/31R	150.-	25 AUG 2011
		Debrecen		
	1:12 500	AD 2-LHDC-AOC/A	200.-	26 AUG 2010
		Pécs/Pogány		
	1:20 000	AD 2-LHPP-AOC/A	200.-	26 AUG 2010
		Hévíz/Balaton		
	1:20 000	AD 2-LHSM-AOC/A	200.-	20 SEP 2012
Aircraft Parking/Docking Chart - ICAO		Budapest/Liszt Ferenc International Airport		
	1:5 000	AD 2-LHBP-PDC/1	200.-	14 NOV 2013
	1:5 000	AD 2-LHBP-PDC/2	200.-	30 MAY 2013
	1:5 000	AD 2-LHBP-PDC/3	200.-	30 MAY 2013

Title of series	Scale	Name and/or number	Price (HUF)	Date
Instrument Approach Chart - ICAO		Békéscsaba		
	1:275 000	AD 2-LHBC-NDB 17L	200.-	14 NOV 2013
	1:275 000	AD 2-LHBC-NDB 35R	200.-	14 NOV 2013
	1:275 000	AD 2-LHBC-RNAV (GNSS) 17L	200.-	14 NOV 2013
	1:275 000	AD 2-LHBC-RNAV (GNSS) 35R	200.-	14 NOV 2013
		Budapest/Liszt Ferenc International Airport		
	1:300 000	AD 2-LHBP-ILS/LOC-13L	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-VOR-13L	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-NDB-13L	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-ILS/LOC-13R	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-ILS/LOC-31L	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-VOR-31L	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-NDB-31L	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-ILS/LOC-31R	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-VOR-31R	200.-	26 JUN 2014
	1:300 000	AD 2-LHBP-NDB-31R	200.-	26 JUN 2014
		Debrecen		
	1:250 000	AD 2-LHDC-ILS 05R	200.-	26 AUG 2010
	1:250 000	AD 2-LHDC-NDB 23L	200.-	26 AUG 2010
	1:250 000	AD 2-LHDC-RNAV (GNSS) 05R	200.-	26 AUG 2010
1:250 000	AD 2-LHDC-RNAV (GNSS) 23L	200.-	26 AUG 2010	
	Fertőszentmiklós			
1:175 000	AD 2-LHFM-RNAV (GNSS) 16(A,B)	200.-	26 AUG 2010	
1:175 000	AD 2-LHFM-RNAV (GNSS) 34(A,B)	200.-	26 AUG 2010	
	Győr/Pér			
1:250 000	AD 2-LHPR-VOR-12	200.-	18 SEP 2014	
1:250 000	AD 2-LHPR-ILS/LOC-30	200.-	05 FEB 2015	
1:250 000	AD 2-LHPR-VOR-30	200.-	05 FEB 2015	
1:250 000	AD 2-LHPR-RNAV-12	200.-	05 FEB 2015	
1:250 000	AD 2-LHPR-RNAV-30	200.-	05 FEB 2015	
	Pécs/Pogány			
1:250 000	AD 2-LHPP-NDB-16	200.-	18 NOV 2010	
1:250 000	AD 2-LHPP-ILS-34	200.-	26 AUG 2010	
	Hévíz/Balaton			
1:250 000	AD 2-LHSM-ILS/LOC-16	200.-	05 FEB 2015	
1:250 000	AD 2-LHSM-NDB-16	200.-	05 FEB 2015	
1:250 000	AD 2-LHSM-NDB-34	200.-	05 FEB 2015	
1:250 000	AD 2-LHSM-RNAV (GNSS) 16	200.-	20 SEP 2012	
1:250 000	AD 2-LHSM-RNAV (GNSS) 34	200.-	20 SEP 2012	
Precision Approach Terrain Chart - ICAO		Budapest/Liszt Ferenc International Airport		
	1:2000	AD 2-LHBP-PATC 13R/31L	100.-	25 AUG 2011

Title of series	Scale	Name and/or number	Price (HUF)	Date
	1:2000	AD 2-LHBP-PATC 13L/31R	100.-	25 AUG 2011
Standard Arrival Chart - Instrument (STAR) - ICAO		Debrecen		
	1:250 000	AD 2-LHDC STAR	200.-	26 AUG 2010
Standard Departure Chart - Instrument (SID) - ICAO		Budapest/Liszt Ferenc International Airport		
	1:500 000	RWY 13L/13R AD 2-LHBP-SID 13	200.-	26 JUN 2014
	1:500 000	RWY 31L/31R AD 2-LHBP-SID 31	200.-	26 JUN 2014
		Debrecen		
	1:250 000	AD 2-LHDC SID05R	200.-	26 AUG 2010
	1:250 000	AD 2-LHDC SID23L	200.-	26 AUG 2010
		Győr/Pér		
	1:250 000	AD 2-LHPR-SID-12	200.-	06 FEB 2014
	1:250 000	AD 2-LHPR-SID-30	200.-	25 JUL 2013
		Hévíz/Balaton		
	1:250 000	AD 2-LHSM SID16	200.-	05 FEB 2015
	1:250 000	AD 2-LHSM SID34	200.-	05 FEB 2015
Visual Approach Chart - ICAO		Békéscsaba		
	1:75 000	AD 2-LHBC-VAC	400.-	14 NOV 2013
		Budapest/Liszt Ferenc International Airport		
	1:125 000	AD 2-LHBP-VAC	400.-	14 NOV 2013
		Debrecen		
	1:75 000	AD 2-LHDC-VAC	400.-	26 AUG 2010
		Fertőszentmiklós		
	1:75 000	AD 2-LHFM-VAC	400.-	26 AUG 2010
		Győr/Pér		
	1:75 000	AD 2-LHPR-VAC	400.-	26 JUN 2014
		Pécs/Pogány		
	1:75 000	AD 2-LHPP-VAC	400.-	26 AUG 2010
		Hévíz/Balaton		
	1:75 000	AD 2-LHSM-VAC	400.-	20 SEP 2012
		Szeged		
	1:75 000	AD2-LHUD-VAC	400.-	26 JUN 2014
GPS/FMS RNAV Arrival Chart Transition to Final Approach		Budapest/Liszt Ferenc International Airport		
	1:500 000	AD 2-LHBP-ARR 13L	200.-	26 JUN 2014
	1:500 000	AD 2-LHBP-ARR 13R	200.-	26 JUN 2014
	1:500 000	AD 2-LHBP-ARR-31L	200.-	26 JUN 2014
	1:500 000	AD 2-LHBP-ARR 31R	200.-	26 JUN 2014

GEN 3.3 AIR TRAFFIC SERVICES

1. RESPONSIBLE SERVICE

The National Transport Authority Aviation Authority (NTA AA)

exercises the direct supervision upon the HungaroControl, Hungarian Air Navigation Services Pte. Ltd. Co. HungaroControl is the responsible organization for the provision of air traffic services for civil aviation.

HungaroControl

Post:H-1675 Budapest P. O. Box 80.

Phone:(361) 293-4000

Fax:(361) 293-4001

AFS:LHBPYFYX

Email:hc@hungarocontrol.hu

URL:http://www.hungarocontrol.hu

The services are provided in accordance with the provisions contained in the following ICAO documents:

- Doc 7300 - Convention on International Civil Aviation
- Annex 2 - Rules of the Air
- Annex 11 - Air Traffic Services
- Doc 4444 - Procedures for Air Navigation Services - Rules of the Air and Air Traffic Services (PANS-ATM)
- Doc 8168 - Procedures for Air Navigation Services - Aircraft Operations (PANS-OPS)
- Doc 7030 — Regional Supplementary Procedures (EUR Region)

Differences to these provisions are detailed in *GEN 1.7*

2. AREA OF RESPONSIBILITY

The area of responsibility of the Hungarian air traffic service is the entire territory of Hungary.

The area of responsibility covers additionally the parts of adjacent foreign airspace, within which the provision of the air traffic services has been delegated to HungaroControl on the basis of agreement with the appropriate foreign units. On the other hand, the provision of the ATS was delegated for specific parts of the FIR Budapest like manner to foreign air traffic service units.

The areas of responsibility are indicated by their co-ordinates in *ENR 2.2.* and depicted on aeronautical charts.

3. TYPES OF SERVICES**3.1 Air Traffic Services (ATS)**

The following types of services are provided:

- Air Traffic Control service(ATC),
- Flight Information Service (FIS),
- Alerting Service (ALRS).

3.1.1 Air Traffic Control service

The air traffic control service is subdivided in:

- area control service (ACC),
- approach control service (APP),

- aerodrome control service (TWR).

ATC is provided to all flights (IFR and VFR) in class C airspace.

3.1.2 Flight Information Service

The Flight Information Service is subdivided in:

- Flight Information Centre (FIC),
- Aerodrome Flight Information Service (AFIS)

FIS is provided to all aircraft which are likely to be affected by the information and which are:

- a. provided with ATC service; or
- b. known to the relevant ATS unit and in two-way radio contact with it.

3.1.2.1 FIC provides information and services:

- SIGMET, aerodrome met. reports, forecasts and weather conditions that likely make operation under VFR impracticable, as appropriate;
- changes in the serviceability of navigation aids;
- other known air traffic to assist pilot to avoid collision;
- unnamed free balloons;
- activity of danger and temporary restricted areas;
- operational hours of aerodromes; and
- any other circumstances likely affect safety;
- altimeter setting (QNH);
- assistance for Search- and Rescue (SAR) operations;
- activation and closure of Flight Plans.

3.1.2.2 AFIS provides information:

The purpose of AFIS is to provide information necessary for the safe and efficient conduct of flight operations in the vicinity of the aerodrome and on the manoeuvring area. It shall be noted, that the pilot-in-command is - on the basis of the Rules of the Air, the information received and the use of his or her own judgment - responsible to maintain safe distance to other traffic as well as to report own intentions.

3.2 Alerting Service

ALRS is provided:

- a. to all aircraft provided with ATC service;
- b. in so far as practicable, to all other aircraft having filed a flight plan or otherwise known to the air traffic service units.

4. COORDINATION BETWEEN THE OPERATORS AND ATS

Coordination between the operators and air traffic services is effected in accordance with the relevant provisions of Annex 11, and the PANS-RAC (Doc 4444 - ATM/501).

5. MINIMUM FLIGHT ALTITUDES

The minimum flight altitudes have been determined for 1° geographical areas and provided a minimum terrain clearance of 1000 FT over lowlands and 2000 FT over mountainous areas. The area minimum altitudes are depicted on chart ENR 6-LHCC-ERC -1. The minimum flight altitudes for a given flight shall be determined based on the area minimum altitudes depicted on chart ENR 6-LHCC-ERC -1.

GEN 4 CHARGES FOR AERODROMES/HELIPORTS AND AIR NAVIGATION SERVICES

GEN 4.1 AERODROME/HELIPORT CHARGES

A landing charge shall be paid for the use of the runways and/or taxiways of an airport (including the lighting charges) for each 1000 kgs of the aircraft's take-off mass. Each fraction of 1 metric ton shall be counted as a whole metric ton.

1. BUDAPEST LISZT FERENC INTERNATIONAL AIRPORT

For aerodrome charges visit the home page of National Transport Authority:

URL:<http://www.nkh.hu/Repules/kozerdinfo/Lapok/default.aspx>

then navigate to "Tariff Manual".

2. DEBRECEN**2.1**

For aerodrome charges visit the home page of Debrecen International Airport:

URL:<http://www.debrecenairport.com/airportcharges/>

For Ground Handling fees contact the Operations Department:

Phone:+36 52 500 548

Email:opsatdebrecenairport.com.

2.2**2.3****2.4****2.5**

3. FERTŐSZENTMIKLÓS

3.1 Landing of aircraft

- 6,00 USD/1000 kgs

Note:

Outside the hours of operation availability fee has to be paid. The fee is 10,00 USD/hour.

Discounts

	till 1000 kgs	from 1000 kgs
Training flight	40%	50%
Test flight	40%	50%
Authority check flight	40%	50%

3.2 Parking, hangarage and long-term storage of aircraft

- 2,00 USD/24 hours/1000 kgs (open air)
- 6,00 USD/24 hours/1000kgs (in hangar)

Note:

The first 3 hours of parking is free of charge, later every opened day is considered to be a full day.

3.3 Passenger service

- 3 USD/ departing passenger

Note:

Passenger service charge in case of parachute jumping may be subject to special arrangements.

4. NYIREGYHÁZA

4.1 Landing of aircraft

Aircraft mass in kgs	EUR/1000 kgs
up to 3.000	7.00
3.001 - 6.000	8.00
from 6.001	9.00

Note:

For use of RWY lighting an extra fee 30 EUR/occasion shall be paid.

RWY lighting fee for training flights is detailed in a special list available at the aerodrome operator.

For flight operation outside the normal operational hours, disposal charge shall be paid, which is 20 EUR/hour.

For customs and immigration an extra fee shall be paid, for detailed information contact aerodrome operator.

4.2 Parking, hangarage and long-term storage of aircraft

- 3 EUR/24 hours/1000 kgs (open air)
- 6,00 EUR/24 hours/1000kgs (in hangar)

Note:

Parking not exceeding 3 hours will not be charged, parking over 3 hours will be considered as 24 hours.

8. SZEGED**8.1 Landing of aircraft**

Aircraft mass in kgs	Landing/Take-off (HUF)	Training flights (touch and go) (HUF)
0 - 800	600	300
801 - 2.000	1.200	600
2001 -	900 / t	450 / t

Note:

With the exception of the airport contractual partners. In the above prices the VAT to be paid is not included.

8.2 Parking, hangarage and storage of aircraft

Aircraft mass in kgs	Open air (HUF)	In hangar (HUF)
0 - 800	600	2.100
801 - 2.000	1.200	2.700
2001-	1.000 / t	2.400 / t

Note:

With the exception of the airport contractual partners. In the above prices the Value Added Tax to be paid is not included.

The first 2 hours of open air parking is free of charge, parking over 2 hours will be considered as 24 hours.

8.3 Other

- Border crossing fee (for flights outside Schengen area):
 - weekdays BTN 0700-1500: 17.000 HUF+VAT/Hour/ACFT and every additional hour 8.000 HUF+VAT;
 - weekdays BTN 1500-2100: 21.000 HUF+VAT/Hour/ACFT and every additional hour 11.000 HUF+VAT;
 - weekends and holidays 27.000 HUF+VAT/Hour/ACFT and every additional hour 14.000 HUF+VAT.
- Outside the operational hours (including aeronautical fee, RWY lighting fee): 1.750 HUF / 15 minutes.

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 0.6 TABLE OF CONTENTS

ENR 0.1	PREFACE	ENR 0.1 - 1
ENR 0.2	RECORD OF AIP AMENDMENTS	ENR 0.2 - 1
ENR 0.3	RECORD OF AIP SUPPLEMENTS	ENR 0.3 - 1
ENR 0.4	CHECK LIST OF AIP PAGES	ENR 0.4 - 1
ENR 0.5	LIST OF HAND AMENDMENTS	ENR 0.5 - 1
ENR 0.6	TABLE OF CONTENTS	ENR 0.6 - 1

ENR 1 GENERAL RULES AND PROCEDURES

ENR 1.1	GENERAL RULES	ENR 1.1 - 1
1.	GENERAL	ENR 1.1 - 1
2.	Procedures within uncontrolled airspace	ENR 1.1 - 1
ENR 1.2	VISUAL FLIGHT RULES	ENR 1.2 - 1
1.	General rules	ENR 1.2 - 1
2.	Restrictions for VFR flights	ENR 1.2 - 1
ENR 1.3	INSTRUMENT FLIGHT RULES	ENR 1.3 - 1
1.	Rules applicable to all IFR flights	ENR 1.3 - 1
2.	Rules applicable to IFR flight within controlled airspace	ENR 1.3 - 2
3.	Rules applicable to IFR flights outside controlled airspace	ENR 1.3 - 2
4.	FREE ROUTE AIRSPACE GENERAL PROCEDURES	ENR 1.3 - 3
ENR 1.4	ATS AIRSPACE CLASSIFICATION	ENR 1.4 - 1
1.	Classification of ATS airspace in Budapest FIR are as follow:	ENR 1.4 - 1
ENR 1.5	HOLDING, APPROACH AND DEPARTURE PROCEDURES	ENR 1.5 - 1
1.	General	ENR 1.5 - 1
2.	Approach Procedures	ENR 1.5 - 1
3.	Departure Procedures	ENR 1.5 - 1
ENR 1.6	RADAR SERVICES AND PROCEDURES	ENR 1.6 - 1
1.	OPERATION (PSR/SSR)	ENR 1.6 - 1
2.	Secondary Surveillance Radar (SSR)	ENR 1.6 - 3
ENR 1.7	ALTIMETER SETTING PROCEDURES	ENR 1.7 - 1
1.	Introduction	ENR 1.7 - 1
2.	Basic altimeter setting procedures	ENR 1.7 - 1
3.	Table of cruising levels	ENR 1.7 - 3
ENR 1.8	REGIONAL SUPPLEMENTARY PROCEDURES (DOC7030)	ENR 1.8 - 1
ENR 1.9	AIR TRAFFIC FLOW MANAGEMENT SERVICE (ATFM)	ENR 1.9 - 1
1.	General	ENR 1.9 - 1
2.	Responsibilities	ENR 1.9 - 1
3.	Information on Air Traffic Flow Management (ATFM) measures	ENR 1.9 - 2
4.	ATFM procedures	ENR 1.9 - 2
5.	Operational data	ENR 1.9 - 4
ENR 1.10	FLIGHT PLANNING	ENR 1.10 - 1
1.	Procedures for the Submission of a Flight Plan	ENR 1.10 - 1
2.	Repetitive Flight Plan	ENR 1.10 - 6
ENR 1.11	ADDRESSING OF FLIGHT PLANS AND RELATED MESSAGES	ENR 1.11 - 1
ENR 1.12	INTERCEPTION OF CIVIL AIRCRAFT	ENR 1.12 - 1
1.	Interception Procedures	ENR 1.12 - 1
2.	Signals for use in the event of interception	ENR 1.12 - 3
3.	Marking applied on Hungarian state aircraft	ENR 1.12 - 5
ENR 1.13	UNLAWFUL INTERFERENCE	ENR 1.13 - 1
1.	General	ENR 1.13 - 1
2.	Procedures	ENR 1.13 - 1
ENR 1.14	AIR TRAFFIC INCIDENTS	ENR 1.14 - 1
1.	The Air Traffic Incident	ENR 1.14 - 1
2.	Use of the "Air Traffic Incident Report Form"	ENR 1.14 - 1
3.	Reporting of Air Traffic Incident by pilot	ENR 1.14 - 1
4.	Handling of Air Traffic Incident Report Form	ENR 1.14 - 2

ENR 2 AIR TRAFFIC SERVICES AIRSPACE

ENR 2.1	FIR, CTA, TMA, MTMA, MCTR.....	ENR 2.1 - 1
1.	FIR, CTA, TMA.....	ENR 2.1 - 1
2.	Military TMAs AND CTRs (MTMA/MCTR).....	ENR 2.1 - 3
ENR 2.2	OTHER REGULATED AIRSPACE.....	ENR 2.2 - 1

ENR 3 ATS ROUTES

ENR 3.1	LOWER ATS ROTES.....	ENR 3.1 - 1
ENR 3.2	UPPER ATS ROUTES.....	ENR 3.2 - 1
ENR 3.3	AREA NAVIGATION (RNAV) ROUTES.....	ENR 3.3 - 1
ENR 3.4	HELICOPTER ROUTES.....	ENR 3.4 - 1
ENR 3.5	OTHER ROUTES.....	ENR 3.5 - 1
ENR 3.6	EN-ROUTE HOLDING.....	ENR 3.6 - 1
1.	Holding procedures within Budapest TMA.....	ENR 3.6 - 1

ENR 4 RADIO NAVIGATION AIDS/SYSTEMS

ENR 4.1	RADIO NAVIGATION AIDS - EN-ROUTE.....	ENR 4.1 - 1
ENR 4.2	SPECIAL NAVIGATION SYSTEMS.....	ENR 4.2 - 1
ENR 4.3	GLOBAL NAVIGATION SATELITE SYSTEM (GNSS).....	ENR 4.3 - 1
ENR 4.4	NAME-CODE DESIGNATORS FOR SIGNIFICANT POINTS.....	ENR 4.4 - 1
ENR 4.4-1	NAME-CODE DESIGNATORS FOR FRA SIGNIFICANT POINTS.....	ENR 4.4-1 - 1
ENR 4.5	AERONAUTICAL GROUND LIGHTS - EN-ROUTE.....	ENR 4.5 - 1

ENR 5 NAVIGATION WARNINGS

ENR 5.1	PROHIBITED, RESTRICTED AND DANGER AREAS.....	ENR 5.1 - 1
1.	Prohibited Areas.....	ENR 5.1 - 1
2.	Restricted Areas.....	ENR 5.1 - 1
3.	Danger Areas.....	ENR 5.1 - 3
ENR 5.2	MILITARY EXERCISES AND TRAINING AREAS AND AIR DEFENSE IDENTIFICATION ZONE.....	ENR 5.2 - 1
1.	Temporary Restricted Areas.....	ENR 5.2 - 1
2.	Air defense identification zone.....	ENR 5.2 - 4
ENR 5.3	OTHER ACTIVITIES OR DANGEROUS NATURE AND OTHER POTENTIAL HAZARDS.....	ENR 5.3 - 1
ENR 5.4	AIR NAVIGATION OBSTACLES - EN-ROUTE.....	ENR 5.4 - 1
ENR 5.5	AERIAL SPORTING AND RECREATIONAL ACTIVITIES.....	ENR 5.5 - 1
1.	Aerobatics area.....	ENR 5.5 - 1
2.	Glider areas.....	ENR 5.5 - 1
3.	Drop zones.....	ENR 5.5 - 3
ENR 5.6	BIRD MIGRATION AND AREAS WITH SENSITIVE FAUNA.....	ENR 5.6 - 1
ENR 6	EN-ROUTE CHARTS.....	ENR 6 - 1
	ENROUTE CHART - ICAO.....	ENR 6-LHCC-ERC - 1
	APPENDIX 1 TO EN-ROUTE CHART - ICAO.....	ENR 6-LHCC-ERC-MISC1 - 1
	APPENDIX 2 TO EN-ROUTE CHART - ICAO.....	ENR 6-LHCC-ERC-MISC2 - 1
	APPENDIX 3 TO EN-ROUTE CHART - ICAO.....	ENR 6-LHCC-ERC-MISC3 - 1
	PROHIBITED, RESTRICTED AND DANGER AREAS.....	ENR 6-LHCC-PRD - 1
	MILITARY EXERCISE AREAS.....	ENR 6-LHCC-TRA - 1

ENR 1.2 VISUAL FLIGHT RULES**1. GENERAL RULES**

- 1.1. Except when operating as a special VFR flight, VFR flights shall be conducted so that the aircraft is flown in , equal to or greater than those specified in the table below:

Table 1: Conditions of visibility and distance from clouds

Altitude band	Airspace class:	Flight visibility:	Distance from cloud:
At and above FL100 (3050 m STD)	C, D	8 km	1500 m horizontally 1000 feet (300 m) vertically
Between FL100 (3050 m STD) and 3000 feet (900 m) AMSL, or 1000 feet (300 m) above terrain, whichever is the higher	C, D, F, G	5 km	
At and below 3000 feet (900 m) AMSL, or 1000 feet (300 m) above terrain, whichever is the higher	C, D	5 km	1500 m horizontally 1000 feet (300 m) vertically and with the surface in sight
	F, G	5 km*	Clear of cloud and with the surface in sight

- a. *flight visibilities reduced to not less than 1500 m are permitted for flights operating
- at speeds that, in the prevailing visibility, will give adequate opportunity to observe other traffic or any obstacles in time to avoid collision; or
 - at or below 50 m above terrain for aerial work;
- b. flight visibilities reduced to not less than 750 m are permitted for flights operating:
- helicopters, if manoeuvred at a speed that will give adequate opportunity to observe other traffic or any obstacles in time to avoid collision; and
 - balloons.
- 1.2. Except when a clearance is obtained from an air traffic control unit, VFR flights shall not take-off or land at an aerodrome within a control zone, or enter the aerodrome traffic zone or traffic pattern:
- a. when the ceiling is less than 1500 ft (450 m); or
- b. when the ground visibility is less than 5 km
- 1.3. VFR flights between sunset and sunrise:
- a. aircraft shall be equipped according to ICAO Annex 6, Part II., Chapter 6 para 6.7.
- b. the operator shall establish operating weather minima with due regard to the conditions set for airspace type C, D in the *Table 1* . For airspace type F and G the flight visibility 5 km for fixed wing aircraft and 3 km for helicopters and with the surface in sight continuously.

2. RESTRICTIONS FOR VFR FLIGHTS

- 2.1. VFR flights shall not be conducted above FL285 (8700 m STD).
- 2.2. Enroute VFR flights shall not be conducted above FL195 (5950 m STD).
- 2.3. VFR flights between FL195 (5950 m STD) and FL285 (8700 m STD) may be conducted only:
- in ad-hoc segregated airspace, or
 - according to the prior permission given by Budapest ATS Centre.

Note1: Application of ad-hoc segregated airspace shall be submitted to the Military Aviation Authority, not later than 10 working days prior to the date of operation (see page GEN 1.1-1, para 1.3)

Note2: In case of VFR flight planned above FL195 (5950 m STD), not in an ad-hoc segregated airspace, prior to submission of the flight plan, but in any case not later than 30 minutes prior to EOBT, the pilot shall

obtain prior permission from the duty supervisor of Budapest ATCC by phone on 291 6252.

Except in emergency or when cleared by the appropriate ACC sector controller otherwise, VFR flights above FL195 shall be conducted within the geographical area and up to the flight altitude defined by Budapest ATCC.

In case a VFR flight operating above FL195 (5950 m STD) if the radio contact with the appropriate ATC unit is lost, and to re-establish the two way radio communication with the appropriate or adjacent ATC unit is unsuccessful, the aircraft experiencing communication failure, shall descend immediately and leave the controlled airspace, within the area defined in the ATC clearance. Then land at the first suitable aerodrome and report the landing as soon as possible to the appropriate ATC unit.

In case when a VFR flight operating above FL 195 (5950 m STD) within controlled airspace and because of deterioration of meteorological conditions unable to operate in VMC:

- a. request an amended clearance, which permits to continue the operation in VMC to the destination or to an alternate aerodrome, or to leave the controlled airspace, or
- b. when the clearance in a) above may not be obtained, operate in VMC and report to the appropriate ATC unit the action for leaving the area concerned or for landing at the first suitable aerodrome.

The State boundaries of Hungary may be crossed over any significant points designated as Budapest FIR entry/exit points. The designed points are listed in part *ENR 4.4*.

- 2.4. VFR operation below FL100 (3050 m STD) with speed more than 250 kt (460 km/h) IAS is prohibited.
- 2.5. Except take-off and landing, aerial work and state aircraft special task operations, VFR flights shall not be flown:
 - a. over the congested areas of cities, towns or settlements or over an open-air assembly of persons at a height less than 1000 ft (300 m) above the highest obstacle within a radius of 600 m from the aircraft;
 - b. elsewhere than as specified in 5 a), at a height less than 500 ft (150 m) above the ground or water; except flights with special clearances, balloon and hang glider flights
- 2.6. VFR flights in level cruising flight when operated above 3500 ft (1050 m) MSL shall be conducted at a level appropriate to the track specified in the table of cruising levels (*ENR 1.7 para 3.*).
- 2.7. In the controlled airspace of Budapest FIR operation on non powered aircraft shall be subject to prior permission issued by the appropriate ATC unit concerned.
- 2.8. All VFR flights with FPL and radio equipped, shall maintain continuous listening watch on the appropriate radio frequency of, and report their position as necessary to the air traffic services unit providing flight information service.
- 2.9. VFR flights entering Budapest FIR shall establish radio contact - at least 10 minutes prior to the actual crossing of the FIR boundary - with the appropriate Sector of Budapest ACC/FIC and shall report the following flight plan data:
 - a. aircraft identification;
 - b. type;
 - c. VFR;
 - d. destination;
 - e. ETO FIR boundary
 - f. cruising level/altitude.

If radio contact as required above cannot be established, the ATS unit in charge of the area from which the aircraft is to enter Budapest FIR shall be requested to relay the prescribed data to Budapest ACC/FIC and obtain entry clearance.

Without previous entry clearance a VFR flight shall not enter Budapest FIR.

An exception to this the aircraft which has experienced communication failure, but had already reported the required FPL data to the ATS unit providing FIS in the area from which the aircraft is to enter Budapest FIR.

All international VFR flight shall operate SSR transponder according to *ENR 1.6 para 2*.

The State boundaries of Hungary may be crossed over any significant points designated as the ATS route

network entry/exit points. The designed points are listed in part ENR 3. ATS routes and are shown on Aeronautical Chart Hungary - ICAO 1:500000.

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 1.3 INSTRUMENT FLIGHT RULES

1. RULES APPLICABLE TO ALL IFR FLIGHTS**1.1 Aircraft equipment**

Commercial air transport aircraft operating in the airspace of Hungary have to adhere to the provisions of ICAO Annex 6 - Operation of Aircraft - Part 1, Chapter 6 - Aeroplane Instruments, Equipment and Flight Documents - and Chapter 7 - aeroplane Communication and Navigation Equipment.

Aircraft, other than state aircraft, operating within Budapest FIR under instrument flight rules (IFR) above 9500 FT ALT shall be equipped with, as a minimum, RNAV equipment meeting RNAV 5 in accordance with the requirements set out in of ICAO Doc 7030/5 Regional Supplementary Procedures (EUR).

Acceptable means of compliance are set out in the JAA Technical Guidance Leaflet No. 2 rev. 1.

1.2 B-RNAV Contingency Procedures

For B-RNAV equipped aircraft experiencing temporary failure or degradation of the RNAV system below RNP 5, the following procedures apply:

- a. Correct operation of the aircraft RNAV system below RNP 5, the following procedures apply:
 - the routing is in accordance with the clearance; and
 - the aircraft navigation accuracy meets RNP 5
- b. If as a result of a failure or degradation of the RNAV system below RNAV5 an aircraft is unable either to enter the airspace designated in ICAO DOC 7030/5, EUR Regional Supplementary Procedures, or continue operations in accordance with the current air traffic control clearance, a revised clearance shall, whenever possible, be obtained by the pilot.
- c. Subsequent air traffic control action in respect of that aircraft will be dependent upon the nature of the reported failure and the overall traffic situation. Continued operation in accordance with the current ATC clearance may be possible in many situations. When this cannot be achieved, a revised clearance may be required to revert to VOR/DME navigation. ATC may also provide the aircraft with radar vectors until the aircraft is capable of resuming its own navigation.
- d. In case of a failure or degradation of the RNAV system below RNAV 5, which is detected before departure from an aerodrome where it is not practicable to effect a repair, the aircraft concerned should be permitted to proceed, as directly as possible, to the nearest suitable aerodrome where repair can be made. When granting clearance to such aircraft, ATC should take into consideration, the existing or anticipated traffic situation and may have to modify the time of departure, flight level or route of the intended flight. Subsequent adjustments may become necessary during the course of flight. Operators of such aircraft, where a failure or degradation is detected before departure, shall not insert designators „S” ore” in Item 10 of the flight plan. Since such flights require special handling by air traffic control, Item 18 of the flight plan shall contain STS/RNAV INOP.
- e. For such aircraft experiencing a failure or degradation of RNAV system below RNAV 5, the following ATC procedures are applicable:
 - In case of automated messages not containing the information provided in Item 18 of the flight plan, the sending air traffic control unit shall inform the receiving air traffic control unit supplementing the ATC message verbally with the phrase „RNAV UNSERVICABLE” after the call sign of the aircraft concerned.
 - When a verbal co-ordination process is being used, the sending air traffic control unit shall include the phrase „RNAV UNSERVICABLE” at the end of the message.
 - The phrase „UNABLE RNAV DUE EQUIPMENT” shall be included by the pilot immediately following the aircraft call sign, whenever initial contact on air traffic control frequency is established.

1.3 Minimum flight altitudes

The minimum flight altitudes are depicted on chart *ENR 6-LHCC-ERC* have been determined so as to ensure

at least 1000 feet vertical clearance above the highest obstacle.

Except when necessary for take-off or landing an IFR flight shall not be flown lower than:

- over high terrain or in mountainous areas at a level which is at least 2000 FT (600 m) above
- elsewhere (over a flat terrain) at a level which is at least 1000 FT (300 m)

above the highest obstacle located within 8 km of the estimated position of the aircraft or at the minimum safe sector altitude (MSA) established for the area concerned.

When determining the flight altitude the navigational accuracy which can be achieved on the relevant route segment shall be taken into account, having due regard to the navigational facilities available on the ground and on board of the aircraft.

1.4 Change from IFR flight to VFR flight

An aircraft electing to change the conduct of its flight from compliance with the instrument flight rules to compliance with the visual flight rules shall notify the appropriate ATS unit that the IFR flight plan is cancelled.

1.5 RVSM operation

As specified in the ICAO EUR Regional Supplementary Procedures (Doc 7030/4 - EUR), Chapter 1, paragraph 1.1.1.2, flights shall be conducted in accordance with Instrument Flight Rules when operated within or above the EUR RVSM airspace.

Therefore, flights operating as General Air Traffic (GAT) within Budapest FIR at or above FL 290, as described in *ENR 2.1*, shall be conducted in accordance with the Instrument Flight Rules.

2. RULES APPLICABLE TO IFR FLIGHT WITHIN CONTROLLED AIRSPACE

- IFR flights shall comply with the provisions of para 3.6 of ICAO Annex 2, when operated in controlled airspace.
- An IFR flight operating in a controlled airspace shall be flown at a cruising level selected from the tables of cruising levels shown in *ENR 1.7 para 3*, according to its planned track, except as otherwise instructed by ATC.

3. RULES APPLICABLE TO IFR FLIGHTS OUTSIDE CONTROLLED AIRSPACE

3.1 Cruising levels

Flight departing from non-controlled aerodromes for en-route flights may start operation only on possession of a filed flight plan, except when a special airspace portion has been approved for the individual flight.

During the en-route portion of the flight the cruising levels selected as prescribed in para 2 above shall be maintained.

Outside controlled airspace and TRA IFR flights shall not be conducted at an indicated airspeed (IAS) exceeding 250 KTS (460 km/h).

3.2 Communications

All IFR flights leaving the CTR or TIZ shall maintain a continuous listening watch and establish two-way radio communications on the appropriate radio frequency of the Flight Information Centre (FIC).

Identically also the VFR flights operating enroute above 4000 FT shall maintain continuous listening watch on the appropriate radio frequency of the FIC.

3.3 Position reports

Aircraft shall make position reports at designated reporting point (if any) and at other occasions as instructed by FIC, but at least every 15 minutes.

Irrespective of the applicable rules the FIC shall be notified:

- if an aircraft is compelled to divert from its flight plan route more than 5 km;
- if an estimated time over the FIR boundary is different with + 5 minutes from the one communicated to FIC earlier;
- if intends to change from IFR to VFR or vice versa;

- if departing from a non AFIS aerodrome;
- of an approach to land outside an aerodrome.

4. FREE ROUTE AIRSPACE GENERAL PROCEDURES

4.1 Area of application

4.1.1 HUFRA is available H24 from the ground level to FL 660 in the airspace encompassed by the lateral limits of Budapest FIR (LHCC FIR) including the areas where responsibility for provision of ATS have been delegated for Budapest ACC.

4.2 Flight Procedures

4.2.1 General

4.2.1.1 Within HUFRA, aircraft other than State aircraft, shall comply with the aircraft equipment requirements published in *GEN 1.5*

4.2.1.2 Within HUFRA airspace, users will be able to plan user-preferred trajectories using significant points - five-letter name-codes - and/or en-route radio navigation aids published in *ENR 4.4* and *ENR 4.1*, respectively. Segments between the significant points shall be defined by means of DCT (Direct) instructions.

4.2.1.3 Within HUFRA, significant points are considered as FRA entry, FRA exit, FRA intermediate, FRA arrival and FRA departure points, as described in *ENR 4.4*. All en-route radio navigation aids published in *ENR 4.1* are considered as FRA intermediate points.

4.2.1.4 Within HUFRA, there is no restriction on the maximum DCT distance.

4.2.2 Overflying traffic

4.2.2.1 Overflight traffic shall be planned directly between FRA entry, FRA exit and FRA intermediate points.

4.2.2.2 An exception to the rule is made during the initial HUFRA implementation phase when the DCT segments which are not available are announced in accordance with paragraph 4.5 below.

4.2.2.3 Traffic proceeding inbound or outbound airports located in close vicinity of LHCC FIR shall be planned in accordance with 4.2.2.1 above and paragraph 4.4 below also using the relevant FRA arrival and FRA departure points. Airports in close vicinity of LHCC FIR are considered to be: LOWW and LZIB.

4.2.3 Access to/from airports and terminal airspace

4.2.3.1 Flights arriving at or departing from airports located within LHCC FIR are eligible for free route operations and shall be planned in accordance with the paragraphs below.

4.2.3.2 In case of departing flight from an airport where standard instrument departures procedures (SIDs) are published, RNAV-capable departing flights shall be planned directly from the SID final waypoint to the HUFRA exit point.

4.2.3.3 In case of arriving flight to an airport where standard instrument arrival procedures (STARs), or transition procedures are published, RNAV-capable arriving flights shall be planned directly from the HUFRA entry point to the STAR initial waypoint or transition procedure.

4.2.3.4 The SID/STAR or transition procedures shall not be indicated in the filed route of the FPLs.

4.2.3.5 Where SIDs are not published, the flights shall be planned DCT to the HUFRA exit point.

4.2.3.6 Where STARs are not published, the flights shall be planned DCT from the HUFRA entry point to the airport.

4.2.4 Cross-Border Applications

4.2.4.1 The planning of DCT segments across the HUFRA borders (cross border DCT) is not allowed. Entry and exit from HUFRA shall be planned using the published FRA entry and FRA exit points only.

4.2.4.2 The planning of DCT segments that are partially outside the lateral limits of HUFRA (multiple re-entry segments) is not allowed.

4.2.4.3 The planning of DCT segments closer than 3 NM to the HUFRA border is not allowed.

4.3 Airspace Reservation - Special Areas

4.3.1 Re-routing Special Areas

4.3.1.1 Flights may be planned through active TRAs or danger areas.

4.3.2 Promulgation of route extension

4.3.2.1 In the case where there is no availability to cross the active reserved area, occasionally:

- a. a flight may be instructed to proceed to one of the five significant points which are published in ENR 4.4 as an intermediate point, with the remark "in case TRA 32/33 active";
- b. tactical radar vectoring may be applied in order to ensure an additional safety margin between active TRA boundaries and flight trajectories. It is expected that the average extension to be considered by aircraft operators will be approximately 5 NM and in exceptional circumstances, not more than 10 NM.

4.3.2.2 Restrictions on the maximum DCT distance inserted in the flight plan will not be enforced.

4.4 Flight Planning (Item 15)

4.4.1 General

4.4.1.1 In case of more than 30 minutes of flying time or 200 NM (370 KM), an intermediate point may be inserted at which a change of speed, flight level, track, or flight rules are planned. There is no restriction on the number of intermediate points that may be used.

4.4.1.2 The use of a point entered in latitude and longitude for a change of speed or flight level shall be avoided.

4.4.2 ATS Route Network

4.4.2.1 The ATS route network within LHCC FIR will be withdrawn.

4.4.2.2 Within HUFRA no reference shall be made in the flight plan to ATS routes.

4.4.3 Flight Level Orientation Scheme

4.4.3.1 Cruising levels must be planned in accordance with the information provided in the column "Remarks/Usage" in ENR 4.4. The direction of cruising levels (EVEN or ODD) must be chosen depending on the direction of the flight level required over the FRA entry and FRA exit points as described in the following table:

Direction of Cruising levels within HUFRA		
FLs over FRA entry point	FLs over FRA exit point	FLs inside HUFRA
EVEN	EVEN	FLs for all DCT segments
ODD	ODD	FLs for all DCT segments
EVEN	ODD	A change from EVEN to ODD FLs must be planned inside HUFRA
ODD	EVEN	A change from ODD to EVEN FLs must be planned inside HUFRA

Note: ODD is the direction of IFR cruising levels with a magnetic track between 000° and 179° while EVEN is the direction of IFR cruising levels with a magnetic track between 180° and 359°, as described in the table of cruising levels in ENR 1.7.

AIP HUNGARY

4.4.3.2 Cruising levels must also be planned in accordance with the adjacent ATS route network Flight Level Orientation Scheme.

4.4.4 Flight Planning procedures for departing and arriving flights from/to significant airports

4.4.4.1 Flight Planning of any departing flights from LHBP shall comply with the following procedures:

Airport	SID End Point	HUFRA Mandatory Intermediate Point	HUFRA (X) Exit Point	Flight Plan (Item 15)	Remark
LHBP	NALAG	RIGSA	KEKED, LONLA, GEMTO, KARIL, BADOR	NALAG DCT RIGSA DCT (X)	
	NORAH		NARKA, BUDOP	NORAH DCT (X)	
	ERLOS	MAVIR	TEGRI, MOPUG, INVED	ERLOS DCT MAVIR DCT (X)	
			KEROP	ERLOS DCT MAVIR DCT KEROP	Below FL135
	PUSTA		KEROP, VEBAL, KOPRY, DIMLO, GOTAR	PUSTA DCT (X)	
	GILEP		SUNIS, ARSIN, ABETI, BEGLA	GILEP DCT (X)	
	TORNO		NATEX	TORNO DCT NATEX	Only for city pair LHBP - LOWW
TORNO		XOMBA	TORNO DCT XOMBA	Only for city pair LHBP - LZIB	

4.4.4.2 Flight Planning of any arriving flights to LHBP shall comply with the following procedures:

HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	Transition Initial Point	Airport	Flight Plan (Item 15)	Remark
KEKED, LONLA, GEMTO, KARIL	RIGSA - GELKA	JBR	LHBP	(E) DCT RIGSA DCT GELKA DCT JBR	
DEMOP		JBR		DEMOP DCT JBR	
NARKA, MEGIK, BUDOP, DEGET, MOPUG, PARAK		ABONY		(E) DCT ABONY	
VEBAL, KOPRY, DIMLO, GOTAR		VEBOS		(E) DCT VEBOS	
STEIN					STEIN not available for ARR LHBP

4.4.5 Flights arriving at or departing from airports located in close vicinity of LHCC FIR

4.4.5.1 Flight Planning of any departing flight shall comply with the following procedures:

Airport	HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	HUFRA (X) Exit Point	Flight Plan (Item 15)	Remark
LOWW	ALAMU	EPARI	KEKED, LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI	ALAMU DCT EPARI DCT (X)	
	STEIN	SIRDU	KEKED, LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI	STEIN DCT SIRDU DCT (X)	
	SASAL		INVED, BABIT, VEBAL, KOPRY	SASAL DCT (X)	
LZIB	VAMOG	SIRDU	VEBAL, KOPRY, DIMLO, GOTAR	VAMOG DCT SIRDU DCT (X)	
	VAMOG	GITAS	KEKED, LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI, MOPUG, INVED, KEROP, BABIT	VAMOG DCT GITAS DCT (X)	
	ERGOM		LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI	ERGOM DCT (X)	

AIP HUNGARY

4.4.5.2 Flight Planning of any arriving flight shall comply with the following procedures:

HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	Transition Initial Point	Airport	Flight Plan (Item 15)	Remark
KEKED (and for DEP LHBP via TORNO SID)	TORNO	NATEX	LOWW	(E) DCT TORNO DCT NATEX	
LONLA, GEMTO, KARIL, NARKA, MEGIK, BUDOP, DEGET, MOPUG, PARAK	BALUX	NATEX		(E) DCT BALUX DCT NATEX	
KEKED, LONLA, GEMTO, KARIL, NARKA, MEGIK, BUDOP, DEGET, MOPUG, PARAK	BALUX	XOMBA	LZIB	(E) DCT BALUX DCT XOMBA	
TONDO, VEBAL, KOPRY, DIMLO		XOMBA		(E) DCT XOMBA	

4.4.5.3 The other flights arriving at or departing from other airports located in close vicinity of LHCC FIR are considered as overflying traffic (see para 4.2.2.3 above).

4.5 Route Availability Document

4.5.1 All HUFRA constrains, exceptions and restrictions, if any will be published via the RAD and promulgated in accordance with *ENR 1.10*.

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 1.6 RADAR SERVICES AND PROCEDURES

1. OPERATION (PSR/SSR)**1.1 Supplementary services****1.1.1 Radar service is an integral part of the ATC system within Budapest FIR.**

Budapest ACC and Budapest TRCC will normally use radar derived information in the provision of air traffic control services.

1.1.2 Within Budapest FIR radar service is provided by:

- a. BUDAPEST CONTROL for aircraft operating under Area Control;
- b. BUDAPEST APPROACH for aircraft operating within Budapest TMA;
- c. BUDAPEST DIRECTOR for arriving aircraft in Budapest TMA below 7500 feet altitude (as traffic conditions require).
- d. BUDAPEST FLIGHT INFORMATION may use radar derived information in the provision for flight information service between 4000 feet and 9500 feet altitude. Radar serves only as an aid to provide aircraft with more accurate flight information. It does not relieve the pilot-in-command of an aircraft of any of his responsibilities and he has to make the final decision regarding any suggested alternation of flight plan.

For more details See ENR 2.1

1.1.3 Communication

The following R/T procedures shall be applied by aircraft operating under radar control within Budapest FIR

- a. The initial call after a change of radio frequency shall contain only:
 - aircraft call sign;
 - actual level (with the addition of cleared level for climbing or descending aircraft).
- b. Any position report (if required) subsequently shall contain only:
 - aircraft call sign;
 - position;
 - time over (fix)
- c. Aircraft being identified after entering controlled airspace are exempted the requirement of subsequent position reporting. Pilots of aircraft shall resume position reporting when:
 - it is instructed by ATC; or
 - crossing the FIR boundary; or
 - are advised that radar service terminated or radar contact lost.

Note: The requirement to report receipt of ATIS broadcast at first contact on 129,700 MHz (APP) when entering Budapest TMA and on 134,550 MHz (Budapest Delivery) before starting up engines by reading back the relevant designator of information and actual QNH is not affected by the above procedure.

1.2 Application of radar control service

1.2.1 Radar control service is applied in accordance with the provisions of ICAO Doc 4444 - ATM/501 Chapter 8. ATS Surveillance Services.

1.2.2 Radar control service is provided in controlled airspace to aircraft operating within Budapest TMA and Budapest CTA.

1.2.3 Radar identification is achieved according to the provisions specified by ICAO, using the phrase: "IDENTIFIED" or "RADAR CONTACT" which may be followed by any instruction as necessary.

1.2.4 The applicable horizontal radar separation minima:

- Budapest CTA (Budapest ACC): 5NM
- Budapest TMA (Budapest TRCC): 3NM

1.2.5 Dependent parallel approach procedures are applied at Budapest Liszt Ferenc International Airport.

1.2.6 Levels assigned by radar controller to pilots will provide a minimum terrain clearance according to the phase of flight.

1.3 Radar and radio failure procedures

1.3.1 Radar failure

In the event of radar failure or loss of radar identity of an aircraft under radar control will be advised immediately of the interruption or termination of radar control and as an emergency measure reduced vertical separation (500 feet at/or below FL410 and 1000 feet above FL410) may be resorted to as necessary until standard non-radar separation can be provided or radar control is resumed.

1.3.2 Radio communication failure

In the case of complete aircraft communication failure the pilot shall carry out the procedures detailed in PANS ATM (ICAO Doc 4444) Chapter 15, paragraph 15.3.

1.4 Radar coverage

a. Budapest ACC

Radar data from 2 radar stations which are equipped with both primary and secondary radars will be used.

Position in WGS-84		Püspökladány (Budapest - East Radar) 472122.90N 0210239.06E	Kőrishegy (Budapest - West Radar) 471738.96N 0174512.89E
Range	RSR	160NM	160NM
	SSR	200NM	200NM

b. Budapest TRCC

A TAR station of Budapest Liszt Ferenc International Airport is equipped with both primary and secondary radars.

Position in WGS-84		Budapest Liszt Ferenc International Airport (Budapest - Terminal Area Surveillance Radar) TAR1 - 472650.8091N 0191546.6990E TAR2 - 472517.4060N 0191812.3400E
Range	TAR	60NM
	SSR	150NM

ENR 1.7 ALTIMETER SETTING PROCEDURES

1. INTRODUCTION

The altimeter Setting procedures in use generally conform to those contained in ICAO Doc 8168 OPS/611 Aircraft Operation Vol. I. Part 6 and are given in full below. Differences are shown *in italics*.

These procedures are applied to all IFR and VFR flights operating within Budapest FIR.

The atmospheric pressure is measured in accordance with ICAO Annex 3 Chapter 4, paragraph 4.11.

QNH and QFE values are computed in tenth of hectopascal. On pilots' request it may be given in millimetres and tenths.

In routine reports disseminated at the aerodrome QNH is included regularly while QFE is available on request from air traffic service units.

The values are rounded to the nearest lower whole hectoPascal. For example QNH 995,6 hPa is given as: "QNH 995".

In plain language reports (ATIS and VOLMET) broadcast) the unit of measurement (hPa) is omitted.

2. BASIC ALTIMETER SETTING PROCEDURES**2.1 General****2.1.1 System of flight levels**

- a. Flight level zero is located at the atmospheric pressure level of 1013.2 hPa. Consecutive flight levels are separated by a pressure interval corresponding to at least 1000 feet (3050 m) in the Standard Atmosphere.
- b. Flight levels are numbered according to the following table, which indicates the corresponding height in the Standard Atmosphere in feet and the approximate equivalent height in meters.

Flight Level Number	Height in the Standard Atmosphere	
	Feet	Meters
100	10000	3050
150	15000	4550
200	20000	6100
660	66000	20100

2.1.2 Transition altitude

The transition altitude specified for Budapest FIR is 9000 feet.

2.1.3 Transition level

The transition level will be determined by the appropriate ATC unit so as to give a transition layer of at least 1000 feet (305 m) vertical separation above the transition altitude.

For determination of current transition level the following table is used.

Transition altitude		QNH hPa	Transition level
Feet	Meters		
9000	2750	1013,3 and above	FL100
		1013,2 - 977,2	FL110
		977,1 and below	FL120

The transition level at Budapest Liszt Ferenc International Airport is transmitted normally in ATIS broadcast,

or is involved in the clearances as appropriate.

2.1.4 Transition from flights to altitudes and vice versa

The vertical position of aircraft when at or below the transition altitude shall be expressed in terms of altitude, whereas such position at or above the transition level shall be expressed in terms of flight levels. While passing through the transition layer, vertical position shall be expressed in terms of flight levels in climb and in terms of altitude when descending.

2.2 Take-off and climb

The QNH value for altimeter setting is transmitted normally in the ATIS broadcast, or is involved in start up clearance as appropriate.

2.3 Vertical separation - enroute

2.3.1 Vertical position

- a. Vertical positioning of aircraft during the enroute phase of flight at and below the transition altitude shall be assessed in terms of altitudes.
- b. Vertical position of aircraft during the enroute phase of flight at or above the transition level shall be assessed in terms of flight levels.
- c. In air-ground communication the vertical position of an aircraft during enroute flight shall be expressed according to the altimeter setting applied to conform the provisions of paragraphs above, as appropriate.

2.3.2 Terrain clearance

- a. QNH altimeter setting and temperature information are included in routine reports for use in determining adequate terrain clearance. These data are transmitted normally in ATIS and VOLMET broadcasts and are also available on request from ATIS units.
- b. Normally the QNH value determined for Budapest Liszt Ferenc International Airport is used as "regional QNH" within Budapest FIR.
- c. ATC units determine the lowest usable flight levels for the whole part of the control area for which they are responsible, and use it when assigning flight levels and pass it to pilots on request.

Note: The objectives of the air traffic control services as prescribed in Annex 11 do not include prevention of collision with terrain. The procedures prescribed above do not therefore relieve the pilots' responsibility of ensuring that any clearances issued by ATC units are safe in this respect, except when an IFR flight is vectored by radar.

- d. When vectoring an IFR flight, the radar controller shall ensure the adequate terrain clearance at all times until the aircraft reaches the point where the pilot will resume own navigation.

2.4 Approach and landing

2.4.1 A QNH value is transmitted normally in the ATIS broadcast and/or is involved in approach clearances and/or in clearances to enter the traffic circuit, as appropriate.

2.4.2 A QFE value - clearly identified as such - is available on pilots' request in approach and landing clearances.

The QFE value given in clearances of ATC units shall be related to the threshold elevation of the runway in use.

E.g.: QUEBEC - FOXTROT - ECHO FOR RUNWAY THREE - ONE - RIGHT IS NINER - NINER - TWO

2.4.3 Vertical positioning of aircraft during descent is controlled by reference to FLIGHT LEVELS until reaching the Transition Level, below which vertical positioning is controlled by reference to Altitudes.

Note: This does not preclude the use of QFE altimeter setting by a pilot for terrain clearance purposes during the final approach.

2.5 Missed approach

2.5.1 During the missed approach phase of the instrument approach procedure the vertical position of the aircraft is controlled by reference to Altitudes, unless otherwise instructed by the ATC unit.

ENR 1.8 REGIONAL SUPPLEMENTARY PROCEDURES (DOC7030)

EUR Regional Supplementary Procedures are applied. *Differences* are shown below:

1. **Chapter 2.**
Reduced Vertical Separation Minimum (RVSM) of 300 m (1000 FT)

The airspace within Budapest FIR between FL 290 and FL 410 inclusive, as described in ENR 2.1, is EUR RVSM airspace.

2. **Chapter 3. paragraph 3.1**
Air-Ground Communications and In-Flight Reporting

All aircraft operating above *9500 FT AMSL* in Budapest FIR shall be equipped with 8.33 KHZ channel spacing capable radio equipment.

Temporary exemption is granted for State aircraft to operate 8.33 kHz channel spacing radio equipment in Budapest FIR on condition that such flight establish and maintain two way radio communication contact with the appropriate ATS Unit (Sector) on UHF frequency - in the band 225,000 - 400,000 MHZ –as instructed by ATC.

The UHF coverage extends to the airspace above FL 100 within Budapest FIR.

More exemptions (ref. item 18 of the flight plan):

- STS/SAR
- STS/HOSP
- STS/FFR
- STS/MEDEVAC.

3. **Chapter 11.**

Flight Information Service

11.2. Transmission of SIGMET information

11.2.1. SIGMET information passed to aircraft cover *Budapest FIR only*.

11.4. Transmission of amended aerodrome forecast

11.4.1. Amended aerodrome forecasts will be passed to aircraft *only on pilots' request*.

THIS PAGE INTENTIONALLY LEFT BLANK

aerodrome to other addressees, it is the flight plan originator's responsibility to add the special addresses.

1.4.2 AFTN addressing of Flight Plans and associated messages

See ENR 1.11

1.4.3 Adherence to Airspace Utilization Rules and Availability

No flight plans shall be filed via the airspace of Budapest FIR deviating from the State restrictions defined within the Route Availability Document (RAD). This common European reference document contains all airspace utilisation rules and availability for Budapest FIR and any reference to them shall be made via

URL:<https://www.nm.eurocontrol.int/RAD/index.html>.

1.5 Submission of a Flight Plan

1.5.1 Direct filing of Flight Plans to the IFPS

All foreign aircraft operators (AOs), and those national air carriers who meet the technical and FPL filing and addressing requirements are permitted to submit their IFR/GAT or mixed flight plans directly to the IFPS via AFTN, SITA or via other communication means.

1.5.2 Flight Plan filing at Budapest Liszt Ferenc International Airport

Pilots of aircraft departing from Budapest Liszt Ferenc International Airport have the possibility to send flight plans to the ATS reporting office via e-mail, fax and by phone.

1.5.3 Flight Plan filing at AFIS aerodrome.

Pilots of aircraft departing from an AFIS aerodrome shall file a flight plan form personally or via telephone to the aerodrome flight information service.

If a flight intends to operate wholly in an aerodrome traffic zone, limited information required by ATS unit can be submitted.

1.5.4 Flight Plan filing at non-AFIS aerodrome.

In case of departure planned from a non-AFIS aerodrome the pilot shall submit a flight plan via telephone or fax to the Area Flight Information Centre (FIC):

Phone:+36 1 296-9102

Phone:+36 1 296-9103

Fax:+ 36 1 296-9151

1.6 Acceptance of a Flight Plan

1.6.1 Flight plans submitted directly to IFPS.

FPLs will be checked by IFPS for syntax, format and content. The flight plan originator will be informed on the acceptance by an ACK message, on the necessary manual correction by a MAN message and on the rejection by a REJ message.

Note: After accepting a flight plan IFPS will determine the ATS units responsible for IFR/GAT flights within IFPS Zone for which and for other addressees indicated in the message the flight plan will be forwarded. Unless a filed flight plan has been acknowledged by IFPS via an ACK message ATS units concerned will not have the flight plan and the aircraft may not begin operation.

1.6.2 When a flight plan is not sent directly to IFPS the receiving unit of FPLs is responsible for:

- checking for format and content to the extent possible,
- calling originator's attention to the errors and giving assistance for correct filing of FPLs,
- indicating acceptance of a flight plan to the originator and
- correct transmission and distribution of flight plans for the parties concerned.

If FPLs are forwarded to FIC or to IFPS via ATS reporting office, originators should inquire about the acceptance of FPLs.

Verbal information, if necessary, will be forwarded by the receiving unit about the acceptance of filed FPLs by IFPS or FIC.

Note: The acceptance of FPL does not relieve the pilot of his/her responsibility for obtaining Air Traffic Control (ATC) clearance for the operation in controlled airspace or in controlled aerodromes as well as for correct preflight preparation.

1.7 Time for Filing a Flight Plan

Unless special circumstances require a flight plan shall be submitted prior to taxi for taking off not earlier than 24 hours and not later than 60 minutes before Estimated off Block Time (EOBT). For flights subject to ATFM measures FPLs shall be submitted at least 3 hours prior to EOBT.

Note: ATFM measures may be applied for IFR/GAT (or mixed) flights operating in Budapest FIR. In this case pilots are responsible to inquire if their flights are subject to ATFM measures. Relevant information can be obtained from ARO at departure aerodrome or from other relevant ATS unit as well as from Flow Management Position at Budapest Area Control Centre (ACC):

Phone:+36 1 293-4183

If FPLs are filed more than 24 hours in advance of EOBT insert the date of flight (DOF) in FPLs.

FPLs may not be filed earlier than 5 days before operation.

AFIL can be filed in the following cases:

- at least 10 minutes before the aircraft is estimated to reach the boundary of controlled airspace if FPLs are submitted for the purpose of obtaining air traffic control clearance for operation in controlled airspace,
- after departure
 - i. in case of search and rescue flights for the purpose of averting the consequences of damage caused by forces of nature, serious disaster and air accident, of police mission as well as of flights for urgent ambulance and medical assistance,
 - ii. in case of departure from field other than aerodrome

as early as possible.

1.8 Cancellation and change of FPL

FPL shall be cancelled by operator to the ATS unit for which FPL has originally been submitted if:

- flight will not operate,
- aircraft wishes to depart before the time indicated in the filed FPL, or
- any changes are required in respect of aerodrome of departure or destination or aircraft identification,

In the latter cases a new FPL, including the modified data, shall be submitted.

For flights subject to ATFM measures the following procedures shall be applied:

- when an FPL or an RPL has been filed by an AO but it is decided, within 4 hours of EOBT, to use an alternative routing between the same aerodromes of departure and destination, a cancellation message with priority "DD" shall be transmitted to all addressees of the previous flight plan, and
- a replacement flight plan (RFP) in the form of the FPL with identical call sign shall be transmitted after the CNL message and with a delay of not less than 5 minutes.
- The replacement flight plan shall contain as the first element of item 18. the indication "RFP/An", where RFP signifies "Replacement Flight Plan" and "n" is the sequence number of RFP.

Operator shall inform the unit for which FPL has previously been submitted if:

- a flight is expected to delay for more than 30 minutes (for flight subject to ATFM measure it is 15 minutes), or

FPL will be cancelled by the competent ATS unit, unless information is received for taxiing, departure or revision for EOBT within 60 minutes after the EOBT.

- any necessary changes in the other items of the previously filed FPL (e.g. cruising speed, cruising level etc.).

Notes:

- i. *Should the cruising level be changed only, it can be done when radio contact is established with ATS units.*
- ii. *Information for cancellation or change must be initiated not more than 12 hours in advance of EOBT.*
- iii. *Receiving units will notify other units to whom the origin FPLs have been forwarded about cancellation and changes.*

1.9 Special handling requirement

In certain cases an aircraft may request special handling from ATS units e.g. ensuring priority, exemption from ATFM measures, etc. Request for such handling shall be indicated in the item 18. (STS/...) of the FPLs using the proper keyword (abbreviation).

Flights for special handling requirement are entitled as follows:

- flights in a state of emergency, including flights subject to unlawful interference,
- flights operating for humanitarian reasons,
- ambulance/medical flights when the safety of life is involved, including flights carrying sick and injured persons on board and flights which operate to the aerodrome of destination with the aim of transporting the above mentioned persons. In addition flights which transporting organs for transplanted, blood plasma and medicines as flights with the aim of transporting them.
- flights operating for search and rescue,
- flights with "Head of State" and "Head of Government" status
- other flights as specifically required by State Authorities.

Unjustified use of keywords (abbreviations) for special handling requirement is disciplinable.

Country	FIR/UIR	ICAO	Country code
Albania	Tirana	LAAA	LA
Armenia	Yerevan	UDDD	UD
Austria	Wien	LOVV	LO
Belgium	Brussels	EBBU/EBUR	EB
Bosnia and Hercegovina	Sarajevo	LQSB	LQ
Bulgaria	Sofia	LBSR	LB
Croatia	Zagreb	LDZO	LD
Cyprus	Nicosia	LCCC	LC
Czech Republic	Prague	LKAA	LK
Denmark	Copenhagen	EKDK	EK
Finland	Finland	EFIN	EF
France	Paris	LFFF	LF
	Reims	LFEF	LF
	Brest	LFRR	LF
	Bordeaux	LFBB	LF
	Marseille	LFMM	LF
Germany	Bremen	EDWW	ED
	Langen	EDGG	ED
	Frankfurt	EDFF	ED
	Munchen	EDMM	ED
	Rhein	EDDU	ED
	Hanover	EDVV	ED
Greece	Athens	LGGA	LG

Country	FIR/UIR	ICAO	Country code
Hungary	Budapest	LHCC	LH
Ireland	Shannon	EISN	EI
	Sota	EISN	EI
Italy	Roma	LIRRR	LI
	Brindisi	LIBB	LI
	Milano	LIMM	LI
Latvia	Riga	EVRR	EV
Former Yugoslav Republic of Macedonia	Skopje	LWSS	LW
Malta	Malta	LMMM	LM
Moldova	Chisinau	LUUU	LU
Monaco	Marseille	LFMM	LN
Marocco	Casablanca	GMMM	GM
The Netherlands	Amsterdam	EHAA	EH
Norway	Norway	ENOR	EN
	Bodo - Oceanic	ENOB	EN
	Trondheim	ENTR	EN
Poland	Warsaw	EPWW	EP
Portugal	Lisbon	LPPC	LP
	Santa Maria	LPPO	LP
Romania	Bucharest	LRBB	LR
Slovak Republic	Bratislava	LZBB	LZ
Slovenia	Ljubljana	LJLA	LJ
Spain	Barcelona	LECB	LE
	Madrid	LECM	LE
	Canarias	GCCC	LE
Sweden	Sweeden	ESSA	ES
Switzerland	Switzerland	LSAS	LS
Turkey	Ankara	LTAA	LT
	Istanbul	LTBB	LT
Ukraine	L'Viv	UKLV	UK
	Kyiv	UKBV	UK
	Dnipropetrovsk	UKDV	UK
	Odessa	UKOV	UK
	Siniferopol	UKFV	UK
United Kingdom	London	EGTT	EG
	Scottish	EGPX	EG
Serbia and Montenegro	Belgrade	LYBA	LY

2. REPETITIVE FLIGHT PLAN

2.1 General

2.1.1 Repetitive flight plans shall be submitted for regular operations as far as possible.

2.1.2 When using repetitive flight plans for flights affecting Budapest FIR, the procedures of ICAO Doc 4444 ATM/501Chapter 16, para 16.4. and Doc 7030 and the following regulations shall be applied.

2.1.3 RPLs, for flights affecting Budapest FIR shall be filed solely with EUROCONTROL at the CFMU, Brussels, in accordance with the requirements and procedures detailed herein. Distribution of RPL data to ATS Units in

AIP HUNGARY

Budapest FIR is provided by the EUROCONTROL.

2.1.4 RPLs for flights having a route portion outside the Zone shall continue to be submitted in parallel to EUROCONTROL and to the National Authorities of those external States in accordance with existing procedures (see paragraph 2.5.2.). It should be noted in particular that ALL affected National Administrations outside the zone which are on the route of the flights MUST have agreed to the use of RPLs.

Note: List of FIRs participating in IFPS zone: See ENR 1.10 para 1.9

2.1.5 Attention is drawn to the fact that the Shanwick (EGGX) and Santa Maria (LPPO) OACCs are NOT within the IFPS Zone.

2.2 Types of submission

2.2.1 RPL data submission may be in the form of a New List or a Revised List.

2.2.2 A New List (NLST) is a submission that contains ONLY new information (typically the start of a new Winter or Summer period).

2.2.3 A Revised List (RLST) is a submission that contains revised information to a previously submitted list. This revised or amended information could be a combination of any of the following: changes, cancellations or additional new flights.

2.3 RPL submission criteria

2.3.1 An NLST must be received by EUROCONTROL with a minimum of 14 days before the intended first flight.

2.3.2 An RLST must be received by EUROCONTROL such that:

- a. there is a minimum of 7 working days (see 2.6.2 below) between reception of the file by EUROCONTROL and the activation of the first flight affected by the amendment, and
- b. there must be two Mondays between reception of the file and the activation of the first flight affected by the amendment.

2.4 RPL submission procedure

2.4.1 RPLs may be submitted in any of the following formats:

- IFPS RPL format (former DBO/DBE format) - via diskette, SITATEX or electronic file transfer
- ICAO format (hard copy) - on paper (ICAO Doc 4444)

2.4.2 Details of IFPS RPL format may be found in the IFPS User Manual section of the CFMU Handbook. Copies can be obtained from the EUROCONTROL Library at the address. See: 2.6.3

2.4.3 On receipt of an RPL file, EUROCONTROL will send the following acknowledgement of receipt by SITA or Fax as appropriate.

Example of ACKNOWLEDGEMENT of reception sent to RPL Originators(SITA or FAX)

ZCZC 001 251220

QN

MADWEZZ

BRUER7X

ddhhmm

FROM:

EUROCONTROL/CFMU

TO:

ZZZ

ATTN:

Mrs. Brown

SUBJ:

ACK OF YR RPL SUBMISSION 96-01

Nr.RPL:

12

- INITIAL CHECK OF FORMAT OK.

- FURTHER PROCESSING IN PROGRESS. WE WILL CONTACT YOU IF NECESSARY

**Example of ACKNOWLEDGEMENT of reception sent to
RPL Originators(SITA or FAX)**

BRGDS
D.TAYLOR/RPL TEAM

- 2.4.4 If NO acknowledgement is received from EUROCONTROL within 2 working days of dispatch, the originator MUST contact the RPL Team to confirm that the file has been received.
- 2.4.5 Following the acknowledgement the RPL Team will process the file and will contact the originator again ONLY if there are any problems, such as the route or validity periods. It follows, therefore, that if no subsequent query is initiated by EUROCONTROL, the originator can assume that the file has been successfully processed into the RPL database.
- 2.4.6 Any change to the address or contact number of the Aircraft Operator (for example, a change of contact number/address for obtaining supplementary information) must be advised to the RPL Team immediately.
- 2.4.7 EUROCONTROL is able to accept RPL data which covers more than one Winter/Summer period but Originators must ensure that any such data is amended to reflect any changes of the clock (i.e. to reflect Summer/Winter time).

2.5 Specific EUROCONTROL requirements for RPL operation

- 2.5.1 The basic principles for the submission of Repetitive Flight Plans are contained in ICAO Docs 4444/501 and 7030. The following paragraphs detail the differences between the ICAO Standard and the EUROCONTROL requirement, which permits a more flexible approach within the basic rules. Full details are contained in the IFPS User Manual section of the CFMU Handbook.
- 2.5.2 RPLs shall cover the entire flight from the departure aerodrome to the destination aerodrome. Therefore, an RPL shall be submitted by the flight plan originator for the entire route. A mixture of both RPL and FPL message shall not be permitted. RPL procedures shall be applied ONLY when ALL ATS authorities concerned with the flights have agreed to accept RPLs. In this respect, all States of the IFPS zone accept RPLs. It is the responsibility of the AO to ensure that RPLs for flights which are partly outside the zone are properly coordinated and addressed to the relevant external ATS authorities.
- 2.5.3 For EUROCONTROL purposes an RLST may be submitted which contains only changes, cancellations and additions (i.e. "-" and "+"). Details of unchanged flights (i.e. "blanks") are not required.
- 2.5.4 The "-" must come before the "+".
- 2.5.5 For a cancellation or change, the "-" must be an exact duplicate of the original "+" that it is to cancel, in order for it to be accepted by the RPL processing system.
- 2.5.6 The NLSTs and RLSTs are to be numbered in sequence as this enables EUROCONTROL to ensure that the lists are entered into the RPL database in the correct order. It also provides a double check for possible missing submissions. The first NLST of the season should be numbered 001 and each following list, regardless of whether it is a NLST or RLST, is to be numbered in sequence.
- 2.5.7 The numbering of the RPL submissions is done on line "0" (sender record) starting at character 37 of the diskette file and in field "E" of a ICAO hard copy file (on paper).
- 2.5.8 To suspend an RPL the originator should send the information in the format *See ENR 1.10 para 2.7* However, originators should note that flights cannot be suspended for less than 3 days. If the suspension is for less than 3 days, individual daily cancellation messages must be sent by the originator to the IFPS in order not to waste ATC capacity by leaving "ghost" flights in the CFMU and ATC data bases.
- 2.5.9 To cancel a RPL for a specific day, the originator need only send a normal ICAO CNL message to BOTH of the IFPS units (EUCHZMFP and EUCBZMFP or BRUEP7X and PAREP7X) and other external ATS Units as necessary. In respect of such flights, cancellation messages to the IFPS Units shall be submitted not earlier than 20 hours before the EOBT of the flight. The same rule applies for a change (CHG) or delay (DLA) message since at 20 hours before EOBT the RPL is transferred to the IFPS and the RPL effectively becomes an FPL.
- 2.5.10 To recover any RPL which has been suspended for an undefined period, the originator must send the instruction in the format *See ENR 1.10 para 2.8*
- 2.5.11 It is emphasized that the requirements specified in paragraphs 2.5.3, 2.5.5, 2.5.6, 2.5.7, 2.5.8, 2.5.9, 2.5.10 are not applicable to route portions outside the IFPS Zone.

AIP HUNGARY

2.6 General information

- 2.6.1** RPL data at EUROCONTROL is handled by a dedicated section known as the RPL Team.
- 2.6.2** The RPL Team working day is from 0800 to 1715 (European time) Monday to Friday, including Public Holidays but excluding 25 December. Originators of RPL data should take these operating hours into account when submitting RPL data to EUROCONTROL.
- 2.6.3** RPL data files may be sent to EUROCONTROL by any of the following means of communication:
EUROCONTROL CFMU FDO/RPL Team
Post:Rue de la Fusee, 96 B -1130 Brussels, Belgium
SITA:BRUER7X
Fax:32.2.729.9042
Phone:32.2.729.9847
Phone:32.2.729.9861
Phone:32.2.729.9866
- 2.6.4** The use of hard copy via post is discouraged. Submission via diskette, SITATEX or electronic file transfer removes the chance of an RPL operator making any typographical errors when copying the data from the hard copy into the IFPS RPL system.

2.7 Suspension of RPLs

- 2.7.1** To suspend an RPL/s, the RPL originator must send by SITA, FAX a letter to the EUROCONTROL RPL Office with an instruction with contains the following information:

Please suspend the following flights with effect from ddmm until ddmm.

AIRCRAFT-ID	VAL-FROM	VAL-UNTIL	DAYS-OF-OPERATION	ADEP	EOBT	ADES
-------------	----------	-----------	-------------------	------	------	------

Note:

- i. Flights can not be suspended for periods of less than 3 days
 - ii. A suspension message shall be received by not less than 48 hours before the EOBT of the earliest affected flight/s. When sufficient notice cannot be given, individual CNL messages must be filed.
 - iii. If the UNTIL is not filled in, then a Recovery message will have to be send.
- 2.7.2** A RSUS message is an ADEXP message which has not been implemented in the RPL system. This message shall not be used. Originators should use the media and layout described above.

2.8 Recovery of RPLs

- 2.8.1** To recover an RPL/s, the RPL originator must send by SITA, FAX a letter to the EUROCONTROL RPL Office with an instruction with contains the following information:

Please recover the following flights with effect from ddmm.

AIRCRAFT-ID	VAL-FROM	VAL-UNTIL	DAYS-OF-OPERATION	ADEP	EOBT	ADES
-------------	----------	-----------	-------------------	------	------	------

Note: A recovery message shall be received by not less than 48 hours before the EOBT of the earliest affected flight/s. When sufficient notice cannot be given, individual FPL messages must be filed.

- 2.8.2** The RREC message is an ADEXP message which has not been implemented in the RPL system. This message shall not be used. Originators should use the media and layout described above.

THIS PAGE INTENTIONALLY LEFT BLANK

2. SIGNALS FOR USE IN THE EVENT OF INTERCEPTION**2.1 Signals initiated by intercepting aircraft and responses by intercepted aircraft**

Series	INTERCEPTING aircraft signals	Meaning	INTERCEPTED aircraft responds	Meaning
1.	<p>DAY or NIGHT - Rocking aircraft and flashing navigational lights at irregular intervals (and landing lights in the case of a helicopter) from a position slightly above and ahead of, and normally to the left of, the intercepted aircraft (or to the right if the intercepted aircraft is a helicopter) and, after acknowledgment, a slow level turn, normally to the left (or to the right in the case of a helicopter) on the desired heading.</p> <p>Note 1. - Meteorological conditions or terrain may require the intercepting aircraft to reverse the positions and direction of turn given above in Series 1.</p> <p>Note 2.- If the intercepted aircraft is not able to keep pace with the intercepting aircraft, the latter is expected to fly a series of race-track patterns and to rock the aircraft each time it passes the intercepted aircraft.</p>	You have been intercepted. Follow me.	<p>DAY or NIGHT - Rocking aircraft, flashing navigational lights at irregular intervals and following.</p> <p>Note: Additional action required to be taken by intercepted aircraft is prescribed in Annex 2, Chapter 3, item 3.8.</p>	Understood, will comply.
2	<p>DAY or NIGHT - An abrupt break-away manoeuvre from the intercepted aircraft consisting of a climbing turn of 90 degrees or more without crossing the line of flight of the intercepted aircraft.</p>	You may proceed.	DAY or NIGHT - Rocking the aircraft.	Understood, will comply.

Series	INTERCEPTING aircraft signals	Meaning	INTERCEPTED aircraft responds	Meaning
3	DAY or NIGHT - Lowering landing gear (if fitted) showing steady landing lights and overflying runway in use or, if the intercepted aircraft is a helicopter, overflying the helicopter landing area. In the case of helicopters, the intercepting helicopter makes a landing approach, coming to hover near to the landing area.	Land at this aerodrome	DAY or NIGHT - Lowering landing gear (if fitted), showing steady landing lights and following the intercepting aircraft and, if after overflying the runway in use or helicopter landing area, landing is considered safe, proceeding to land.	Understood, will comply.

2.2 Signals initiated by intercepted aircraft and responses by intercepting aircraft

Series	INTERCEPTED aircraft responds	Meaning	INTERCEPTING aircraft signals	Meaning
4	DAY or NIGHT - Raising landing gear (if fitted) and flashing landing lights while passing over runway in use or helicopter landing area at a height exceeding 1000 ft (300 m) but not exceeding 2000 ft (600 m) (in the case of a helicopter, at a height exceeding 170 ft (50 m) but not exceeding 330 ft (100 m)) above the aerodrome level, and continuing to circle runway in use or helicopter landing area. If unable to flash landing lights, flash any other lights available.	Aerodrome you have designated is inadequate.	DAY or NIGHT - If it is desired that the intercepted aircraft follow the intercepting aircraft to an alternate aerodrome, the intercepting aircraft raises its landing gear (if fitted) and uses the Series 1 signals prescribed for intercepting aircraft. If it is decided to release the intercepted aircraft, the intercepting aircraft uses the Series 2 signals prescribed for intercepting aircraft.	Understood, follow me. You may proceed.
5	DAY or NIGHT - Regular switching on and off of all available lights but in such a manner as to be distinct from flashing lights.	Cannot comply.	DAY or NIGHT - Use Series 2 signals prescribed for intercepting aircraft.	Understood.
6	DAY or NIGHT - Irregular flashing of all available lights.	In distress.	DAY or NIGHT - Use Series 2 signals prescribed for intercepting aircraft.	Understood.

ENR 2 AIR TRAFFIC SERVICES AIRSPACE

ENR 2.1 FIR, CTA, TMA, MTMA, MCTR

1. FIR, CTA, TMA

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
BUDAPEST FIR The borders of Hungary FL 660 GND	BUDAPEST ACC	BUDAPEST CONTROL/RADAR EN, HU H24		The airspace layer between FL290- FL410 (both inclusive) of Budapest FIR is part of the EUR RVSM airspace.
	BUDAPEST FIC	BUDAPEST INFORMATION EAST EN, HU H24	133.000MHZ	East from river Danube Offset carrier mode operation
		BUDAPEST INFORMATION WEST EN, HU H24	125.500MHZ	West from river Danube Offset carrier mode operation
	BUDAPEST INFORMATION NORTH EN, HU H24	119.350MHZ	Uncontrolled airspace under Budapest TMA	

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
BUDAPEST CTA Lateral limits as for Budapest FIR FL 660 9500 FT AMSL C	BUDAPEST ACC	BUDAPEST CONTROL/RADAR EN, HU H24	123.635 CH 120.375 MHz 128.105 CH 128.955 CH 130.575 MHz 132.055CH 132.790CH 133.200MHz 133.535CH 135.205CH 135.555CH	Standby Standby
			136.380CH	

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency/ Purpose	Remarks
1	2	3	4	5
			234.250MHz UHF 264.650MHz UHF 290.650MHz UHF	UHF frequencies available for use by 8.33 exempted State aircraft and in case of VHF COM failure

Name Lateral limits Vertical limits Class of airspace	Unit providing service	Call sign Languages Area and conditions of use Hours of service	Frequency /Purpose	Remarks
1	2	3	4	5
BUDAPEST TMA C	BUDAPEST TRCC	BUDAPEST APPROACH EN, HU	129.7MHZ 122.975MHZ 119.5MHZ	
BUDAPEST TMA PARTS				
BUDAPEST TMA1 474419N 0181530E along border HUNGARY_SLOVAKREPUBLIC - 474551N 0182754E - 473503N 0182754E - 470908N 0184432E - 471331N 0181507E - 473521N 0181527E - 474419N 0181530E FL 195 7500 FT ALT C				
BUDAPEST TMA2 474551N 0182754E along border HUNGARY_SLOVAKREPUBLIC - 474527N 0183705E - 473233N 0184156E - 472516N 0185346E - 470806N 0185112E - 470908N 0184432E - 473503N 0182754E - 474551N 0182754E FL 195 6500 FT ALT C				
BUDAPEST TMA3 474527N 0183705E - 473233N 0184156E - 472516N 0185346E - 470806N 0185112E - 470403N 0191630E - 470606N 0192729E - 472525N 0185940E - 473055N 0190118E - 473220N 0185858E - 473500N 0185300E - 473720N 0185425E - 474643N 0190652E - 474750N 0184351E along border HUNGARY_SLOVAKREPUBLIC - 474527N 0183705E FL 195 3500 FT ALT C				
BUDAPEST TMA4 474643N 0190652E - 473720N 0185425E - 473500N 0185300E - 473220N 0185858E - 473055N 0190118E - 473054N 0190159E - 473612N 0190412E - 474615N 0191631E - 474643N 0190652E FL 195 2500 FT ALT C				
BUDAPEST TMA5 474750N 0184351E - 474643N 0190652E - 474615N 0191631E - 474503N 0194053E - 475224N 0193441E - 480513N 0192330E along border HUNGARY_SLOVAKREPUBLIC - 474750N 0184351E FL 195 6500 FT ALT C				

ENR 3.3 AREA NAVIGATION (RNAV) ROUTES

Nil

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 4.4 NAME-CODE DESIGNATORS FOR SIGNIFICANT POINTS

Nil

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 4.4-1 NAME-CODE DESIGNATORS FOR FRA SIGNIFICANT POINTS

Name-code designator	Coordinates	FRA relevance	Remarks/Usage
1	2	3	4
ABETI	474040N 0170046E	(X) Exit Point	EVEN FLs for all exiting aircraft
ABONY	471615N 0195845E	(A) Arrival Point (First way point of the STAR/transition procedure for LHBP)	
ABULI	482903N 0202912E	(X) Exit Point	EVEN FLs for all exiting aircraft
AGMAS	472903N 0194130E	(H) Holding Point (Terminal holding point)	ARR LHBP
ALAMU	474413N 0181948E	(E) Entry Point	ODD FLs for all entering aircraft
AMRAX	480529N 0192158E	(X) Exit Point	EVEN FLs for all exiting aircraft
ARSIN	473402N 0164513E	(X) Exit Point	EVEN FLs for all exiting aircraft
BABIT	455554N 0185544E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
BABOX	465345N 0194059E	(D) Final point of the SID procedure for LHKE	DEP LHKE
BADOR	473425N 0220629E	(X) Exit Point	ODD FLs for all exiting aircraft
BADOV	480116N 0184857E	(D) Final point of the SID procedure for LHBP	DEP LHBP
BALAP	480405N 0191500E	(E) Entry Point	ODD FLs for all entering aircraft
BALUX	472027N 0190746E	(I) Intermediate point	Mandatory waypoint for LOWW ARR except from KEKED. See also ENR 6 LHCC ERC MISC chart
BAREB	454446N 0182448E	(E / X) Entry / Exit Point	Only below 9500 feet AMSL EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
BEGLA	474951N 0170652E	(X) Exit Point	EVEN FLs for all exiting aircraft
BINKU	465534N 0202733E	(D) Final point of the SID procedure for LHKE	DEP LHKE
BOKSI	463807N 0194951E	(A) Arrival point (First way point of the STAR for LHKE)	
BUDOP	464115N 0212948E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft

Name-code designator	Coordinates	FRA relevance	Remarks/Usage
1	2	3	4
DEGET	462937N 0211602E	(E) Entry Point	EVEN FLs for all entering aircraft
DEMOP	481029N 0200325E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
DIMLO	464101N 0162522E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
DODAR	471252N 0193139E	(I) Intermediate Point	
EBORO	462121N 0195915E	(I) Intermediate Point	
EPARI	474111N 0185841E	(I) Intermediate Point	Mandatory waypoint for LOWW DEP entering to HUFRA via ALAMU. See also ENR 6 LHCC ERC MISC chart
ERGOM	474830N 0184359E	(E) Entry Point	ODD FLs for all entering aircraft
ERLOS	470403N 0191630E	(D) Final point of the SID procedure for LHBP	DEP LHBP
ETARO	473000N 0190000E	(I) Intermediate Point	
ETNOG	473938N 0215812E	(I) Intermediate Point	
GELKA	480605N 0201359E	(I) Intermediate Point	Mandatory waypoint for ARR LHBP entering to HUFRA via LONLA, KEKED, PITOK. See also ENR 6 LHCC ERC MISC chart
GEMTO	480800N 0223540E	(X) Exit Point	ODD FLs for all exiting aircraft
GILEP	472900N 0181532E	(D) Final point of the SID procedure for LHBP	DEP LHBP
GITAS	470317N 0181027E	(I) Intermediate Point	Mandatory waypoint for LZIB DEP entering to HUFRA via VAMOG, See also ENR 6 LHCC ERC MISC chart
GOTAR	465952N 0161329E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
INVED	460928N 0202405E	(X) Exit Point	ODD FLs for all exiting aircraft
KARIL	474738N 0222632E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
KEKED	483123N 0211729E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
KENIN	482142N 0215538E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
KEROP	461104N 0194148E	(X) Exit Point	ODD FLs for all exiting aircraft

AIP HUNGARY

Name-code designator	Coordinates	FRA relevance	Remarks/Usage
1	2	3	4
KOLUM	482616N 0210429E	(A) Arrival Point (First way point of the STAR/transition procedure for LZKZ)	ARR LZKZ see AIP Slovakia
KOPRY	461425N 0165746E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
KOVEK	475050N 0203010E	(I) Intermediate Point	
KUSIS	475218N 0222302E	(I) Intermediate Point	For tactical re-routing in case TRA 32/33 active
KUVEX	475430N 0172615E	(X) Exit Point	ARR LZIB
LITKU	481350N 0193555E	(X / D) Exit / Final point of the SID procedure for LHBP	EVEN FLs for all exiting aircraft
LONLA	482024N 0221911E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
LUVEL	464600N 0212010E	(I) Intermediate Point	For tactical re-routing in case TRA 32/33 active
MAVIR	462354N 0194931E	(I / D) Intermediate / Final point of the SID procedure for LHKE	DEP LHKE
MEGIK	471230N 0215140E	(E) Entry Point	EVEN FLs for all entering aircraft
MOGMA	475220N 0165602E	(E) Entry Point	ODD FLs for all entering aircraft ARR LZIB
MOPUG	460949N 0204229E	(E) Entry Point	EVEN FLs for all entering aircraft
NALAG	480233N 0194557E	(D) Final point of the SID procedure for LHBP	DEP LHBP
NALOX	465211N 0164912E	(D / A) Final point of the SID procedure for LHSM airport / First way point of the STAR for LHSM	DEP/ARR LHSM
NARKA	471454N 0215136E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
NATEX	474449N 0173000E	(A) Arrival Point (First way point of the STAR for LOWW airport)	
NIKAB	463709N 0173244E	(I) Intermediate Point	
NIPUR	474302N 0200047E	(I) Intermediate Point	For tactical re-routing in case TRA 32/33 active
NORAH	473658N 0194829E	(I / D) Intermediate / Final point of the SID procedure for LHBP	DEP LHBP
OGVUN	472306N 0175120E	(D / A) Final point of the SID procedure for LHPA airport / First way point of the STAR for LHPA	DEP/ARR LHPA

Name-code designator	Coordinates	FRA relevance	Remarks/Usage
1	2	3	4
OKORA	464559N 0182217E	(I) Intermediate Point	
OLATI	465914N 0172845E	(I) Intermediate Point	
OSLEN	464336N 0202145E	(A) Arrival Point (First way point of the STAR for LHKE)	
PARAK	460950N 0200539E	(E / X) Entry / Exit Point	EVEN FLs for all entering aircraft ODD FLs for all exiting aircraft
PATAK	480423N 0190738E	(X) Exit Point	EVEN FLs for all exiting aircraft
PERIT	474718N 0213722E	(I / A / D) Intermediate / First way point of the STAR for LHDC Final point of the SID procedure for LHDC	ARR/DEP LHDC
PESAT	474254N 0170311E	(X) Exit Point	ARR LOWW airport see AIP Austria
PIDON	460720N 0180410E	(I / A / D) Intermediate / First way point of the STAR for LHPP Final point of the SID procedure for LHPP	ARR/DEP LHPP
PITOK	481929N 0202218E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
PUSTA	470908N 0184432E	(D) Final point of the SID procedure for LHBP	DEP LHBP
RIGSA	480952N 0204506E	(I) Intermediate Point	Mandatory waypoint for DEP/ARR LHBP. See also ENR 6 LHCC ERC MISC chart
ROMKA	481319N 0215025E	(I) Intermediate Point	Mandatory in case of LHTRA32B and LHTRA33B active
SASAL	471705N 0162828E	(E) Entry Point	ODD FLs for all entering aircraft
SIRDU	471517N 0171955E	(I) Intermediate Point	Mandatory waypoint for LOWW DEP entering to HUFRA via STEIN
SOGMO	463637N 0174103E	(I) Intermediate Point	
SOPRO	473516N 0164809E	(E / X) Entry / Exit Point	Only below 9500 feet AMSL ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
STEIN	472539N 0163559E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft Exit only for DEP LHPA
SUBES	472516N 0172536E	(I) Intermediate Point	
SUNIS	470831N 0162059E	(X) Exit Point	EVEN FLs for all exiting aircraft

AIP HUNGARY

Name-code designator	Coordinates	FRA relevance	Remarks/Usage
1	2	3	4
SUNOR	462847N 0171750E	(D / A) Final point of the SID procedure for LHSM First way point of the STAR for LHSM	DEP/ARR LHSM
TEGRI	461546N 0210616E	(X) Exit Point	ODD FLs for all exiting aircraft
TEKNO	473726N 0172432E	(I) Intermediate Point	
TONDO	460250N 0192121E	(E) Entry Point	EVEN FLs for all entering aircraft
TORNO	473223N 0182924E	(I / D) Intermediate / Final point of the SID procedure for LHBP	1.) Mandatory waypoint for ARR LOWW and entering to HUFRA via KEKED. See also ERC MISC-4 2.) DEP LHBP
UVERA	471200N 0202547E	(I) Intermediate Point	For tactical re-routing in case TRA 32/33 active
VAMOG	474714N 0173945E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
VEBAL	455929N 0171748E	(E / X) Entry / Exit Point	ODD FLs for all entering aircraft EVEN FLs for all exiting aircraft
VEBOS	471823N 0183814E	(A) Arrival Point (First way point of the STAR/transition procedure for LHBP)	
VERIG	471020N 0214329E	(I / A / D) Intermediate / First way point of the STAR for LHDC Final point of the SID procedure for LHDC	ARR/DEP LHDC
XOMBA	474524N 0180343E	(X) Exit Point	ARR LZIB

THIS PAGE INTENTIONALLY LEFT BLANK

ENR 6 EN-ROUTE CHARTS

Title	Page
LHCC ERC - En-route Chart - ICAO	ENR 6-LHCC-ERC - 1
LHCC ERC MISC 1-3 - Appendix to En-route Chart - ICAO	ENR 6-LHCC-MISC-1-6
LHCC PRD - Prohibited, Restricted and Danger Areas	ENR 6-LHCC-PRD - 1
LHCC TRA - Military Excercise Areas	ENR 6-LHCC-TRA - 1

THIS PAGE INTENTIONALLY LEFT BLANK


COMMUNICATION:

BUDAPEST ACC
128.105 CH (stand by)
133.535 CH (stand by)
120.375 MHz
123.635 CH
128.955 CH
130.575 MHz
132.065 CH
132.790 CH
133.200 MHz
135.205 CH
135.555 CH
136.380 CH
234.250 MHz
264.650 MHz
290.650 MHz

BUDAPEST FIC
119.350 MHz
125.500 MHz
133.000 MHz
129.700 MHz
122.975 MHz
119.500 MHz

BUDAPEST TRC (APPROACH)

for 8.33 exempted UHF equipped state aircraft

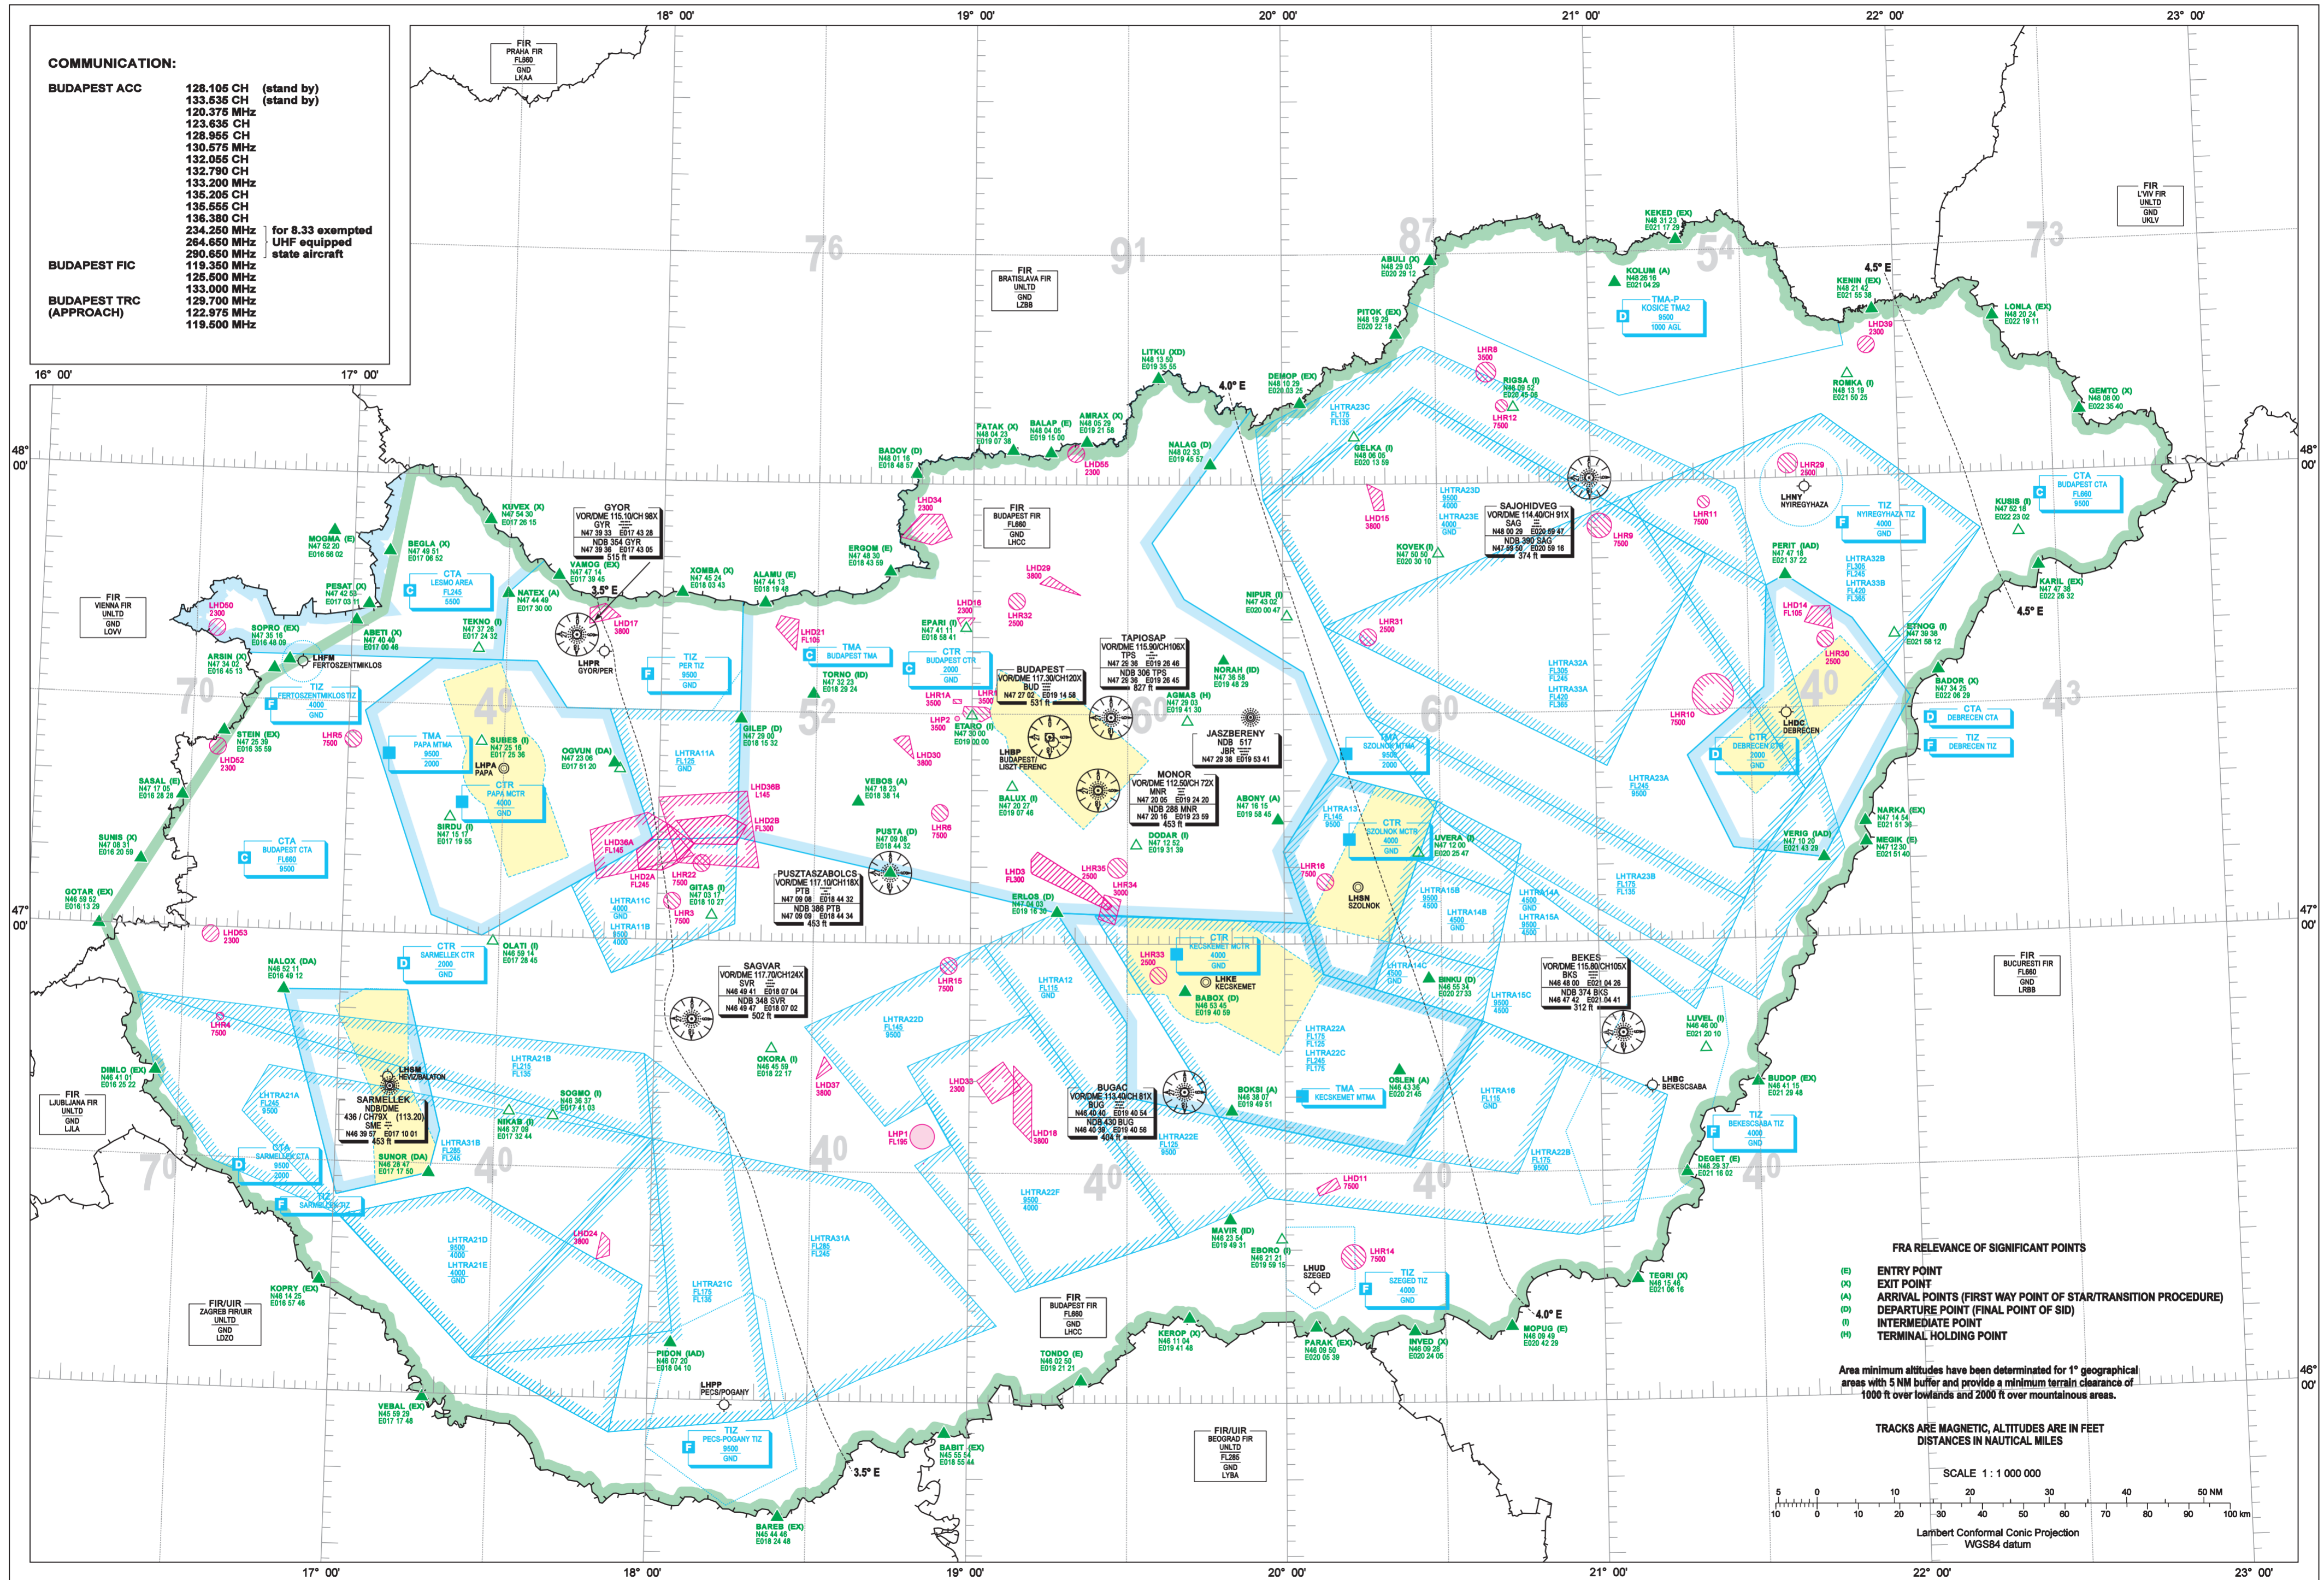


FRA RELEVANCE OF SIGNIFICANT POINTS

- (E) ENTRY POINT
- (X) EXIT POINT
- (A) ARRIVAL POINTS (FIRST WAY POINT OF STAR/TRANSITION PROCEDURE)
- (D) DEPARTURE POINT (FINAL POINT OF SID)
- (I) INTERMEDIATE POINT
- (H) TERMINAL HOLDING POINT

Area minimum altitudes have been determined for 1° geographical areas with 5 NM buffer and provide a minimum terrain clearance of 1000 ft over lowlands and 2000 ft over mountainous areas.

TRACKS ARE MAGNETIC, ALTITUDES ARE IN FEET
DISTANCES IN NAUTICAL MILES

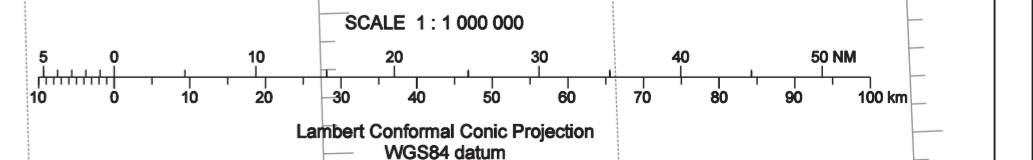


THE PAGE INTENTIONALLY LEFT BLANK

AIP HUNGARY


APPENDIX 1 TO ENR 6-LHCC-ERC
COMPULSORY AND PLANNABLE LINKS

1. LHBP DEP within Budapest FIR

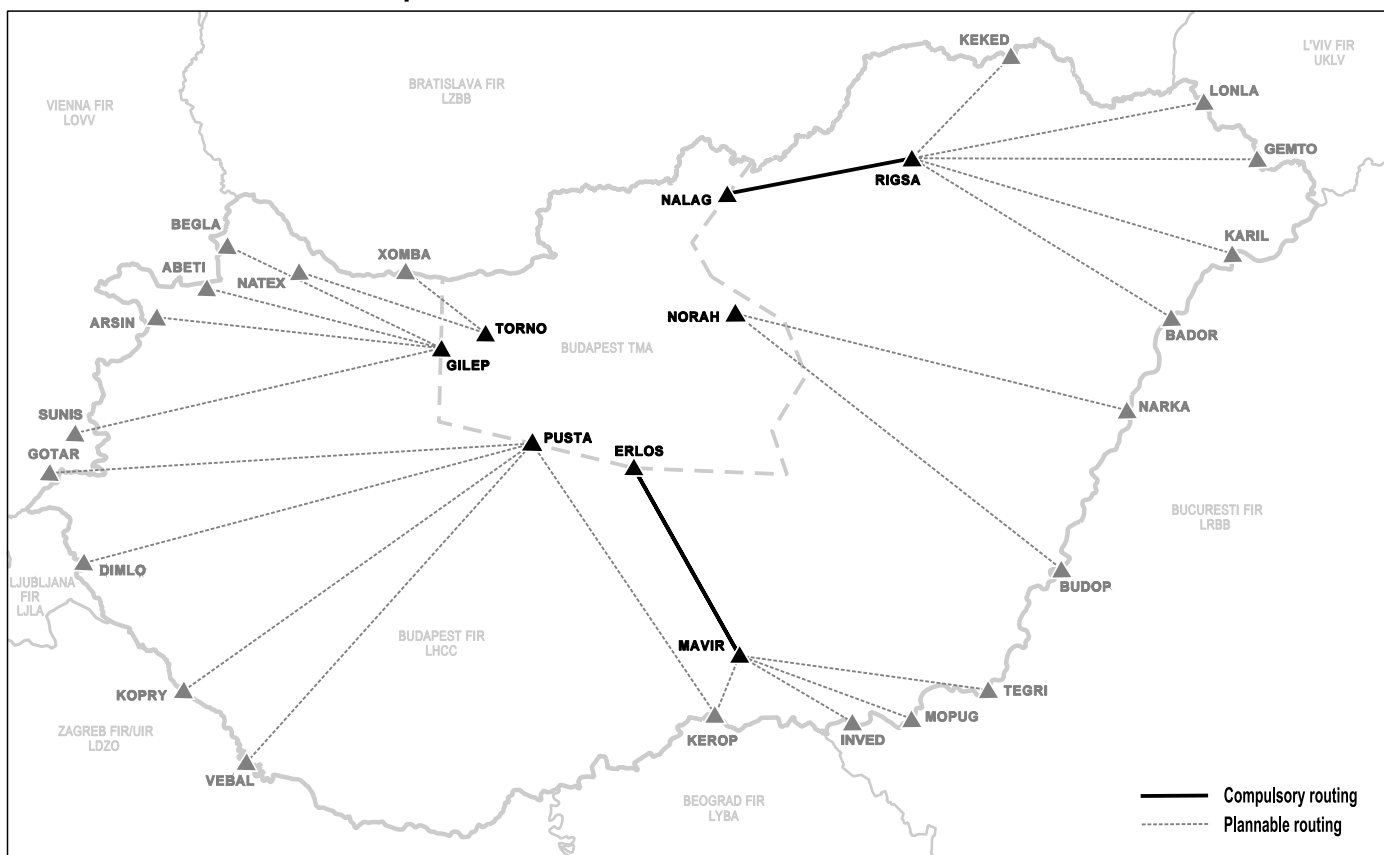

Airport	SID End Point	HUFRA Mandatory Intermediate Point	HUFRA (X) Exit Point	Flight Plan (Item 15)	Remark
LHBP	NALAG	RIGSA	KEKED, LONLA, GEMTO, KARIL, BADOR	NALAG DCT RIGSA DCT (X)	
	NORAH		NARKA, BUDOP	NORAH DCT (X)	
	ERLOS	MAVIR	TEGRI, MOPUG, INVED	ERLOS DCT MAVIR DCT (X)	
			KEROP	ERLOS DCT MAVIR DCT KEROP	Below FL135
	PUSTA		KEROP, VEBAL, KOPRY, DIMLO, GOTAR	PUSTA DCT (X)	
	GILEP		SUNIS, ARSIN, ABETI, BEGLA	GILEP DCT (X)	
	TORNO		NATEX	TORNO DCT NATEX	Only for city pair LHBP - LOWW
	TORNO		XOMBA	TORNO DCT XOMBA	Only for city pair LHBP - LZIB

2. LHBP ARR within Budapest FIR

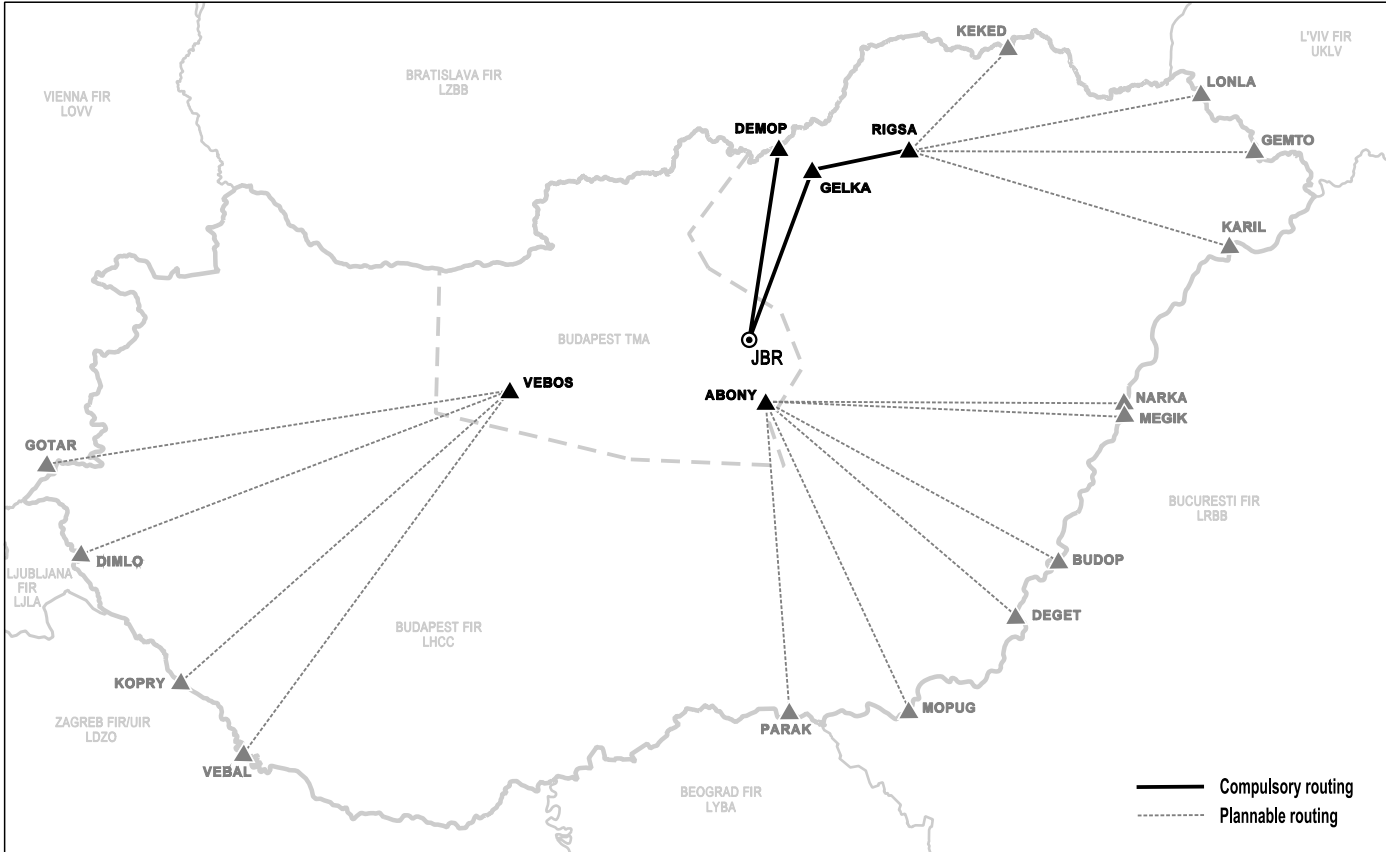


HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	Transition Initial Point	Airport	Flight Plan (Item 15)	Remark
KEKED, LONLA, GEMTO, KARIL	RIGSA - GELKA	JBR	LHBP	(E) DCT RIGSA DCT GELKA DCT JBR	
DEMOP		JBR		DEMOP DCT JBR	
NARKA, MEGIK, BUDOP, DEGET, MOPUG, PARAK		ABONY		(E) DCT ABONY	
VEBAL, KOPRY, DIMLO, GOTAR		VEBOS		(E) DCT VEBOS	
STEIN					STEIN not available for ARR LHBP

AIP HUNGARY


APPENDIX 2 TO ENR 6-LHCC-ERC
COMPULSORY AND PLANNABLE LINKS

3. LOWW DEP within Budapest FIR

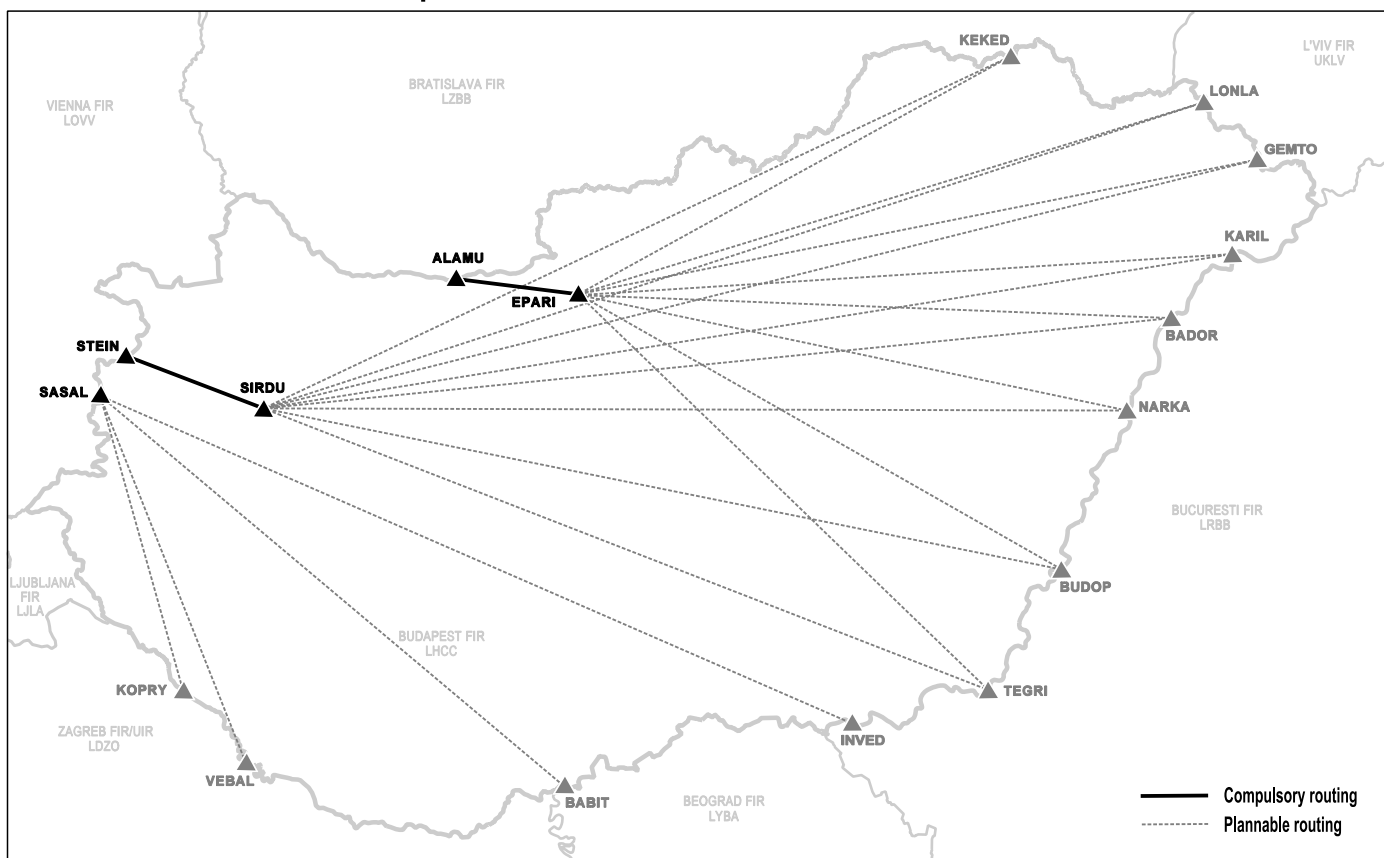

Airport	HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	HUFRA (X) Exit Point	Flight Plan (Item 15)	Remark
LOWW	ALAMU	EPARI	KEKED, LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI	ALAMU DCT EPARI DCT (X)	
	STEIN	SIRDU	KEKED, LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI	STEIN DCT SIRDU DCT (X)	
	SASAL		INVED, BABIT, VEBAL, KOPRY	SASAL DCT (X)	


4. LOWW ARR within Budapest FIR

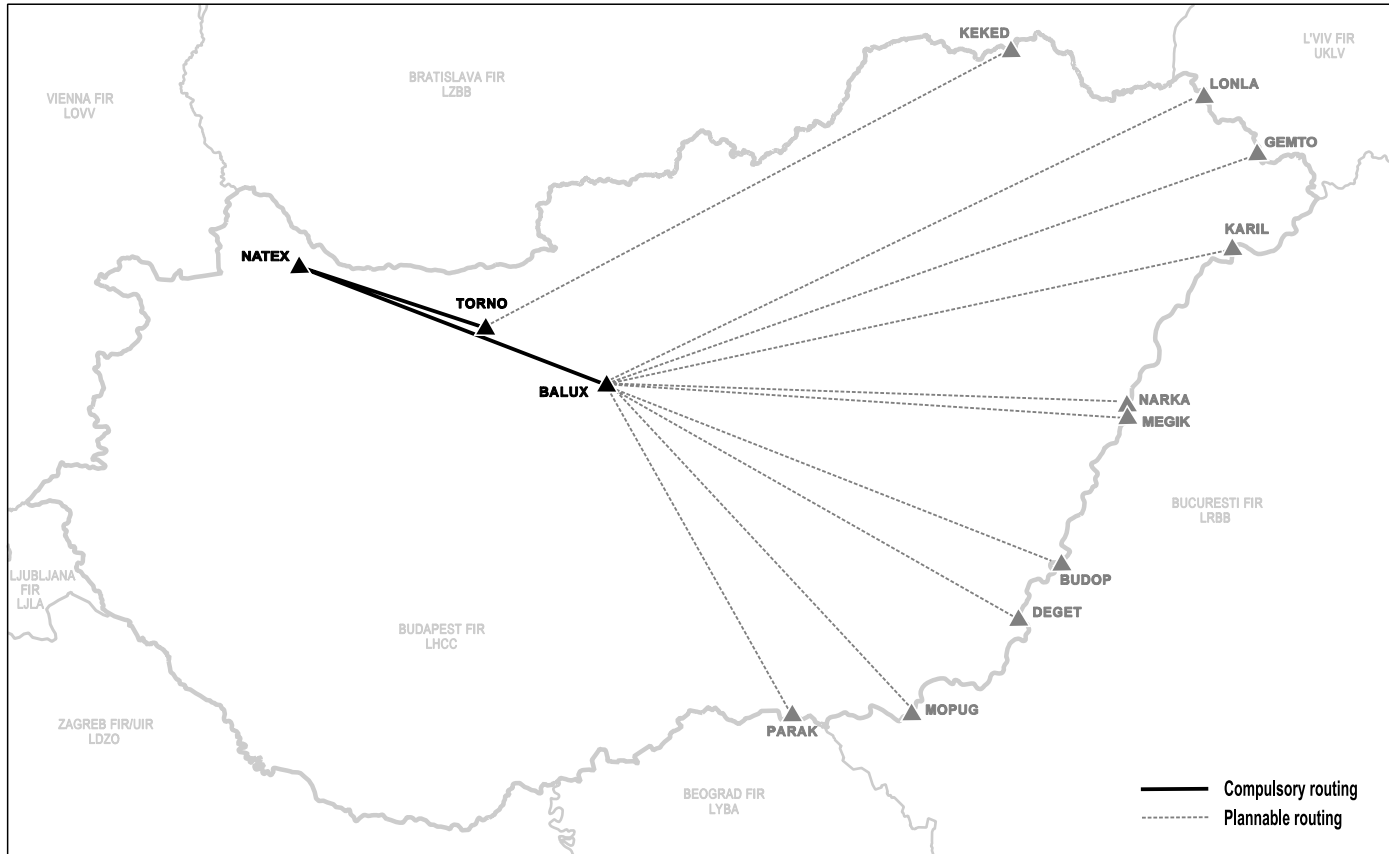

HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	Transition Initial Point	Airport	Flight Plan (Item 15)	Remark
KEKED (and for DEP LHBP via TORNO SID)	TORNO	NATEX	LOWW	(E) DCT TORNO DCT NATEX	
LONLA, GEMTO, KARIL, NARKA, MEGIK, BUDOP, DEGET, MOPUG, PARAK	BALUX	NATEX		(E) DCT BALUX DCT NATEX	


APPENDIX 3 TO ENR 6-LHCC-ERC
COMPULSORY AND PLANNABLE LINKS

5. LZIB DEP within Budapest FIR

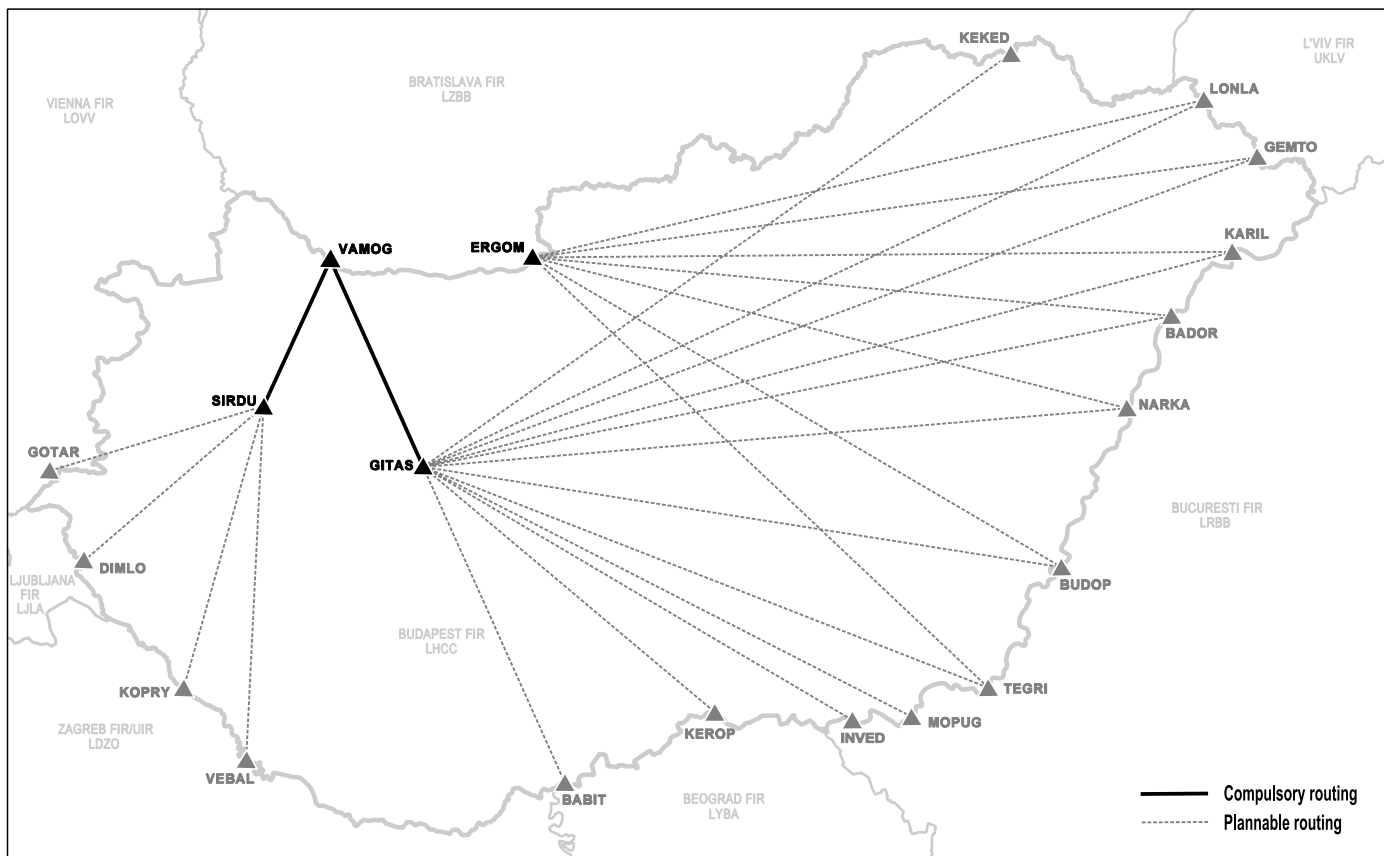

Airport	HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	HUFRA (X) Exit Point	Flight Plan (Item 15)	Remark
LZIB	VAMOG	SIRDU	VEBAL, KOPRY, DIMLO, GOTAR	VAMOG DCT SIRDU DCT (X)	
	VAMOG	GITAS	KEKED, LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI, MOPUG, INVED, KEROP, BABIT	VAMOG DCT GITAS DCT (X)	
	ERGOM		LONLA, GEMTO, KARIL, BADOR, NARKA, BUDOP, TEGRI	ERGOM DCT (X)	

6. LZIB ARR within Budapest FIR

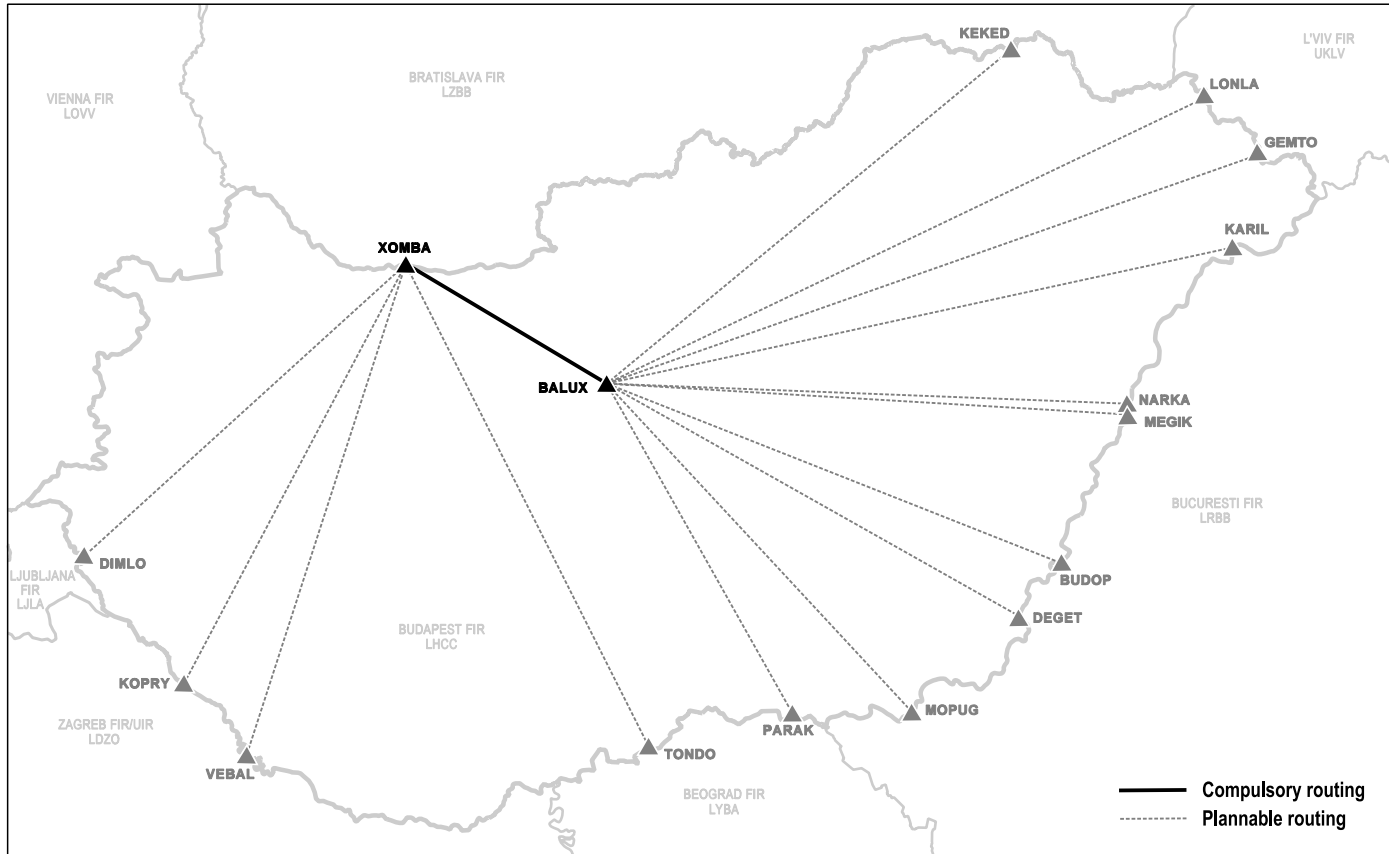

HUFRA (E) Entry Point	HUFRA Mandatory Intermediate Point	Transition Initial Point	Airport	Flight Plan (Item 15)	Remark
KEKED, LONLA, GEMTO, KARIL, NARKA, MEGIK, BUDOP, DEGET, MOPUG, PARAK	BALUX	XOMBA	LZIB	(E) DCT BALUX DCT XOMBA	
TONDO, VEBAL, KOPRY, DIMLO		XOMBA		(E) DCT XOMBA	

LHBP AD 2.1 AERODROME LOCATION INDICATOR - NAME

LHBP BUDAPEST LISZT FERENC INTERNATIONAL AIRPORT

LHBP AD 2.2 AERODROME GEOGRAPHICAL DATA AND ADMINISTRATION

1	ARP coordinates and site at AD	472621.58N 0191542.51E at intersection of TWYs "A", "N" and "K"
2	Direction and distance from (city)	16 km, ESE (115°) from down-town Budapest
3	Elevation/Reference temperature	151.3 M/22°C
4	Geoid undulation	44 M
5	MAG VAR/ annual change	4° E/0.1 (2009)
6	AD Administration, address, telephone, telefax, AFS	Post:Budapest Airport Zrt. H-1185 Budapest, BUD International Airport Phone:(+361) 296-7421 Fax:(+361) 296-6890 AFS:LHBPYDYG Email:airport.ops@bud.hu
7	Types of traffic permitted (IFR/VFR)	IFR-VFR
8	Remarks	Nil

LHBP AD 2.3 OPERATIONAL HOURS

1	AD Administration	H24
2	Customs and immigration	H24
3	Health and sanitation	H24
4	AIS Briefing Office	H24
5	ATS Reporting Office (ARO)	H24
6	MET Briefing Office	H24 See AD 2-LHBP AD-2.11 and See GEN 3.5
7	ATS	H24 Night restrictions See AD 2-LHBP AD-2.21
8	Fuelling	H24
9	Handling	H24
10	Security	H24
11	De-icing	H24
12	Remarks	Nil

LHBP AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Trucks (1,5-3,5 tonnes), fork lifts (up to 5 tonnes), conveyor belts, high loader (up to 20 tonnes).
2	Fuel/oil types	Jet A-1 kerosene, (NATO code F-35), MK8P and MOBIL Jet engine oil., FH15 and CHEVRON HYJET IV.
3	Fuelling facilities/capacity	Air BP senior representative Castrol Hungary KFT.: Phone:(+361) 296-6017 Phone:(+3630) 9335-319 Fax:(+361) 296-6017 Sales Manager Airport Fuel Supply LLC Phone:(+361) 296-6008 Phone:(+3620) 4931-039 Fax:(+361) 294-4215
4	De-icing facilities	AVBL on parking stands on request
5	Hangar space for visiting aircraft	Limited by prior arrangement only
6	Repair facilities for visiting aircraft	Aeroplex: Email:marketingkozpont@aeroplex.com Lufthansa Technik Budapest Phone:(+361) 296-3004 Fax:(+361) 296-3001
7	Remarks	Nil

LHBP AD 2.5 PASSENGER FACILITIES

1	Hotels	In the city
2	Restaurants	at AD and in the city
3	Transportation	Buses, taxis, car hire (Hertz, Avis, Budget) and airport minibus services (Phone: 296-8555)
4	Medical facilities	First aid at AD, hospitals in the city
5	Bank and Post Office	OTP T2B open: 07:45-17:00 LT Post: T2A: open 08:00-15:30 LT
6	Tourist Office	T2B: OTP Travel open: 06:00-2200 LT T2A: Neckermann, Uhuvilla
7	Remarks	Money exchange: 05:30-22:00 LT Cash machines: H24

LHBP AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	A9
2	Rescue equipment	Available
3	Capability for removal of disabled aircraft	Lifting bags and hydraulic jacks available

3. AUTOMATIC TERMINAL INFORMATION SERVICE (ATIS) BROADCASTS

Station	Call sign/Identification	Frequency (MHz)	Operational Hours	Remark
Budapest	BUDAPEST TERMINAL INFORMATION	132.375	H24	
		117.3	H24	BUD TVOR

3.1 The content of ATIS broadcasts:

1. Name of aerodrome
2. Designator
3. Time of observation
4. Type of approach to be expected and runway(s) in use
5. Significant runway surface conditions and if appropriate braking action; conditions of other movement areas
6. Expected delay, if appropriate
7. Transition level
8. Other essential operational information
9. Meteorological report
10. ATFM information

Pilots of arriving and departing aircraft are requested to report receipt of ATIS broadcast by reading back relevant designator of information and QNH on initial contact with Budapest Approach or Budapest Ground respectively.

Notes:

- One broadcast is serving both arriving and departing aircraft.
- Runway braking action is reported with friction coefficient, or estimated braking action if friction coefficient is not available. It is transmitted for each third of the runway in use commencing from the threshold. Sections of the runway are identified as first part, second part, and third part.
- RVR values are transmitted in the following order: touchdown zone, mid point and stop end. When RVRs for all the three positions are available, the positions are not identified.

4. BIRD FLOCKS AND BIRD MIGRATIONS

The size of flocks of birds living at or near Budapest Liszt Ferenc International Airport varies with seasons.

Domestic pigeons bred at settlements in the vicinity of the airport represent a constant and growing threat. Appearance of a flock comprising 50 to 100 individuals can be expected from every direction between 30 and 100 feet.

About 40 to 60 birds of prey live within the area or in the immediate vicinity of the airport. Birds of prey are a hazard to aircraft in the initial climb or final approach phase of flight.

Danger of collision somewhat increases in June- August when the new generation leave their nests.

Bird migrations occur, depending on weather conditions, in February-March and in September-October. In these months flocks of several thousand, relatively small, birds will migrate through the airspace at varying altitudes.

Between November and February gulls also appear at the airport, usually preferring to settle on runways and taxiways.

Particular mention must be made of black and grey crows. Between October and March - also depending on weather conditions - they migrate through the airspace of the airport in flocks of several ten thousand, sometimes of several hundred thousand, and settle temporarily on the airfield.

Their migration shows a distinct daily pattern: after dawn they fly from NW to SE, at dusk from SE to NW, between 30 and 1000 feet.

4.1 Bird Watch and Scaring Service

The Budapest Airport Zrt. operates a continuous bird watch and scaring service, with adequate equipment.

Operators using Budapest Liszt Ferenc International Airport are requested to send their comments relating to the operation of this service to the following address:

Airside Management

BUD International Airport Zrt.

Post:H-1185 Budapest, BUD International Airport

Phone:(361) 296-5535

Fax:(361) 296-8981

Email:airside.bud@bud.hu

4.2 Reporting a Bird Strike

Operators using Budapest Liszt Ferenc International Airport are requested to report events of bird strike by filling in the ICAO standard "BIRD STRIKE REPORTING FORM" (BSRF). The form can be obtained - and filed - at the Air Traffic Services Reporting Office.

If the event occurs after take-off and the crew do not consider it necessary to interrupt their flight, then they should notify the TWR via radio, then fill in the BSRF at their destination airport and send it to the following address:

Airside Management

BUD International Airport Zrt.

Post:H-1185 Budapest, BUD International Airport

Fax:(361) 296-8981

Email:airside.bud@bud.hu

5. GENERAL AVIATION FLIGHT HANDLING

An operator or a handling agent authorized by the operator must advise its operation as a minimum three hours before the planned arrival or departure time. Requests shall be submitted to the Airport Operations Control Center by:

Email:airport.ops@bud.hu

Operation request shall comprise the following information:

- date of flight;
- aircraft identification and type of aircraft;
- type of flight;
- estimated time of arrival and/or departure;
- aerodrome of departure and destination;
- aircraft registration;
- name of the handling agent;
- MTOW and noise data of the aircraft;
- name of the operator.



The airport operator will confirm the times to the sender.

AIP HUNGARY

INSTRUMENT APPROACH CHART - ICAO
AERODROME ELEV 422
HEIGHTS RELATED TO THR RWY 30 - ELEV 426

PÉR INFO 129.900
BUDAPEST INFO (WEST) 125.500

GYŐR/PÉR
ILS or LOC RWY 30
(ACFT CAT A, B, C)

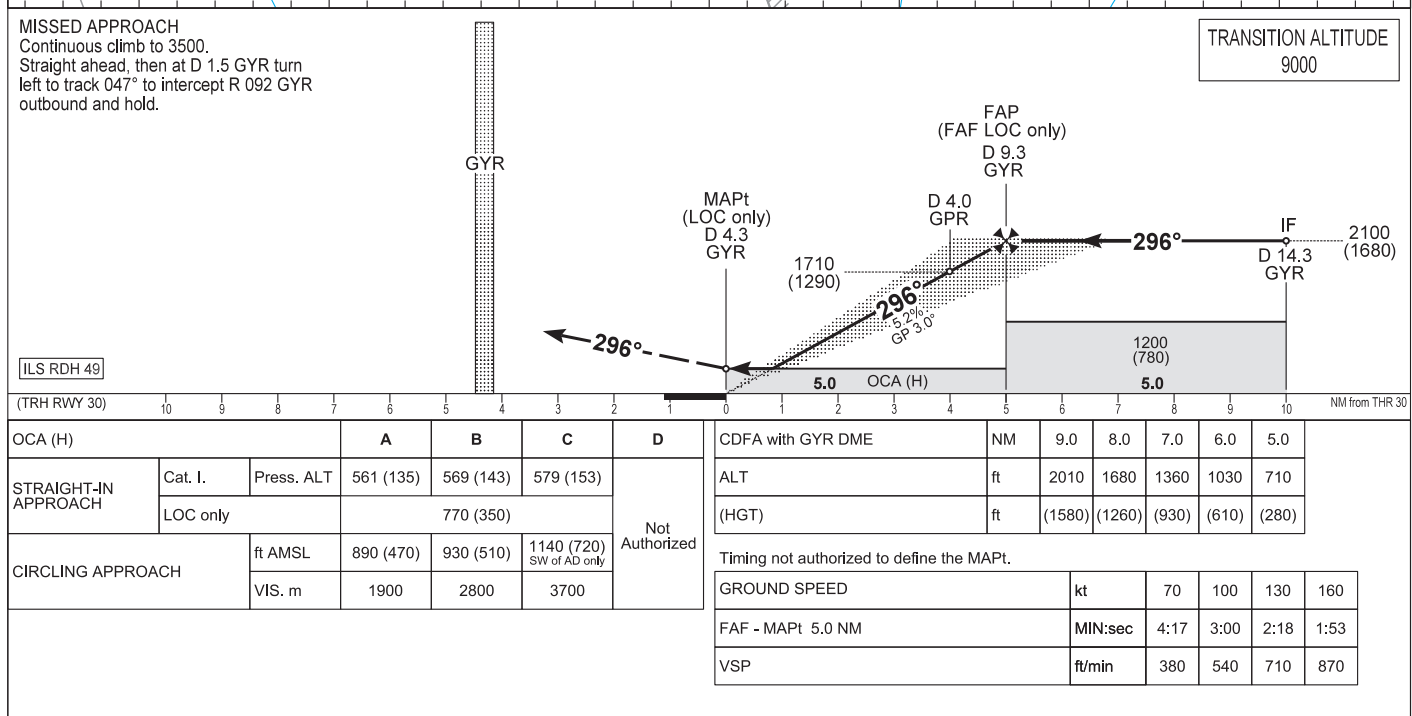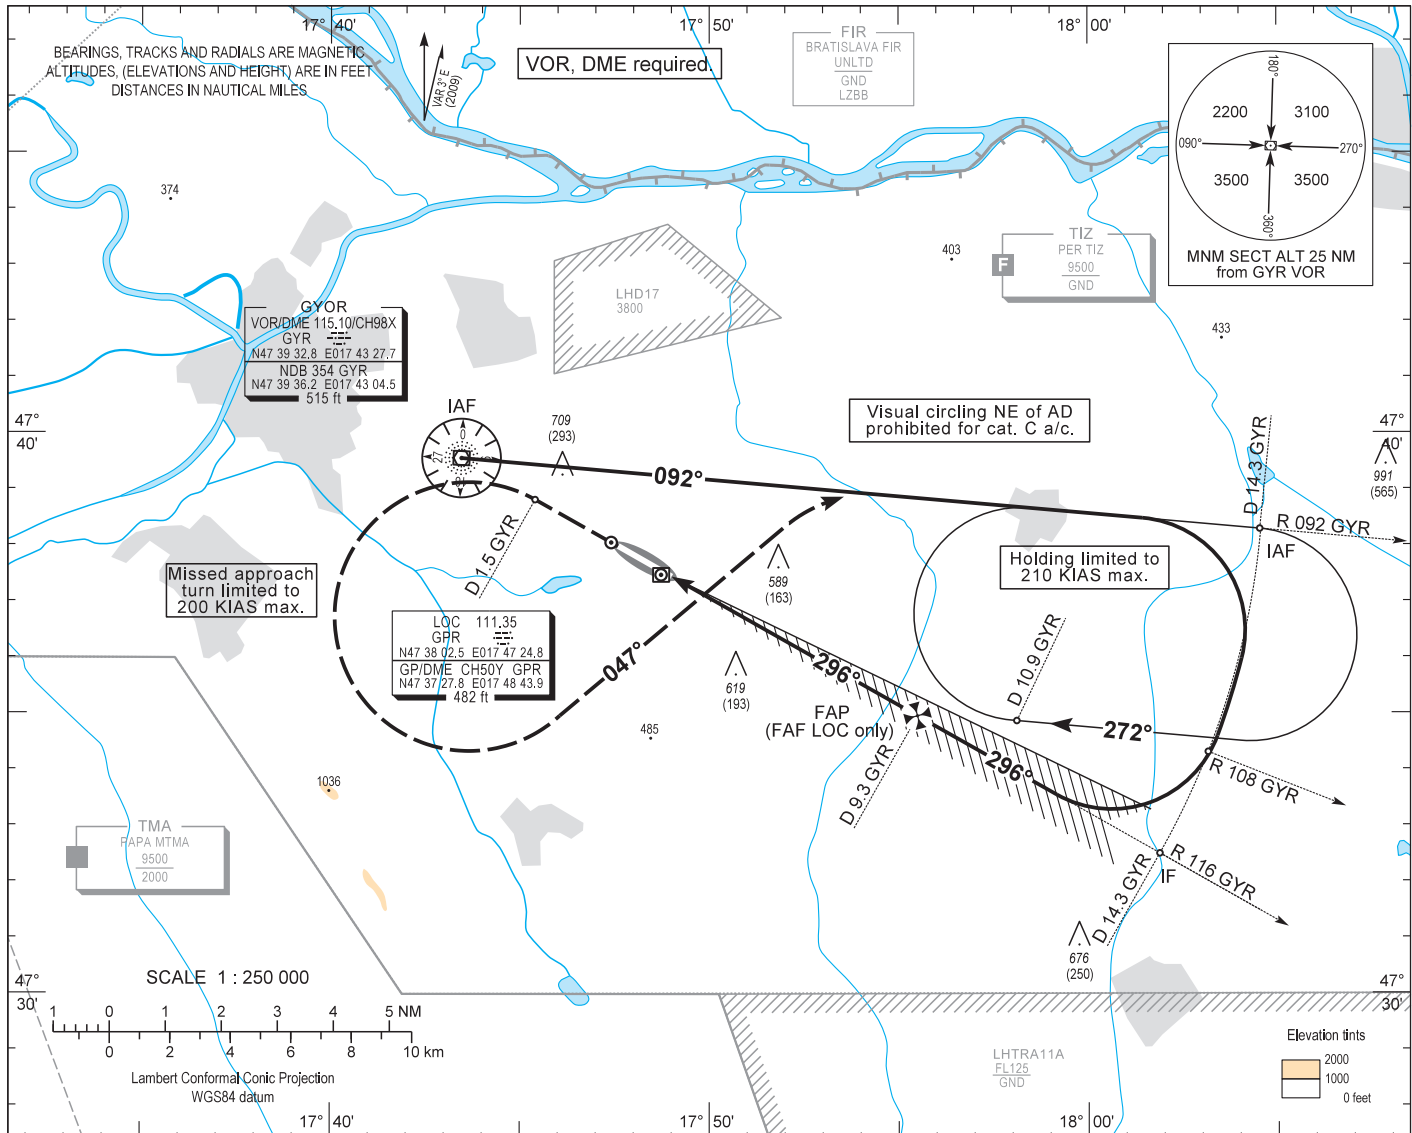

AD 2 LHPR INSTRUMENT APPROACH CHART ILS OR LOC RWY 30

FIX	LATITUDE	LONGITUDE	FIX FORMATION (True BRGs)
IAF	N47 39 32.8	E017 43 27.7	GYR VOR
IAF	N47 38 17.1	E018 04 32.0	R 95.00 GYR VOR / D 14.23 GYR DME
IF	N47 32 30.2	E018 01 51.4	R 299.46 GYR VOR / D 14.25 GYR DME
FAP	N47 34 57.3	E017 55 28.6	R 299.46 GPR LOC / D 9.40 GYR DME
FAF LOC only	N47 34 58.2	E017 55 26.1	R 299.46 GPR LOC / D 9.30 GYR DME
MAPt LOC only	N47 37 25.9	E017 49 00.0	R 299.46 GYR VOR / D 4.30 GYR DME
MA TP	N47 38 48.4	E017 45 23.7	R 299.46 GYR VOR / D 1.50 GYR DME

Final approach descent (LOC only): 3.06°

Approach holding procedure:

Holding fix: GYR VOR R 092 / D 14.3.


Maximum speed: 210 KIAS
 Inbound track: 092°
 Outbound track: 272°
 Turns: Right
 Outbound timing: 1 min.
 Minimum holding altitude: 4500 (3500 for Missed Approach)
 MOCA: 2000
 Entry: Sector 1 (parallel) and Sector 2 (offset) entries prohibited

AIP HUNGARY

INSTRUMENT APPROACH CHART - ICAO
AERODROME ELEV 422
HEIGHTS RELATED TO THR RWY 30 - ELEV 426


PÉR INFO 129.900
BUDAPEST INFO (WEST) 125.500

GYŐR/PÉR
VOR RWY 30
(ACFT CAT A, B, C)

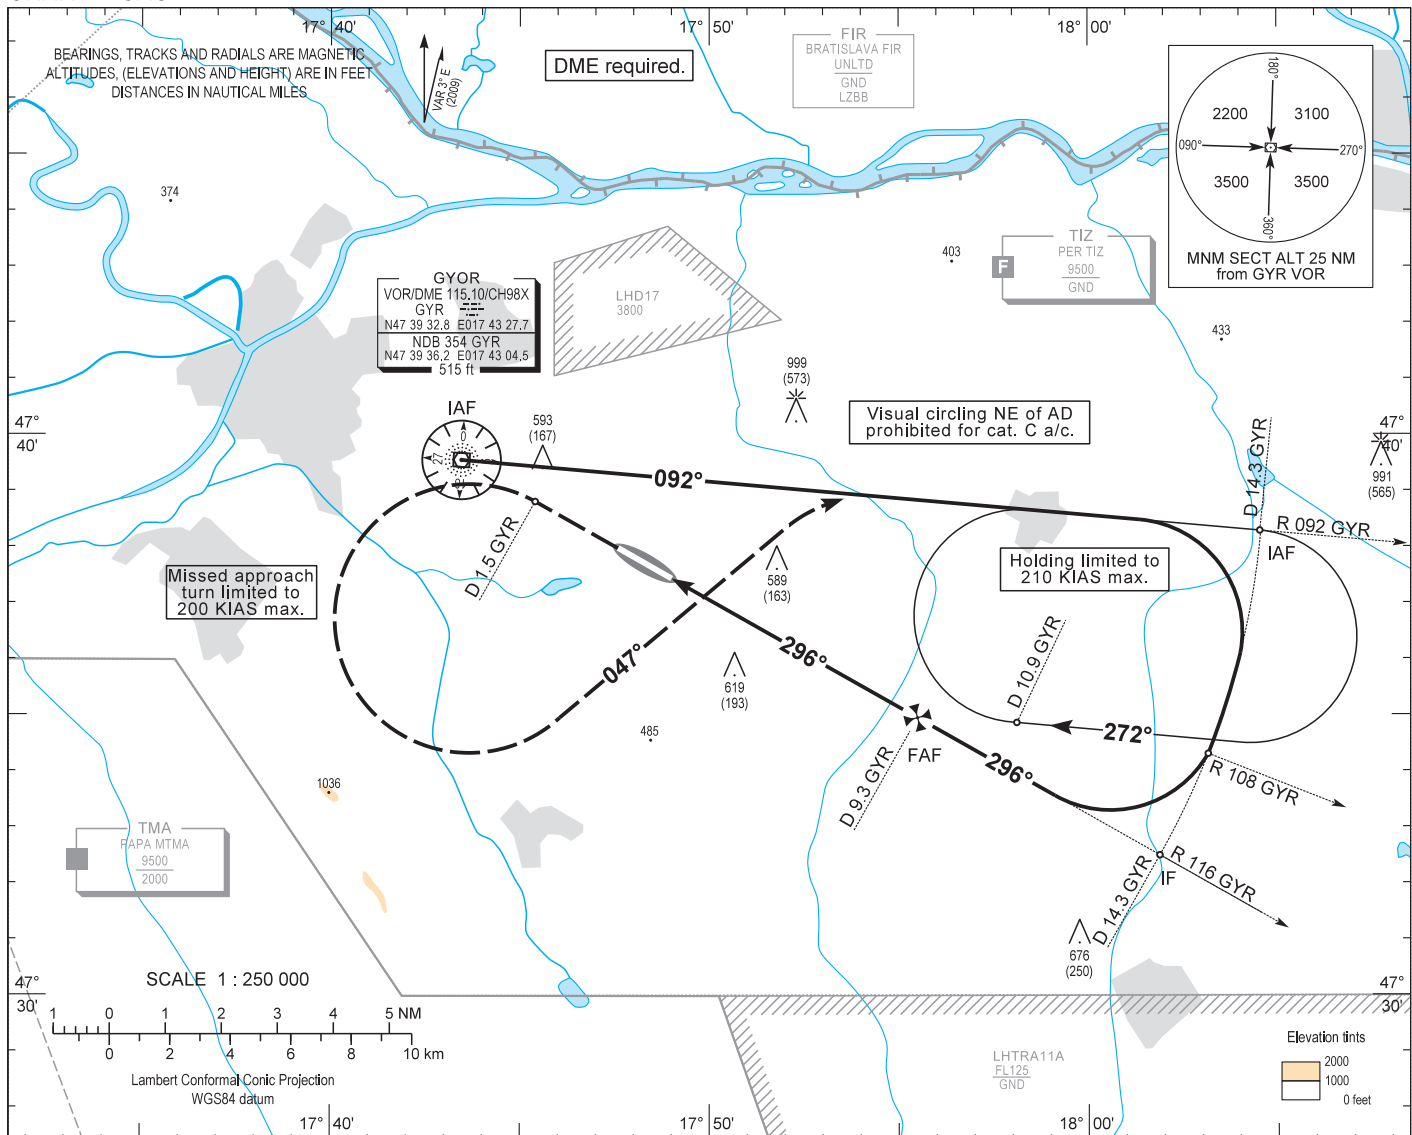

MISSED APPROACH
Continuous climb to 3500.
Straight ahead, then at D 1.5 GYR turn left (200 KIAS max.) to track 047° to intercept R 092 GYR outbound and hold.

TRANSITION ALTITUDE
9000

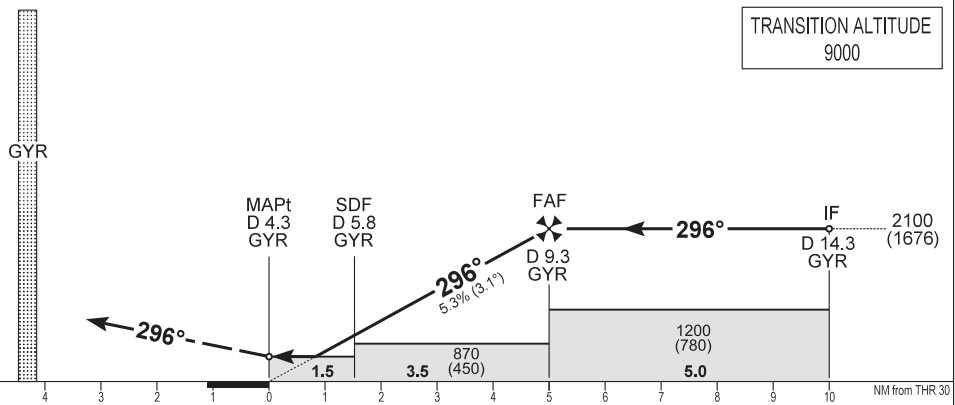

(THR RWY 30)		10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	NM from THR 30	
OCA (H)		A		B		C		D		CDFA with GYR DME		NM	9.0	8.0	7.0	6.0								
STRAIGHT-IN APPROACH		VOR		790 (370)		ALT		ft		2010	1680	1360	1030											
CIRCLING APPROACH		ft AMSL		890 (470)	930 (510)	1140 (720) SW of AD only	Not Authorized		(HGT)		ft	(1580)	(1260)	(940)	(610)									
		VIS. m		1900	2800	3700			Timing not authorized to define the MAPt.		GROUND SPEED		kt	70	100	130	160							
										FAF - MAPt 5.0 NM		MIN:sec	4:17	3:00	2:18	1:53								
										VSP		ft/min	380	540	710	870								

AD 2 LHPR INSTRUMENT APPROACH CHART VOR RWY 30

FIX	LATITUDE	LONGITUDE	FIX FORMATION (True BRGs)
IAF	N47 39 32.8	E017 43 27.7	GYR VOR
IAF	N47 38 17.1	E018 04 32.0	R 95.00 GYR VOR / D 14.23 GYR DME
IF	N47 32 30.2	E018 01 51.4	R 299.46 GYR VOR / D 14.25 GYR DME
FAF	N47 34 58.2	E017 55 26.1	R 299.46 GYR VOR / D 9.51 GYR DME
SDF	N47 36 41.9	E017 50 55.8	R 299.46 GYR VOR / D 5.80 GYR DME
MAPt	N47 37 25.9	E017 49 00.0	R 299.46 GYR VOR / D 4.30 GYR DME
MA TP	N47 38 48.4	E017 45 23.7	R 299.46 GYR VOR / D 1.5 GYR DME

Final approach descent: 3.06°

Approach holding procedure:

Holding fix: GYR VOR R 092 / D 14.3.


Maximum speed: 210 KIAS
 Inbound track: 092°
 Outbound track: 272°
 Turns: Right
 Outbound timing: 1 min.
 Minimum holding altitude: 4500 (3500 for Missed Approach)
 MOCA: 2000
 Entry: Sector 1 (parallel) and Sector 2 (offset) entries prohibited

AIP HUNGARY

INSTRUMENT APPROACH CHART - ICAO
AERODROME ELEV 422
HEIGHTS RELATED TO THR RWY 12 - ELEV 415


PÉR INFO 129.900
BUDAPEST INFO (WEST) 125.500

GYŐR/PÉR
RNAV^(GNSS) RWY 12
(ACFT CAT A, B, C)

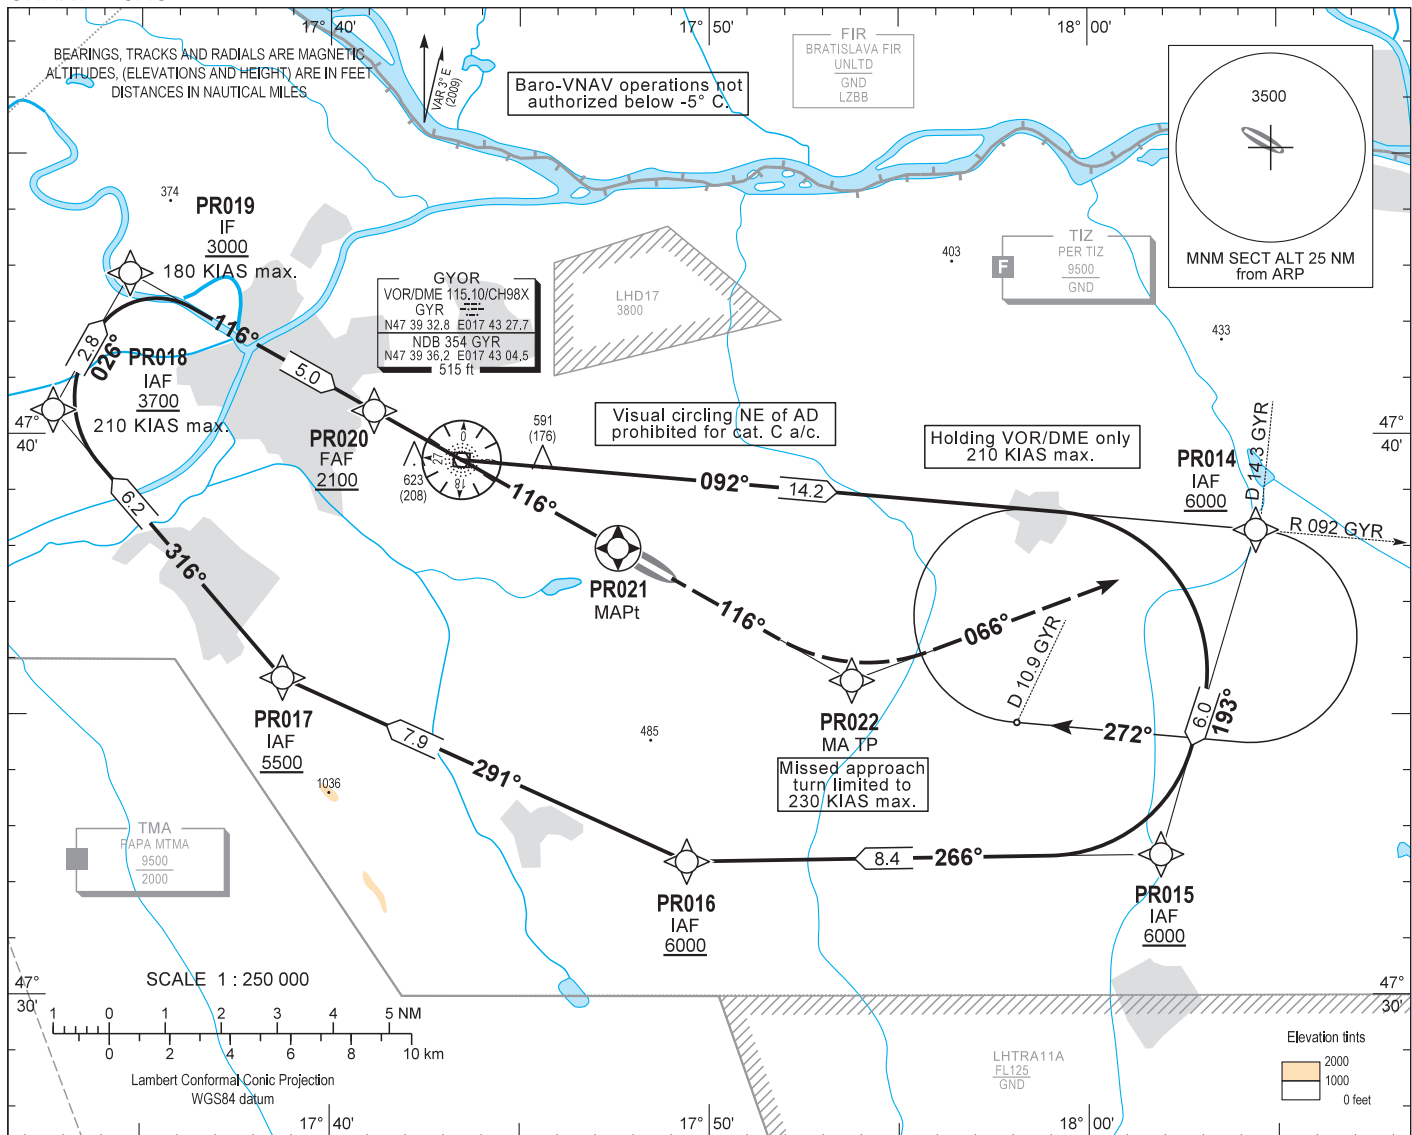

TRANSITION ALTITUDE 9000

MISSED APPROACH
Continuous climb to 3500.
Straight ahead to PR022 then turn left (230 KIAS max.) to track 066° to PR014 and hold.

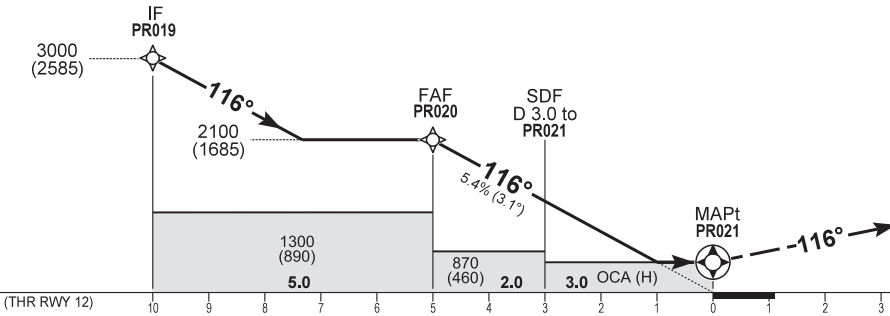

OCA (H)		A	B	C	D	CDFA with distance to PR021							
						NM	5.0	4.0	3.0	2.0	1.0		
STRAIGHT-IN APPROACH	LNAV	770 (360)				Not Authorized	ALT	ft	2100	1780	1460	1130	810
	LNAV / VNAV	730 (320)					(HGT)	ft	(1690)	(1370)	(1050)	(720)	(400)
CIRCLING APPROACH	ft AMSL	890 (480)	930 (520)	1140 (730) SW of AD only		Timing not authorized to define the MAPt.							
	VIS. m	1900	2800	3700		GROUND SPEED	kt	70	100	130	160		
							FAF - MAPt 5.0 NM	MIN:sec	4:17	3:00	2:18	1:53	
							VSP	ft/min	380	540	710	870	

AD 2 LHPR INSTRUMENT APPROACH CHART RNAV_(GNSS) RWY 12

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M (°T)	Magnetic Variation (2009)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	VPA/TCH	Navigation Specification
001	IF	GYR			+3.4			+6000			RNP APCH
002	TF	PR014	-	092 (095.0)	+3.4	14.2	-	+6000			RNP APCH
003	TF	PR015	-	193 (196.6)	+3.4	6.0	-	+6000			RNP APCH
004	TF	PR016	-	266 (269.1)	+3.4	8.4	-	+6000			RNP APCH
005	TF	PR017	-	291 (294.5)	+3.4	7.9	-	+5500			RNP APCH
006	TF	PR018	-	316 (319.5)	+3.4	6.2	-	+3700	-210		RNP APCH
007	TF	PR019	-	026 (029.5)	+3.4	2.8	-	+3000	-180		RNP APCH
008	TF	PR020	-	116 (119.5)	+3.4	5.0	-	@2100			RNP APCH
009	TF	PR021	Y	116 (119.5)	+3.4	5.0	-	@770		-3.08/49	RNP APCH
010	TF	PR022	-	116 (119.5)	+3.4	4.8	-	-	-230		RNP APCH
011	HM	PR014	-	066 (069.5)	+3.4	7.7	-	+3500			RNP APCH

**WAYPOINT COORDINATES
AD 2-LHPR-RNAV_(GNSS) 12**


WAYPOINT	LATITUDE	LONGITUDE	REMARK
PR014	N47 38 17.4	E018 04 25.7	IAF
PR015	N47 32 30.2	E018 01 54.4	IAF
PR016	N47 32 22.9	E017 49 24.5	IAF
PR017	N47 35 39.3	E017 38 44.7	IAF
PR018	N47 40 25.6	E017 32 40.2	IAF
PR019	N47 42 52.1	E017 34 41.8	IF
PR020	N47 40 25.3	E017 41 09.0	FAF
PR021	N47 37 58.3	E017 47 35.6	MAPt
PR022	N47 35 36.7	E017 53 45.6	MA TP

AIP HUNGARY


INSTRUMENT APPROACH CHART - ICAO
AERODROME ELEV 422
HEIGHTS RELATED TO THR RWY 30 - ELEV 426

PÉR INFO 129.900
BUDAPEST INFO (WEST) 125.500

GYŐR/PÉR
RNAV^(GNSS) RWY 30
(ACFT CAT A, B, C)

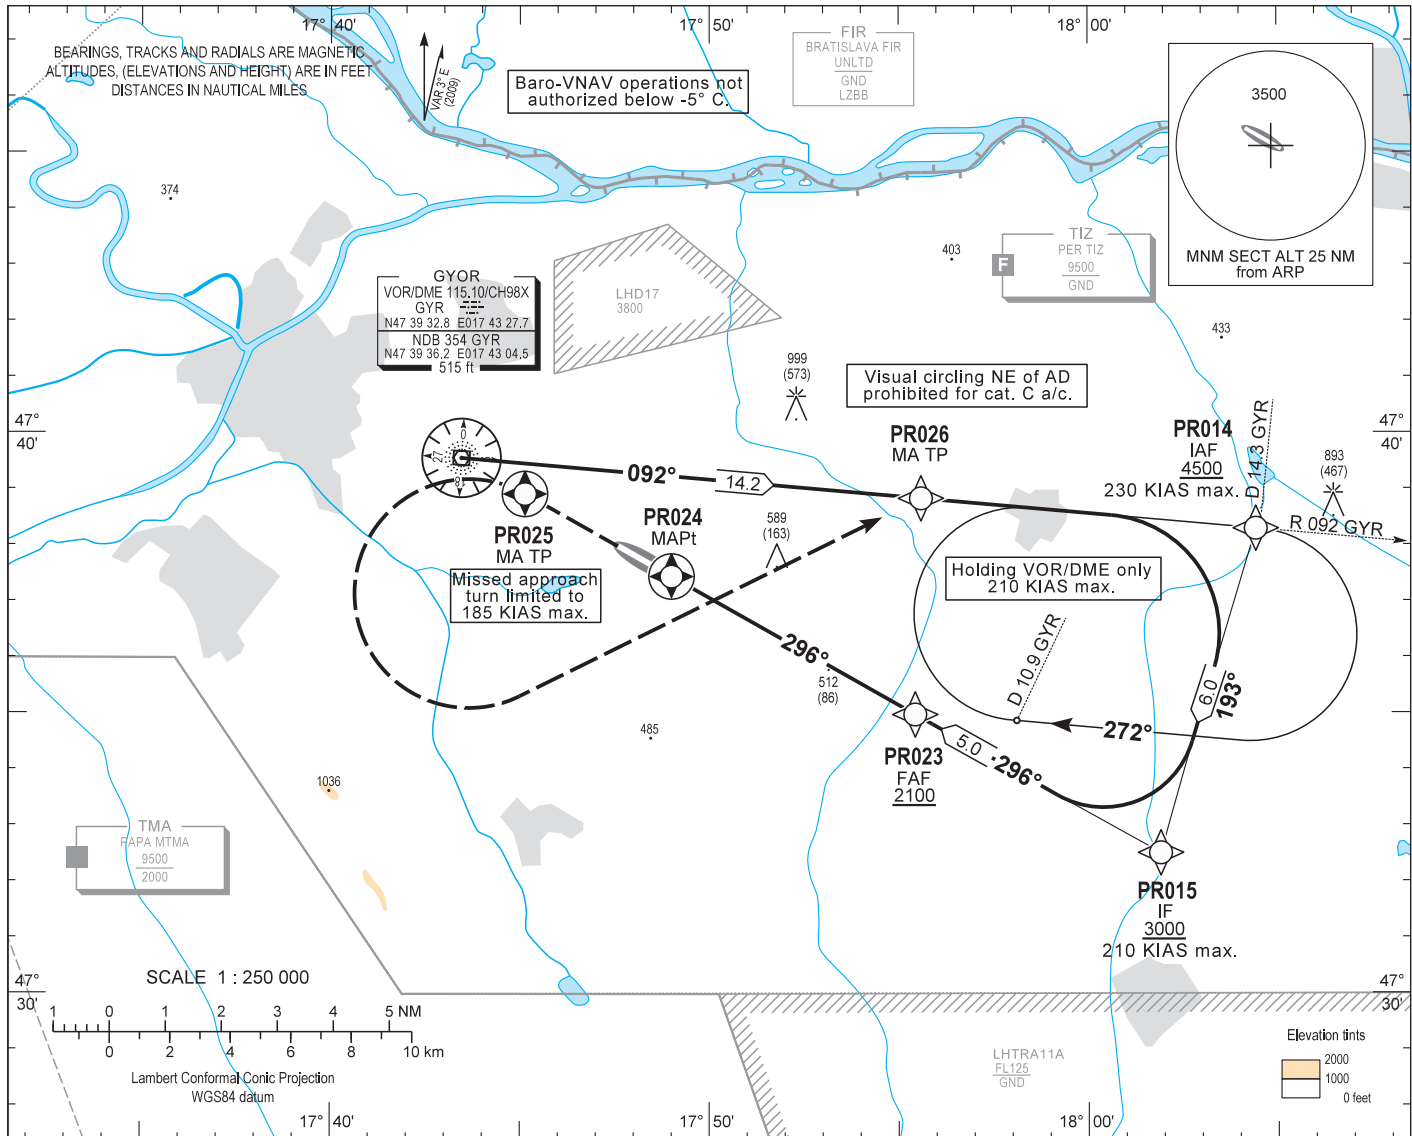

MISSED APPROACH
Continuous climb to 3500.
Straight ahead to PR025 then turn left direct (185 KIAS max.) to PR026 then turn right to track 092° to PR014 and hold.

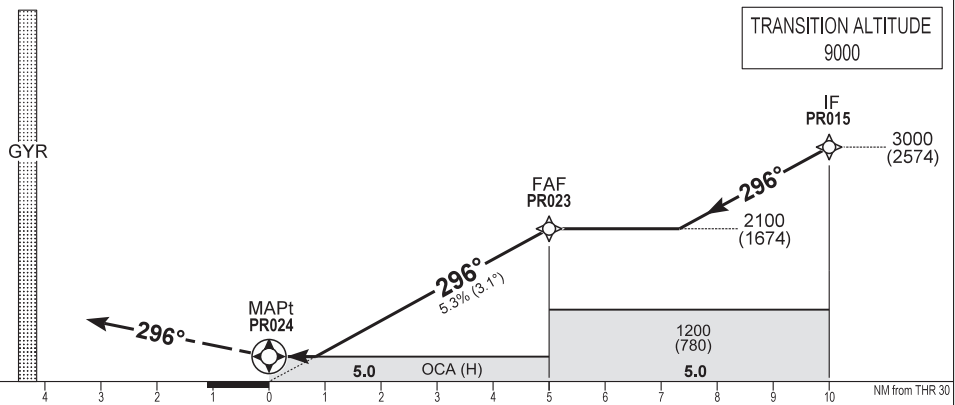

OCA (H)		A	B	C	D
STRAIGHT-IN APPROACH	LNAV	770 (350)			Not Authorized
	LNAV / VNAV	730 (310)			
CIRCLING APPROACH	ft AMSL	890 (470)	930 (510)	1140 (720) SW of AD only	Not Authorized
	VIS. m	1900	2800	3700	

CDFA with PR024	NM	5.0	4.0	3.0	2.0	1.0
ALT	ft	2100	1780	1460	1130	810
(HGT)	ft	(1680)	(1360)	(1040)	(710)	(390)
Timing not authorized to define the MAPt.						
GROUND SPEED	kt	70	100	130	160	
FAF - MAPt 5.0 NM	MIN:sec	4:17	3:00	2:18	1:53	
VSP	ft/min	380	540	710	870	

AD 2 LHPR INSTRUMENT APPROACH CHART RNAV_(GNSS) RWY 30

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M (°T)	Magnetic Variation (2009)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	VPA/TCH	Navigation Specification
001	IF	GYR			+3.4						RNP APCH
002	TF	PR014	-	092 (095.0)	+3.4	14.2	-	+4500	-230		RNP APCH
003	TF	PR015	-	193 (196.6)	+3.4	6.0	-	+3000	-210		RNP APCH
004	TF	PR023	-	296 (299.5)	+3.4	5.0	-	@2100			RNP APCH
005	TF	PR024	Y	296 (299.5)	+3.4	5.0	-	@770		-3.06/49	RNP APCH
006	DF	PR025	Y	296 (299.5)	+3.4	3	-	-	-185		RNP APCH
007	DF	PR026	-	-	+3.4	-	-	-			RNP APCH
008	HM	PR014	-	092 (095.0)	+3.4	6.0	-	+3500			RNP APCH

**WAYPOINT COORDINATES
AD 2-LHPR-RNAV_(GNSS) 30**

WAYPOINT	LATITUDE	LONGITUDE	REMARK
PR014	N47 38 17.4	E018 04 25.7	IAF
PR015	N47 32 30.2	E018 01 54.4	IF
PR023	N47 34 58.2	E017 55 26.1	FAF
PR024	N47 37 26.0	E017 49 00.3	MAPt
PR025	N47 38 54.3	E017 45 08.2	MA TP
PR026	N47 38 49.6	E017 55 35.4	MA TP


AIP HUNGARY

STANDARD DEPARTURE CHART -
INSTRUMENT (SID) -
ICAO

TRANSITION ALTITUDE
9000

SÁRMELLÉK TOWER 134.575
BALATON INFO 134.575
BUDAPEST INFO (WEST) 125.500

HÉVÍZ/BALATON
RWY 16
NALOX1D SUNOR1D

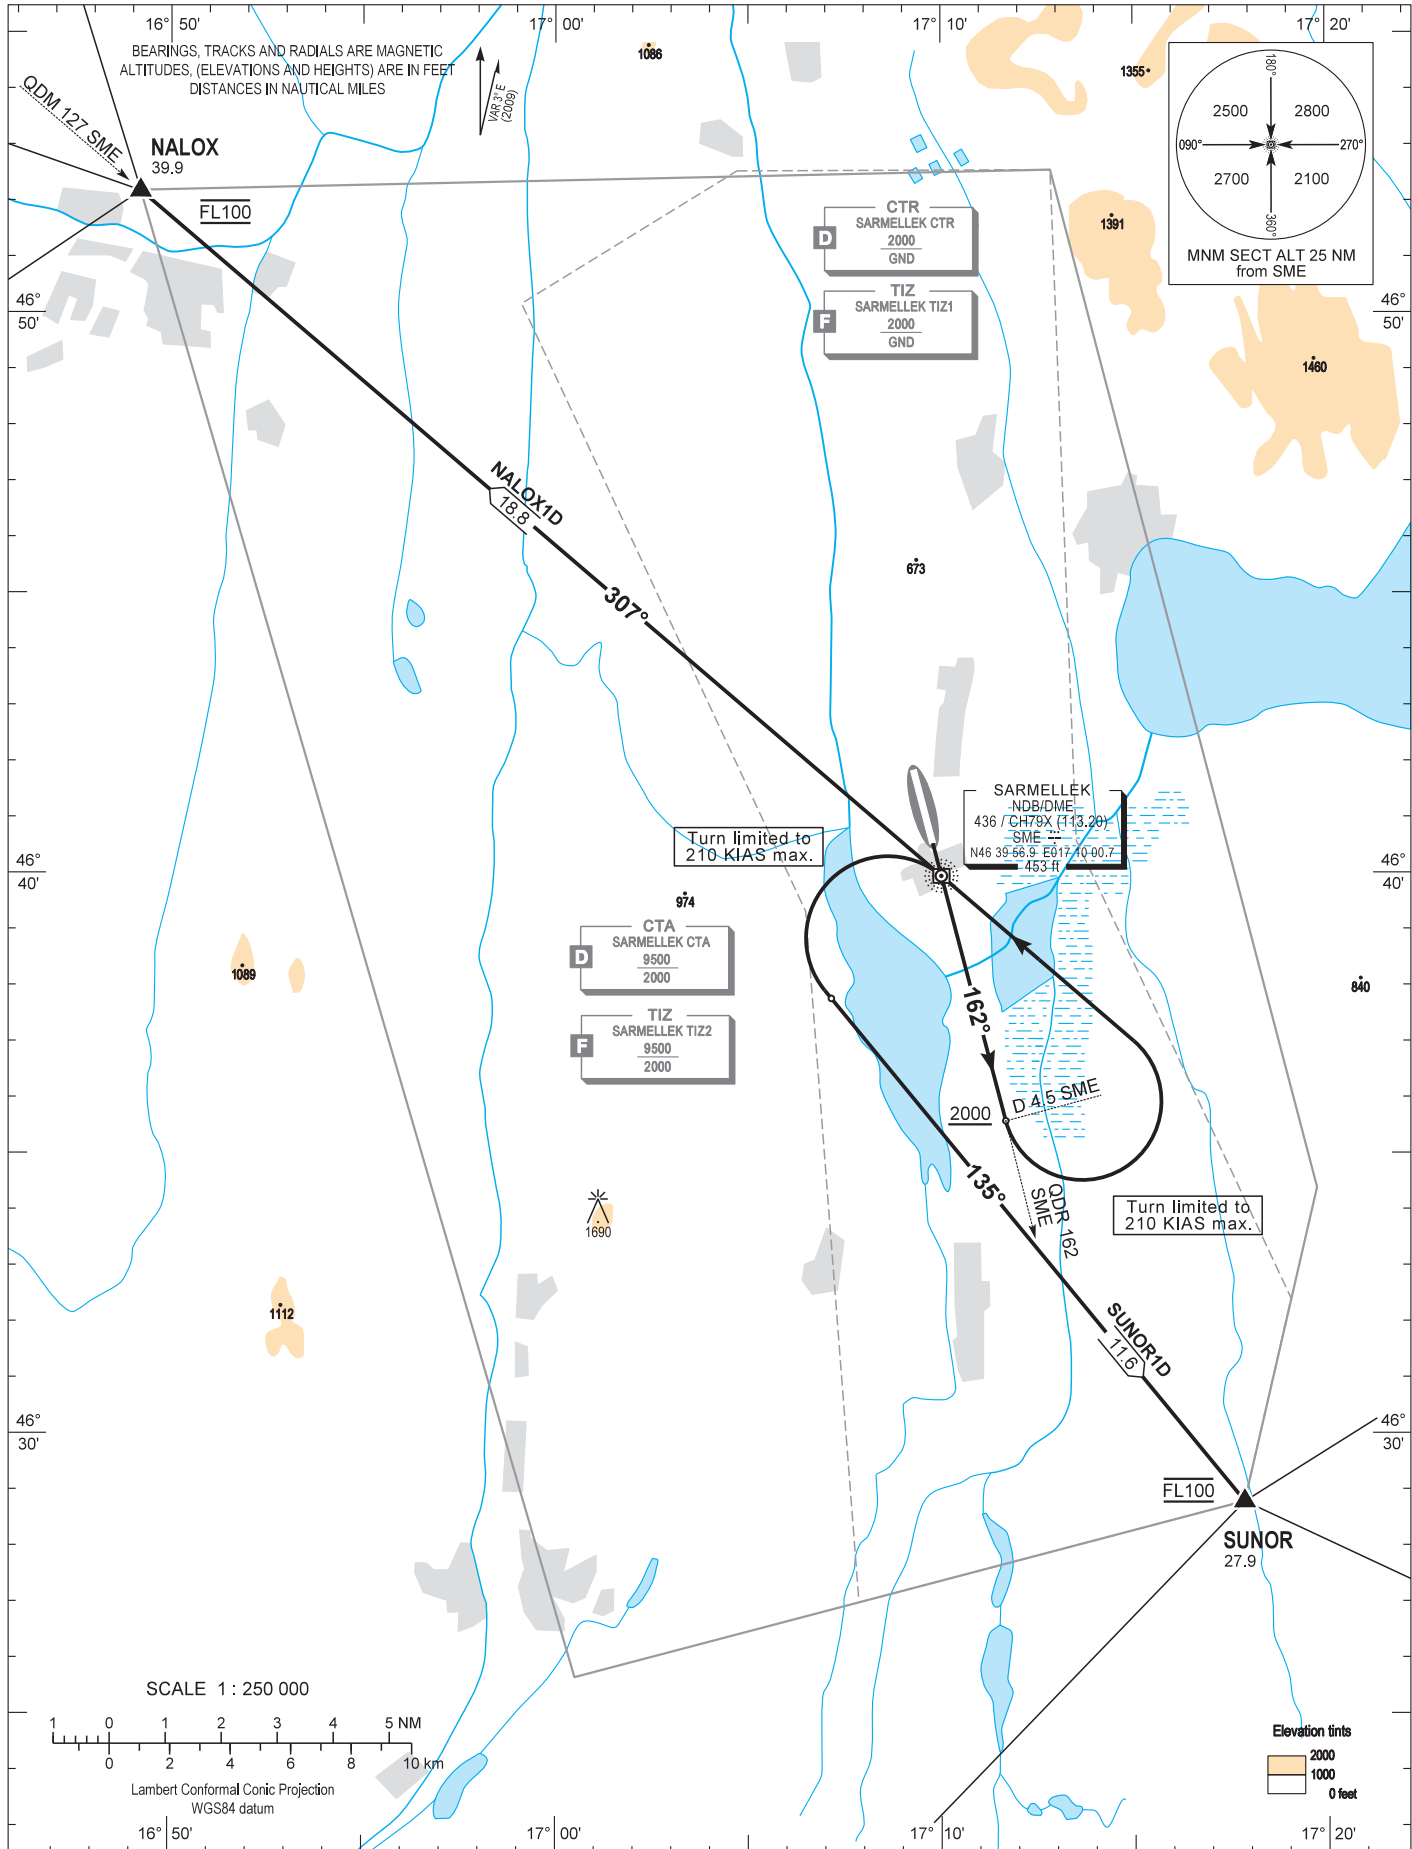

AD 2 LHSM STANDARD DEPARTURE CHART INSTRUMENT RWY 16

NAME	PROCEDURE
NALOX1D (32.1)	After departure continue RWY HDG. Climb to FL100. Cross D 4.5 SME DME at 2000 or above then turn left and proceed direct to SME NDB (Turn limited to 210 KIAS max.) After crossing SME NDB fly on QDR 307 SME NDB proceeding to NALOX. Cross NALOX at FL100.
SUNOR1D (29.5)	After departure continue RWY HDG. Climb to FL100. Cross D 4.5 SME DME at 2000 or above then turn left and proceed direct to SME DME. (Turn limited to 210 KIAS MAX.) After crossing SME NDB turn left to track 135° proceeding to SUNOR. Cross SUNOR at FL100.


AIP HUNGARY

STANDARD DEPARTURE CHART -
INSTRUMENT (SID) -
ICAO

TRANSITION ALTITUDE
9000

SÁRMELLÉK TOWER 134.575
BALATON INFO 134.575
BUDAPEST INFO (WEST) 125.500

HÉVÍZ/BALATON
RWY 34
NALOX3D SUNOR3D

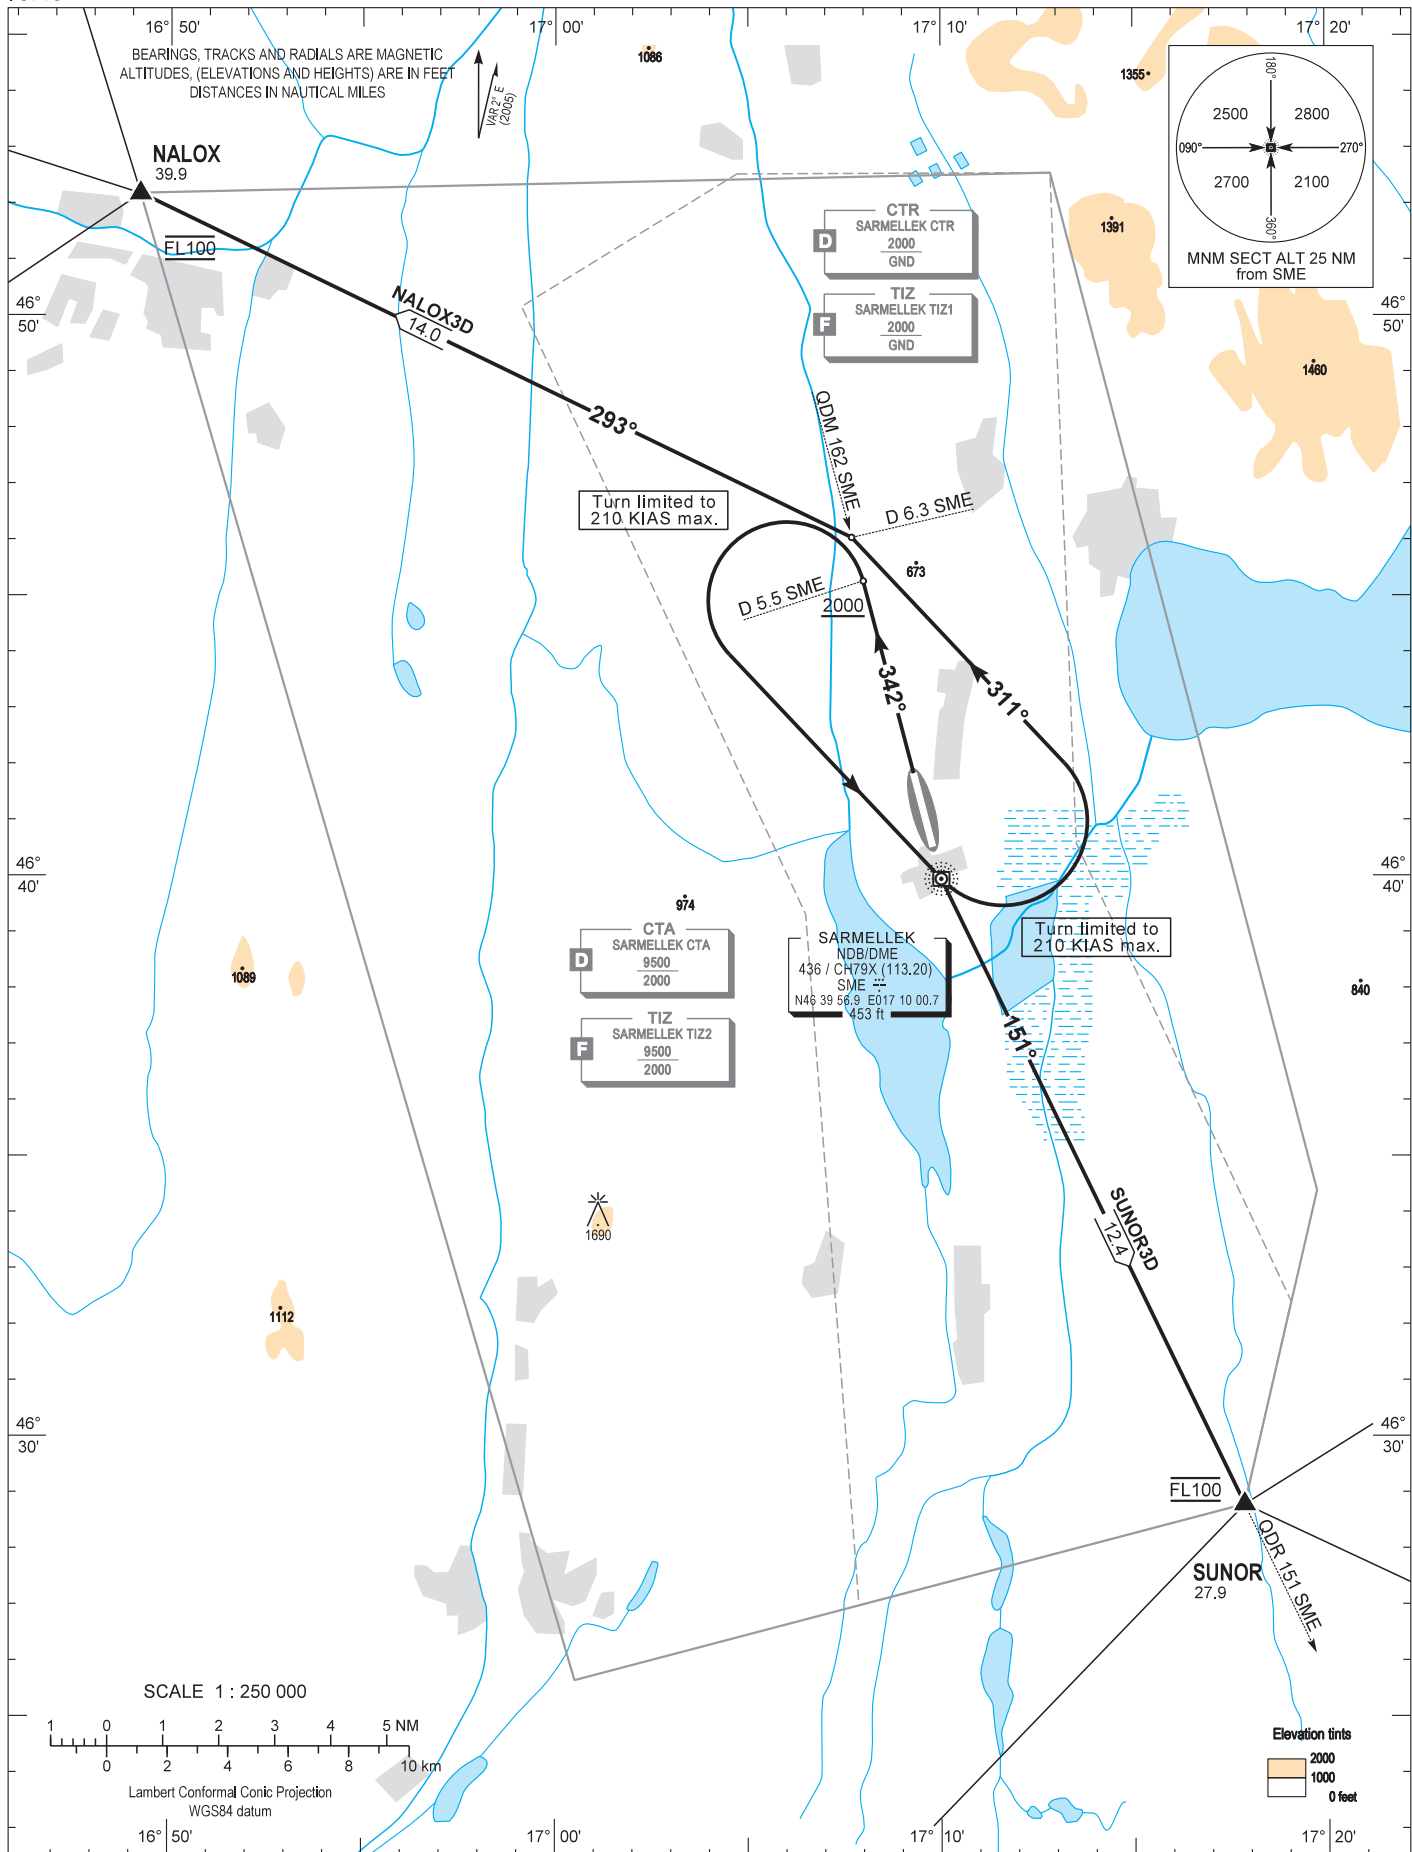

AD 2 LHSM STANDARD DEPARTURE CHART INSTRUMENT RWY 34



NAME	PROCEDURE
NALOX3D (39.9)	After departure continue RWY HDG. Climb to FL100. Cross D 5.5 SME DME at 2000 or above then turn left and proceed direct to SME NDB. (Turn limited to 210 KIAS max.) After crossing SME NDB turn left to track 311°. After crossing QDM 162 SME NDB turn left to track 293° proceeding to NALOX. Cross NALOX at FL100.
SUNOR3D (27.9)	After departure continue RWY HDG. Climb to FL100. Cross D 5.5 SME DME at 2000 or above then turn left and proceed direct to SME NDB. (Turn limited to 210 KIAS max.) After crossing SME NDB fly on QDR 151 SME NDB proceeding to SUNOR. Cross SUNOR at FL100.

AIP HUNGARY

INSTRUMENT APPROACH CHART - ICAO
AERODROME ELEV 408
HEIGHTS RELATED TO THR RWY 16 - ELEV 408

SÁRMELLÉK TOWER 134.575
BALATON INFO 134.575
BUDAPEST INFO (WEST) 125.500

HÉVÍZ/BALATON
ILS or LOC RWY 16
(ACFT CAT A, B, C, D)

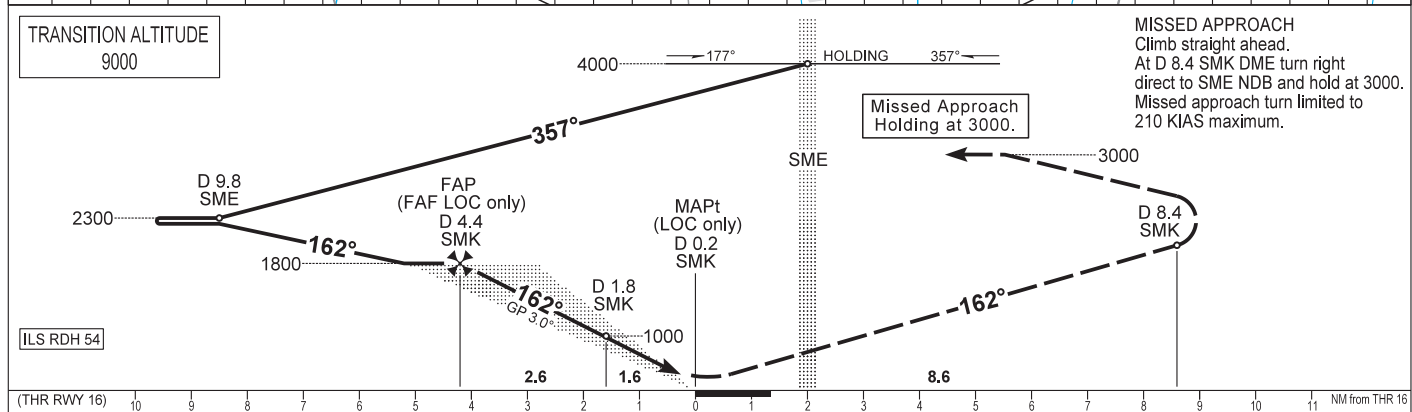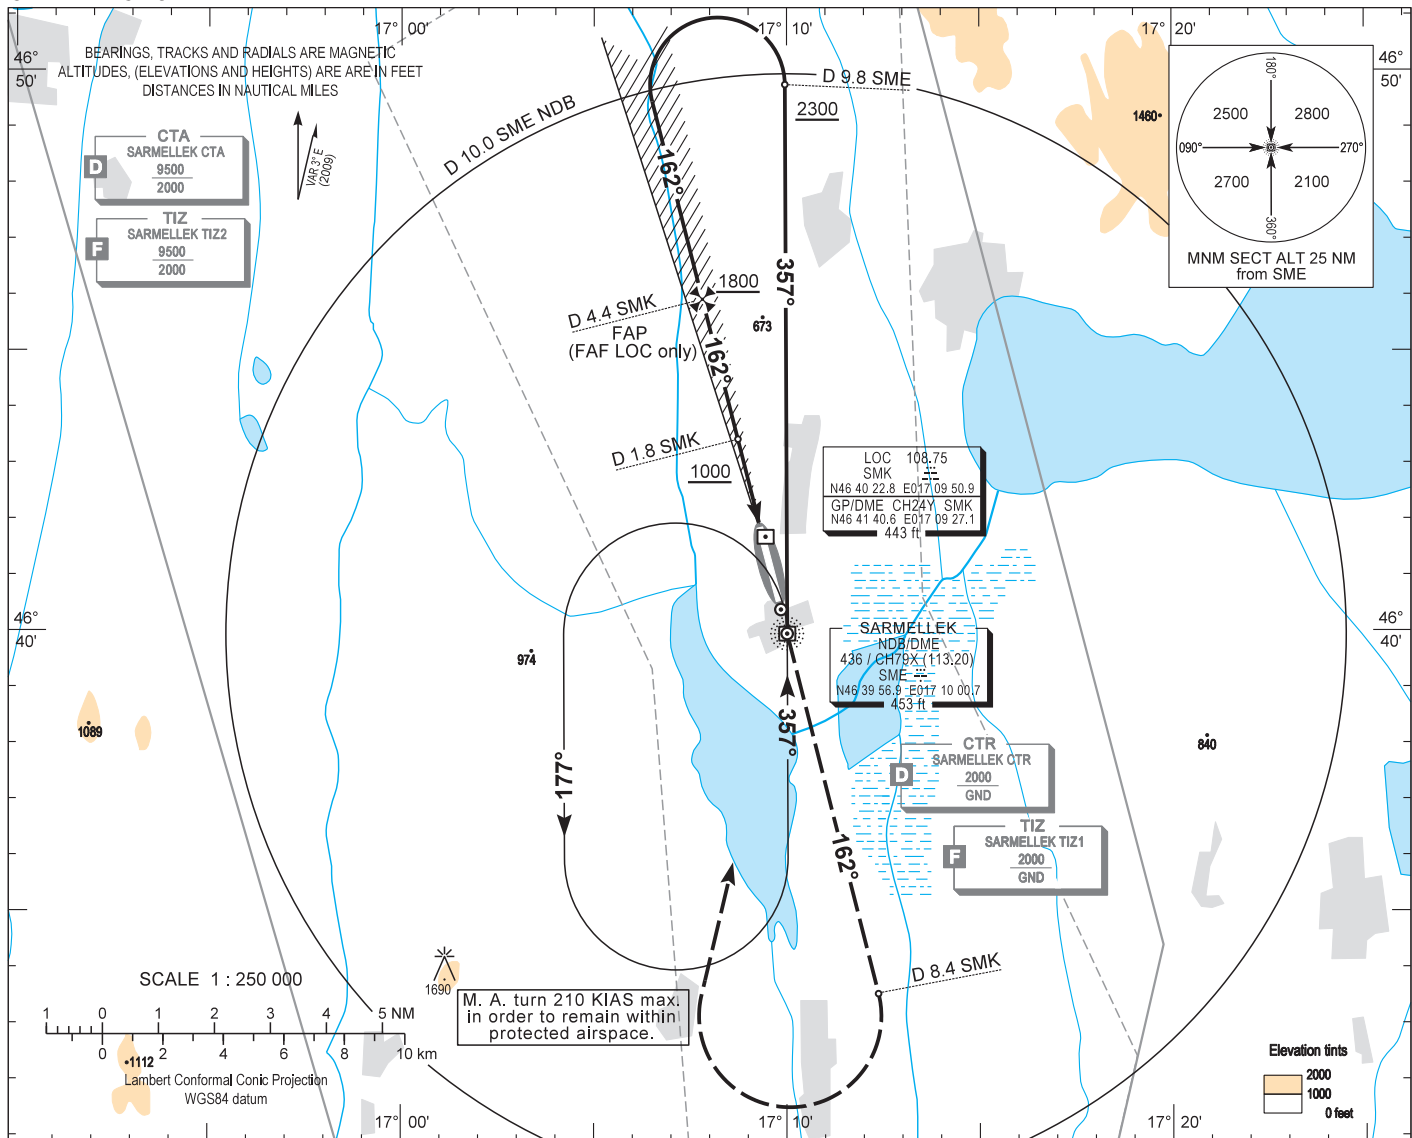

OCA (OCH)		A	B	C	D	GROUND SPEED						
STRAIGHT-IN APPROACH	Cat. I	Press. ALT	540 (130)	550 (140)	560 (150)	570 (160)	kt	60	90	120	150	180
	LOC only		770 (360)				FAP - MAPt 4.22 NM	MIN:sec	4:14	2:49	2:07	1:41
CIRCLING APPROACH		ft AMSL	825	1030	1410	1410						
		VIS. m	1900	2800	3700	4600						

AD 2 LHSM INSTRUMENT APPROACH CHART ILS OR LOC RWY 16

Approach from SME DME:

Initial altitude: 4000.

Fly outbound on 357° for 3 minutes or D 9.8 SME DME (whichever comes first) and descend to 2300.

Turn left (185 KIAS max.) intercept the localizer inbound on 162°, then descend to 1800.

Glide path interception at D 4.4 SMK DME, then follow ILS.

Holding procedure:

Holding fix: SME DME.

Left hand holding pattern.



Inbound track:	357°
Outbound track:	177°
Rate of turn:	3°/sec. or 25° bank angle (whichever requires lesser bank)
Outbound timing:	1 min
Minimum holding altitude:	4000
	3000 for Missed Approach

AIP HUNGARY

INSTRUMENT APPROACH CHART - ICAO
AERODROME ELEV 408
HEIGHTS RELATED TO THR RWY 16 - ELEV 408

SÁRMELLÉK TOWER 134.575
BALATON INFO 134.575
BUDAPEST INFO (WEST) 125.500

HÉVÍZ/BALATON
NDB, RWY 16
(ACFT CAT A, B, C, D)

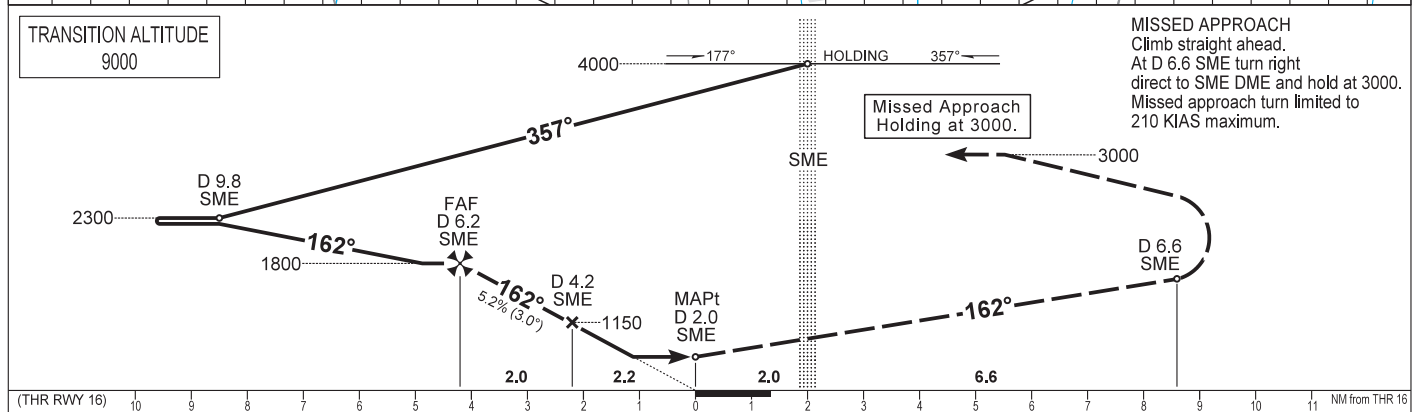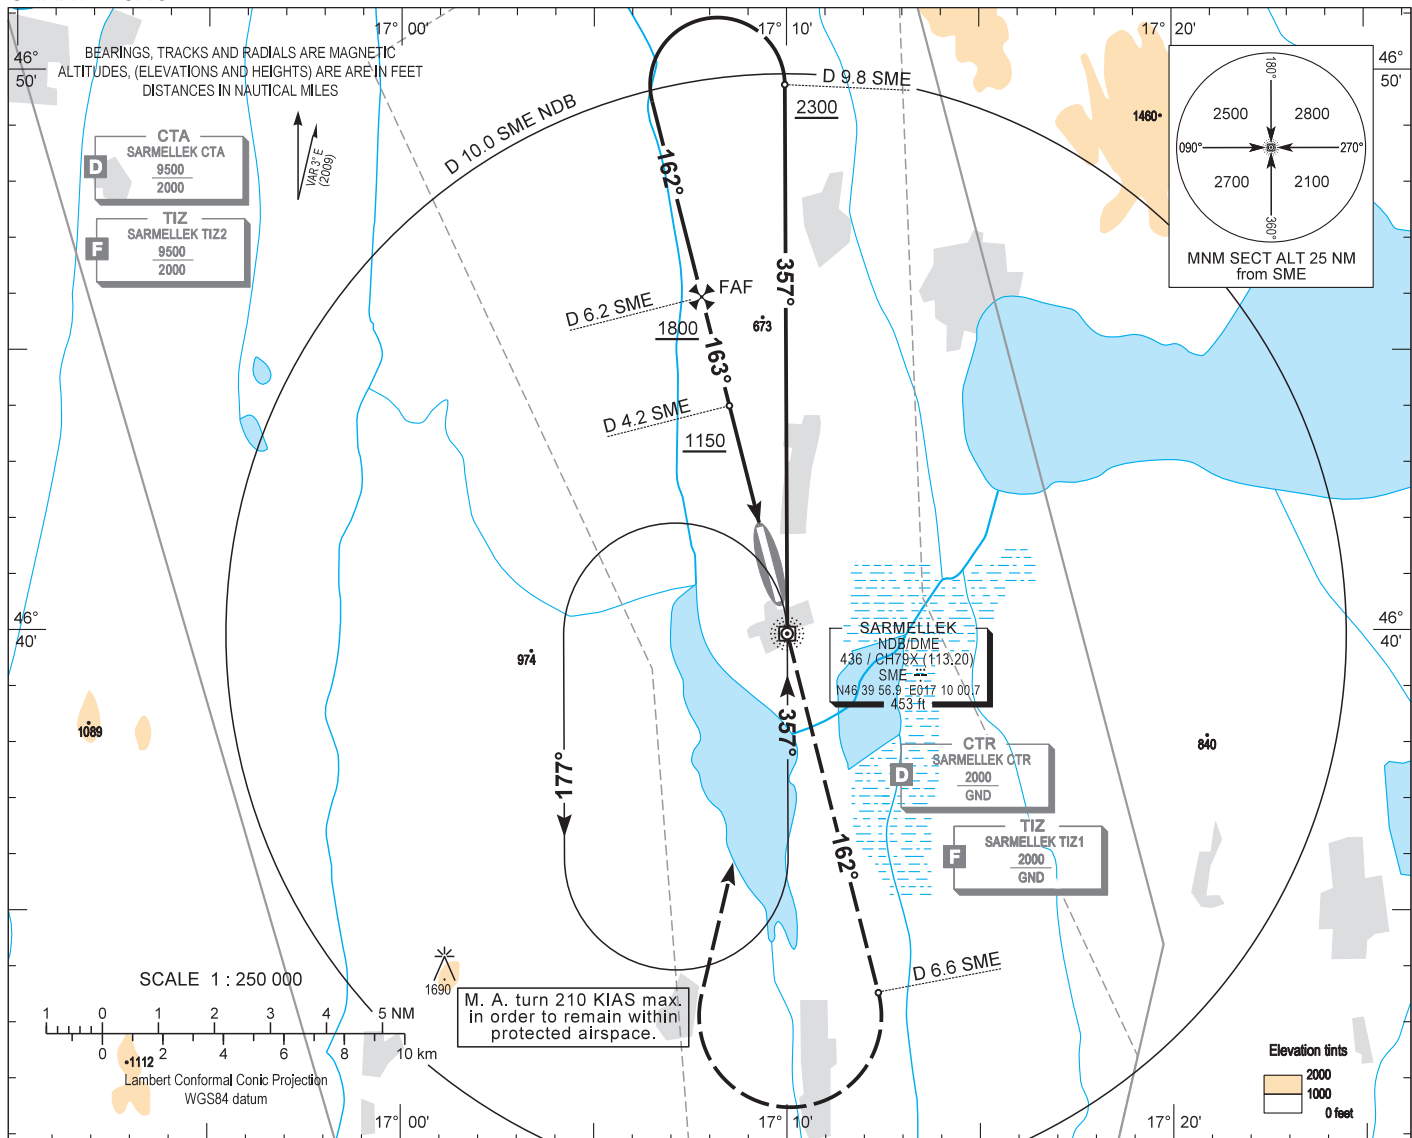

(THR RWY 16)	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	NM from THR 16				
OCA (OCH)	A				B				C				D				GROUND SPEED					kt	60	90	120	150	180
STRAIGHT-IN APPROACH					770 (360)								FAF - MAPt 4.18 NM					MIN:sec	4:11	2:47	2:06	1:40	1:24				
CIRCLING APPROACH	ft AMSL	825	1030	1410	1410																						
	VIS. m	1900	2800	3700	4600																						

AD 2 LHSM INSTRUMENT APPROACH CHART NDB RWY 16

Approach from SME DME:

Initial altitude: 4000.

Fly outbound on 357° for 3 minutes or D 9.8 SME DME (whichever comes first) and descend to 2300.

Turn left (185 KIAS max.) to 162° inbound, then descend to 1800.

At D 6.2 SME DME descend to 1150.

At D 4.2 SME DME descend to 770.

Holding procedure:

Holding fix: SME DME.

Left hand holding pattern.

Inbound track: 357°

Outbound track: 177°

Rate of turn: 3°/sec. or 25° bank angle
(whichever requires lesser bank)

Outbound timing: 1 min

Minimum holding altitude: 4000

3000 for Missed Approach

Final approach descent: 3.00°



AIP HUNGARY

INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 408
HEIGHTS RELATED TO
THR RWY 34 - ELEV 399

SÁRMELLÉK TOWER 134.575
BALATON INFO 134.575
BUDAPEST INFO (WEST) 125.500

HÉVÍZ/BALATON
NDB, RWY 34
(ACFT CAT A, B, C, D)

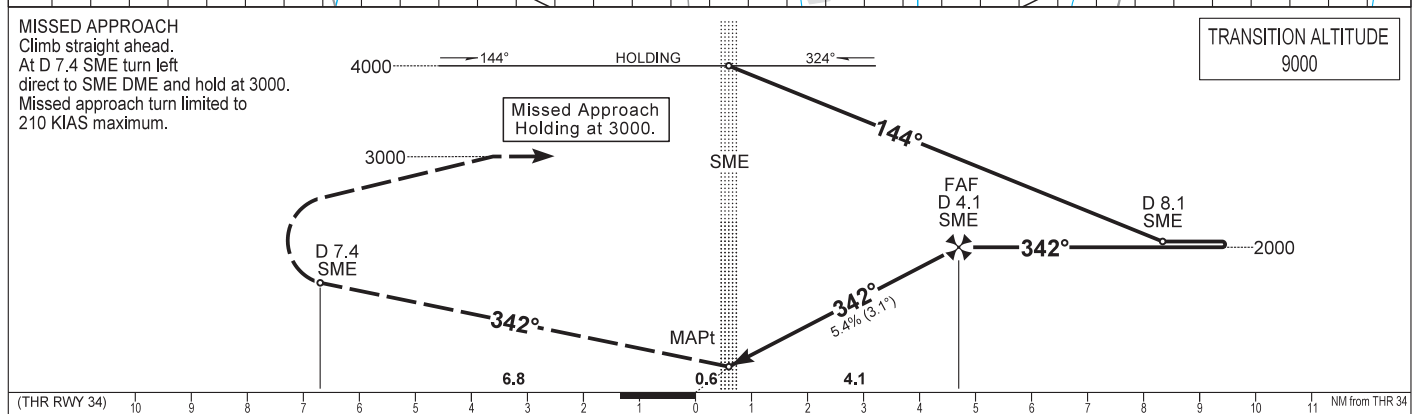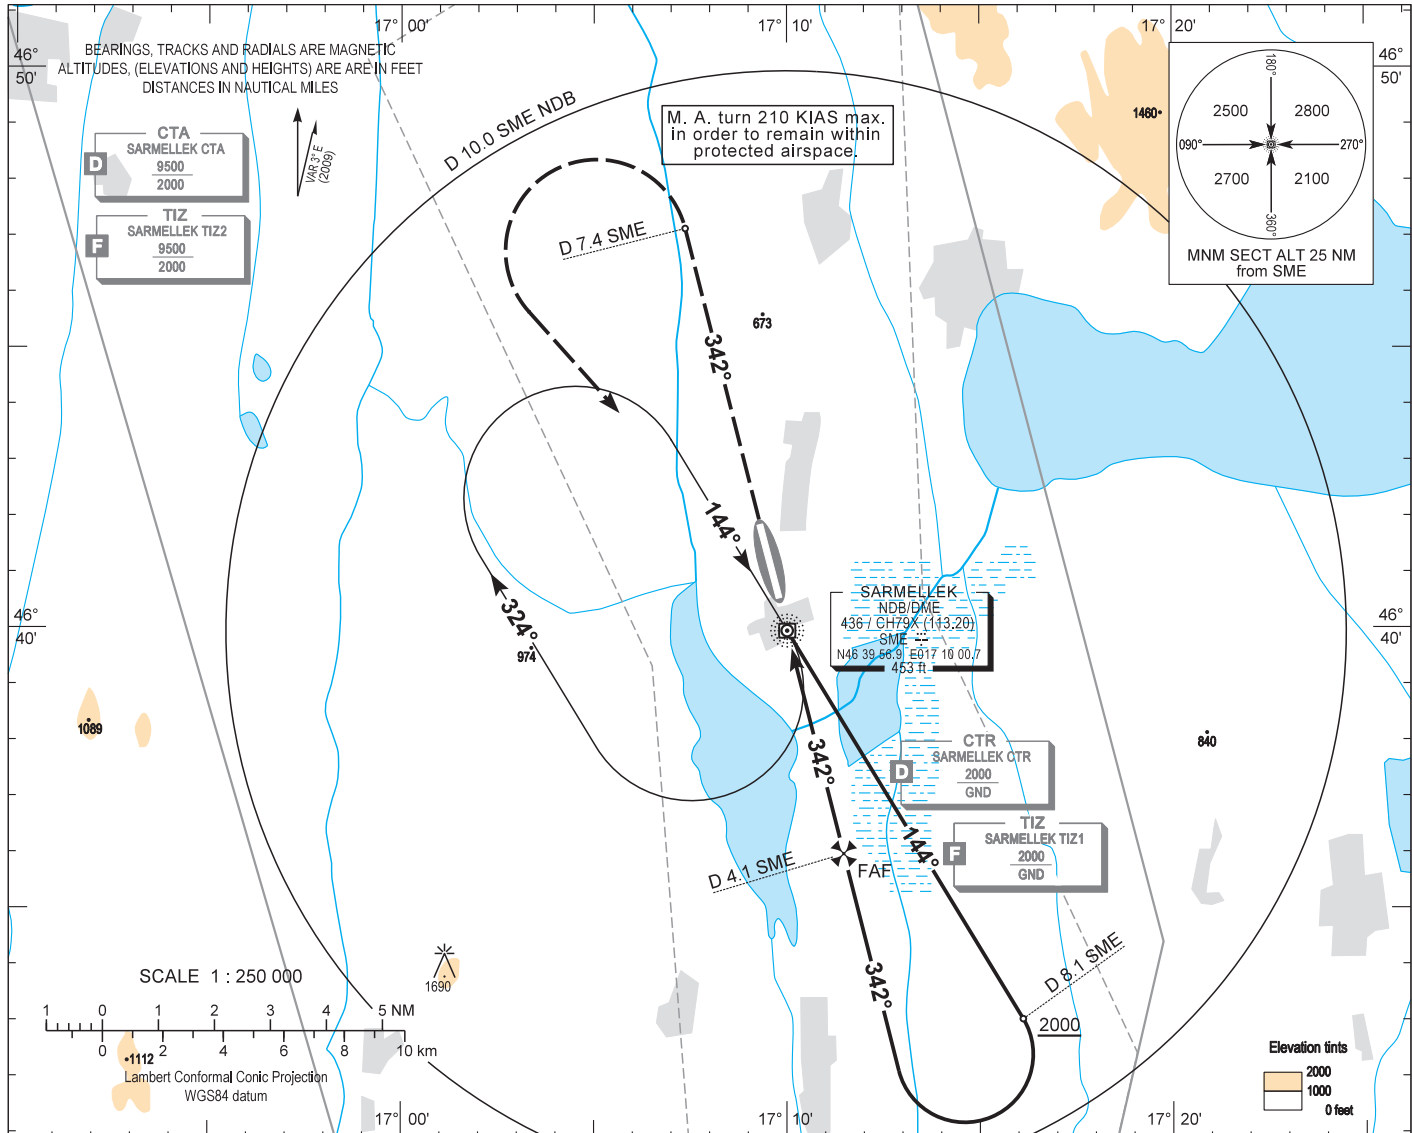

OCA (OCH)	A	B	C	D	GROUND SPEED	kt	60	90	120	150	180
STRAIGHT-IN APPROACH	690 (290)				FAF - MAPt 4.09 NM	MIN:sec	4:15	2:49	2:07	1:42	1:25
CIRCLING APPROACH	ft AMSL	825	1030	1410							
	VIS. m	1900	2800	3700							

AD 2 LHSM INSTRUMENT APPROACH CHART NDB 34

Approach from SME DME:

Initial altitude: 4000.

Fly outbound on 144° for 2.5 minutes or D 8.1 SME DME (whichever comes first) and descend to 2000.

Turn right (185 KIAS max.) to 342° inbound SME DME.

At D 4.1 SME DME descend to 690.

Holding procedure:

Holding fix: SME DME.

Left hand holding pattern.

Inbound track: 144°

Outbound track: 324°

Rate of turn: 3°/sec. or 25° bank angle
(whichever requires lesser bank)

Outbound timing: 1 min

Minimum holding altitude: 4000

3000 for Missed Approach

Final approach descent: 3.10°

Note: The following sections in this chapter are intentionally left blank: AD-2.16, AD-2.20, AD-2.21, AD-2.22, AD-2.23

LHUD AD 2.1 AERODROME LOCATION INDICATOR - NAME

LHUD SZEGED

LHUD AD 2.2 AERODROME GEOGRAPHICAL DATA AND ADMINISTRATION

1	ARP coordinates and site at AD	461503N 0200521E, at RWY 16 THR
2	Direction and distance from (city)	5 km West from centre of Szeged city
3	Elevation/Reference temperature	82 M / 27.7° C
4	Geoid undulation	44 M
5	MAG VAR/ annual change	4° E (2009) / 0.1° increasing
6	AD Administration, address, telephone, telefax, AFS	Post:Szegedi Kozlekedesi Kft. H-6720 Szeged, Zrinyi u. 4-8. H-6701 Szeged 1, POB: 78 Phone:+36 62-592-250 Aerodrome office Phone:+36 62-541-519 AFIS Phone:+36 62-541-825 Phone:(+36) 30 967 70 64 Phone: (+36) 62 553 614 Fax:+36 62 549 505 AFS:LHUDZTZX Email:info@airportszeged.hu RECEPTION Phone:+36 62 541 518
7	Types of traffic permitted (IFR/VFR)	VFR
8	Remarks	Nil

LHUD AD 2.3 OPERATIONAL HOURS

1	AD Administration	JAN 01-31	0700-1500	JUL 01-31	0700-1900
		FEB 01-28	0700-1530	AUG 01-31	0700-1830
		MAR 01-31	0700-1630	SEP 01-30	0700-1730
		APR 01-31	0700-1800	OCT 01-30	0700-1530
		MAY 01-31	0700-1900	NOV 01-30	0700-1500
		JUN 01-30	0700-1900	DEC 01-31	0700-1500
2	Customs and immigration	PPR 72 hours			
3	Health and sanitation	Nil			
4	AIS Briefing Office	As AD Administration			

5	ATS Reporting Office (ARO)	As AD Administration
6	MET Briefing Office	Nil
7	ATS	As AD Administration
8	Fuelling	As AD Administration
9	Handling	As AD Administration
10	Security	H24
11	De-icing	Nil
12	Remarks	Beyond operational hours services are available on preliminary request.

LHUD AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil
2	Fuel/oil types	AVGAS 100LL petrol, JET A1 kerosene
3	Fuelling facilities/capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	limited by prior arrangement only
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

LHUD AD 2.5 PASSENGER FACILITIES

1	Hotels	in the city
2	Restaurants	buffet at the AD, restaurants in the city
3	Transportation	taxi, bus and tram (bus- and tram-stop on road No. 55.)
4	Medical facilities	First aid at AD, hospital in the city
5	Bank and Post Office	in the city
6	Tourist Office	in the city, leaflets at the AD (AFIS)
7	Remarks	Nil

LHUD AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	A5
2	Rescue equipment	1 fire fighting vehicle
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

LHUD AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	Types of clearing equipment	Nil
2	Clearance priorities	Nil
3	Remarks	Nil

LHUD AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: GRASS Strength: N/A
2	Taxiway width, surface and strength	Width: 15 M (TWY A) Surface: ASPH Strength: 14/F/C/W/T
3	Altimeter checkpoint location and elevation	Location: Nil Elevation:
4	VOR checkpoints	Nil
5	INS checkpoints	Nil
6	Remarks	Nil

LHUD AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY: Designator, threshold, centre line, aiming point TWY: Centreline, holding positions, instruction sign
3	Stop bars	Nil
4	Remarks	Nil

LHUD AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		
RWY NR/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	3
a	b	c	a	b	
16/APCH	Antenna tower 135 M LGTD	461622.33N 0200432.38E	temple 134 M	461628.87N 0200344.05E	Nil

LHUD AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	National Meteorological Service, Aeronautical Meteorological Centre
2	Hours of service	H24
3	Office responsible for TAF preparation Periods of validity	Nil
4	Type of landing forecast Interval of issuance	Nil
5	Briefing/consultation provided	Consultation, flight documentation and other info via phone, fax or telex. See GEN 3.5
6	Flight documentation Language(s) used	Charts, abbreviated plain language text Hungarian, English
7	Charts and other information available for briefing or consultation	Aerodrome reports and forecasts for EUR, area forecasts, met. observations and warnings in Budapest FIR
8	Supplementary equipment available for providing information	Meteorological satellite display updated in every half an hour
9	ATS Units provided with information	Budapest FIC on request
10	Additional information	Nil