BUDAPEST APP	122.975	BUDAPEST TOWER	118.100	BUDAPEST APRON	122.440
	123.860	BUDAPEST GROUND	121.910	ATIS	132.380
	119.510	BUDAPEST DELIVERY	134.540	ATIS (BUD VOR)	117.300
BUDAPEST INFORMATION (NORTH)			119.350		

BUDAPEST/LISZT FERENC

APRON AG, AA, AL

AIRCRAFT PARKING/DOCKING CHART - ICAO

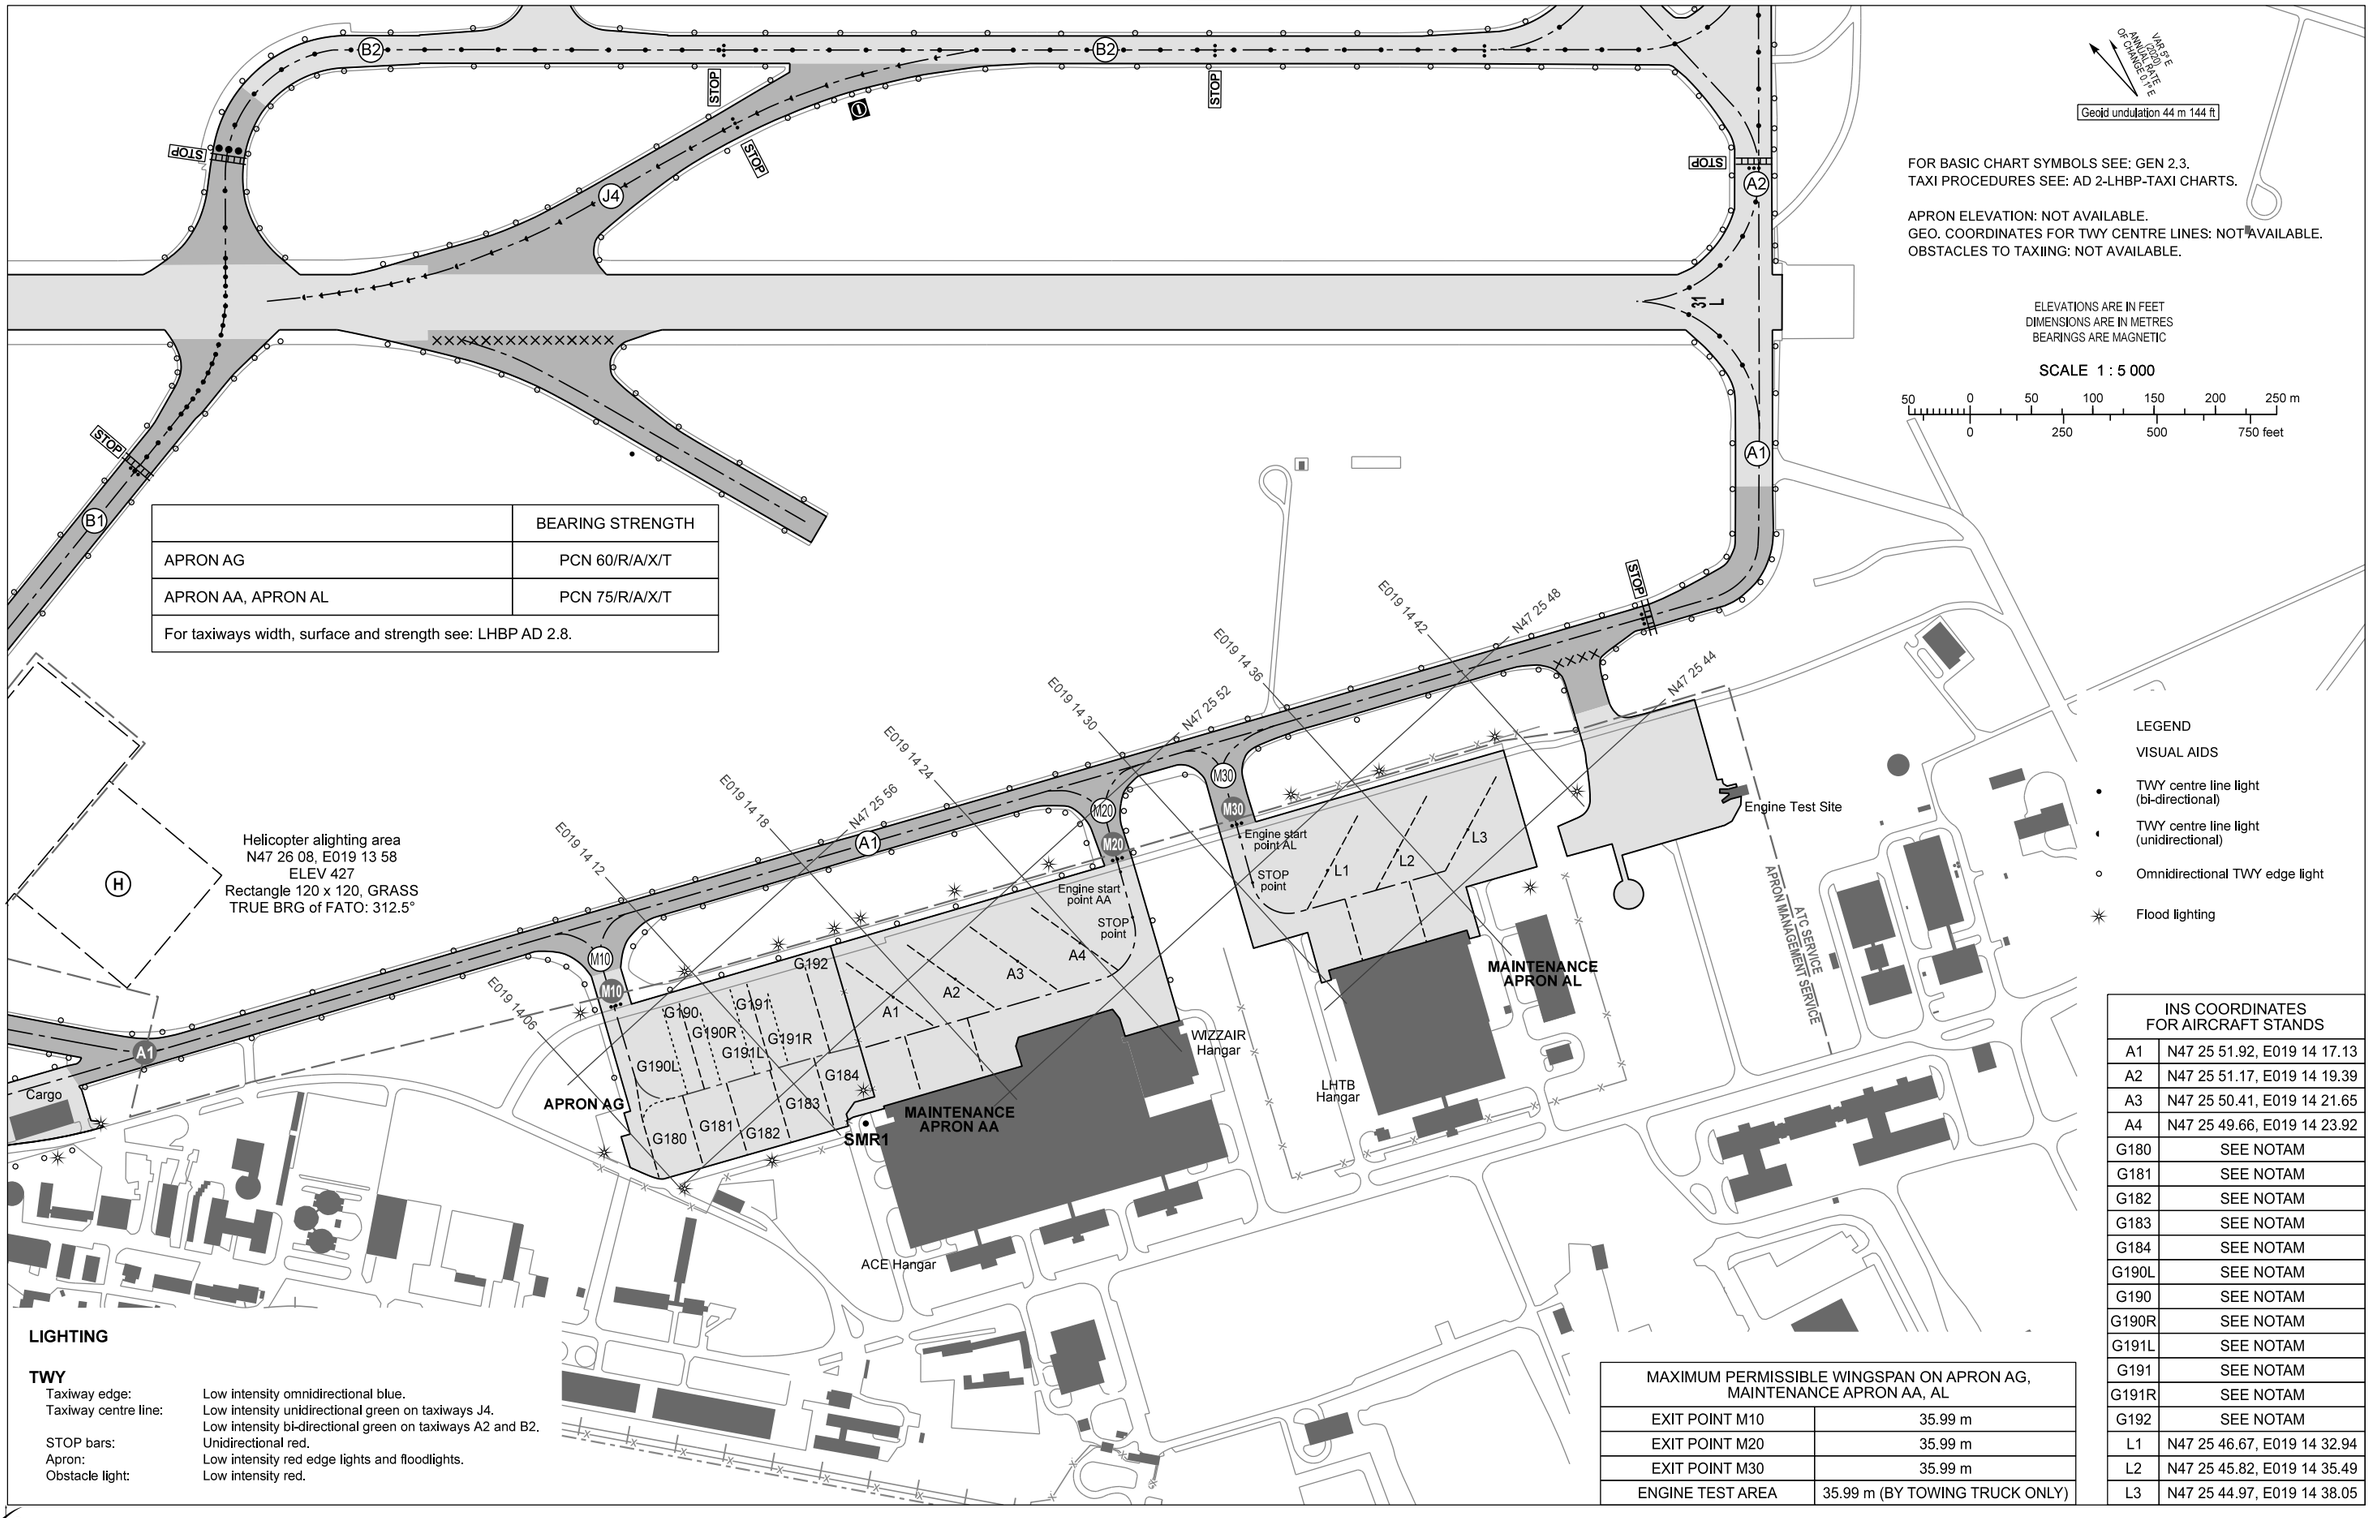

	BEARING STRENGTH
APRON AG	PCN 60/R/A/X/T
APRON AA, APRON AL	PCN 75/R/A/X/T
For taxiways width, surface and strength see: LHBP AD 2.8.	

INS COORDINATES FOR AIRCRAFT STANDS	
A1	N47 25 51.92, E019 14 17.13
A2	N47 25 51.17, E019 14 19.39
A3	N47 25 50.41, E019 14 21.65
A4	N47 25 49.66, E019 14 23.92
G180	SEE NOTAM
G181	SEE NOTAM
G182	SEE NOTAM
G183	SEE NOTAM
G184	SEE NOTAM
G190L	SEE NOTAM
G190	SEE NOTAM
G190R	SEE NOTAM
G191L	SEE NOTAM
G191	SEE NOTAM
G191R	SEE NOTAM
G192	SEE NOTAM
L1	N47 25 46.67, E019 14 32.94
L2	N47 25 45.82, E019 14 35.49
L3	N47 25 44.97, E019 14 38.05

MAXIMUM PERMISSIBLE WINGSPAN ON APRON AG, MAINTENANCE APRON AA, AL	
EXIT POINT M10	35.99 m
EXIT POINT M20	35.99 m
EXIT POINT M30	35.99 m
ENGINE TEST AREA	35.99 m (BY TOWING TRUCK ONLY)

LIGHTING

TWY

Taxiway edge:	Low intensity omnidirectional blue.
Taxiway centre line:	Low intensity unidirectional green on taxiways J4. Low intensity bi-directional green on taxiways A2 and B2.
STOP bars:	Unidirectional red.
Apron:	Low intensity red edge lights and floodlights.
Obstacle light:	Low intensity red.

CHANGE: construction works

THIS PAGE IS INTENTIONALLY LEFT BLANK