

AERODROME CHART - ICAO




ARP  
N47 26 22  
E019 15 43  
AERODROME ELEV 496

BUDAPEST APP 122.975  
123.860  
119.510  
BUDAPEST TOWER 118.100  
BUDAPEST GROUND 121.810  
BUDAPEST DELIVERY 134.540  
BUDAPEST INFORMATION (NORTH) 119.350  
BUDAPEST APRON 122.440  
ATIS 132.380  
ATIS (BUD VOR) 117.300

RWY	DIRECTION	THR	BEARING STRENGTH	TORA	TODA	ASDA	LDA
13R	127°	N47 26 55, E019 13 15	PCN 75/R/A/X/T	3009	3009	3009	3009
31L	307°	N47 25 50, E019 15 01	PCN 75/R/A/X/T	3009	3009	3009	3009
13L	127°	N47 26 44, E019 15 27	PCN 90/R/A/X/T	3707	3707	3707	3707
31R	307°	N47 25 23, E019 17 38	PCN 90/R/A/X/T	3707	3707	3707	3707





APRON 1, APRON AG	PCN 60/R/A/X/T
APRON 2	PCN 90/R/A/X/T
APRON AA, APRON AL	PCN 75/R/A/X/T
CARGO APRON	PCN 80/R/A/W/T

For taxiways width, surface and strength see: LHBP AD 2.8.

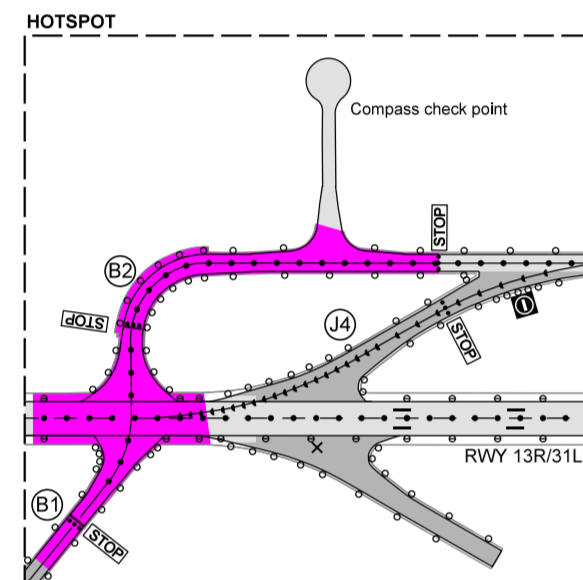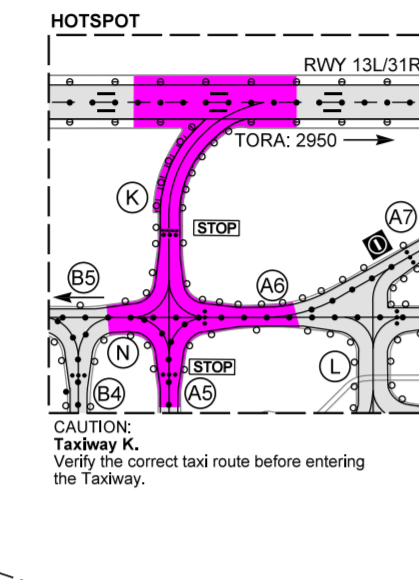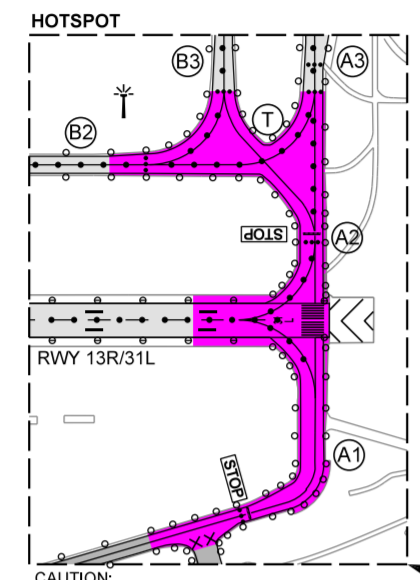

CAUTION: Taxiways A1 and A2. Do NOT cross the holding position markings without ATC clearance issued on TVFR frequency (118.100 MHz).

CAUTION: Taxiways B1 and B2. Do NOT cross the holding position markings without ATC clearance issued on TVFR frequency (118.100 MHz).

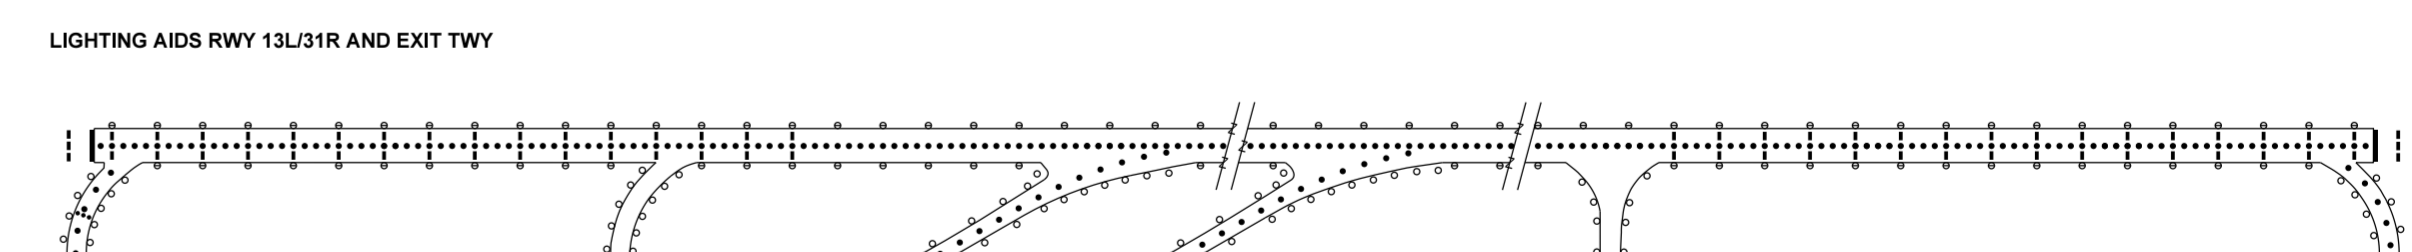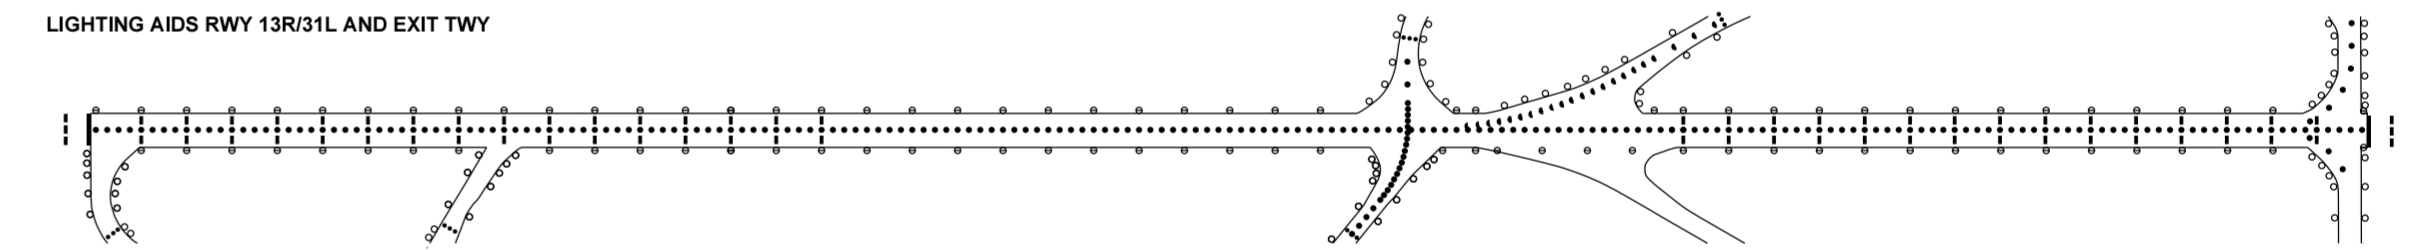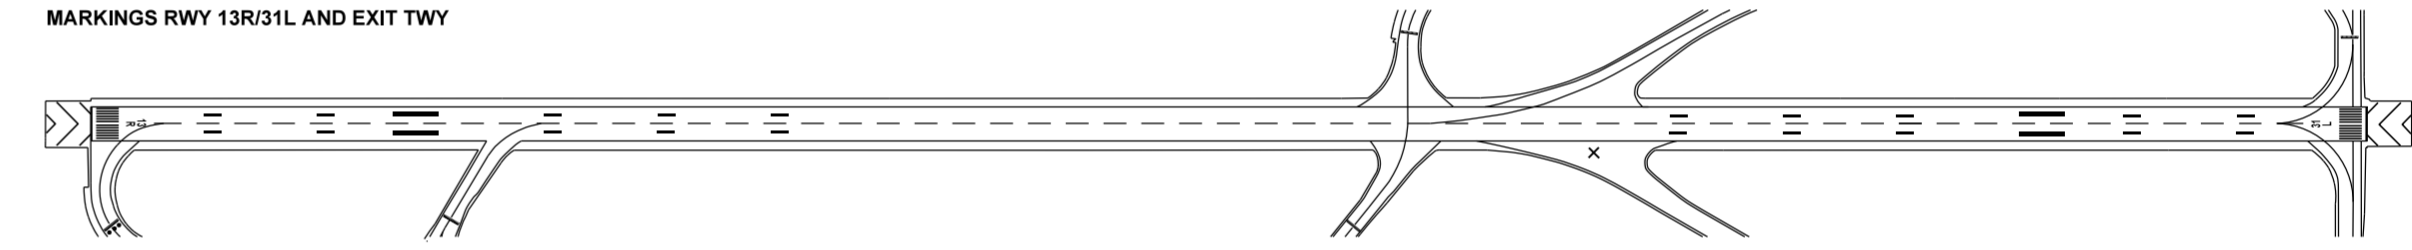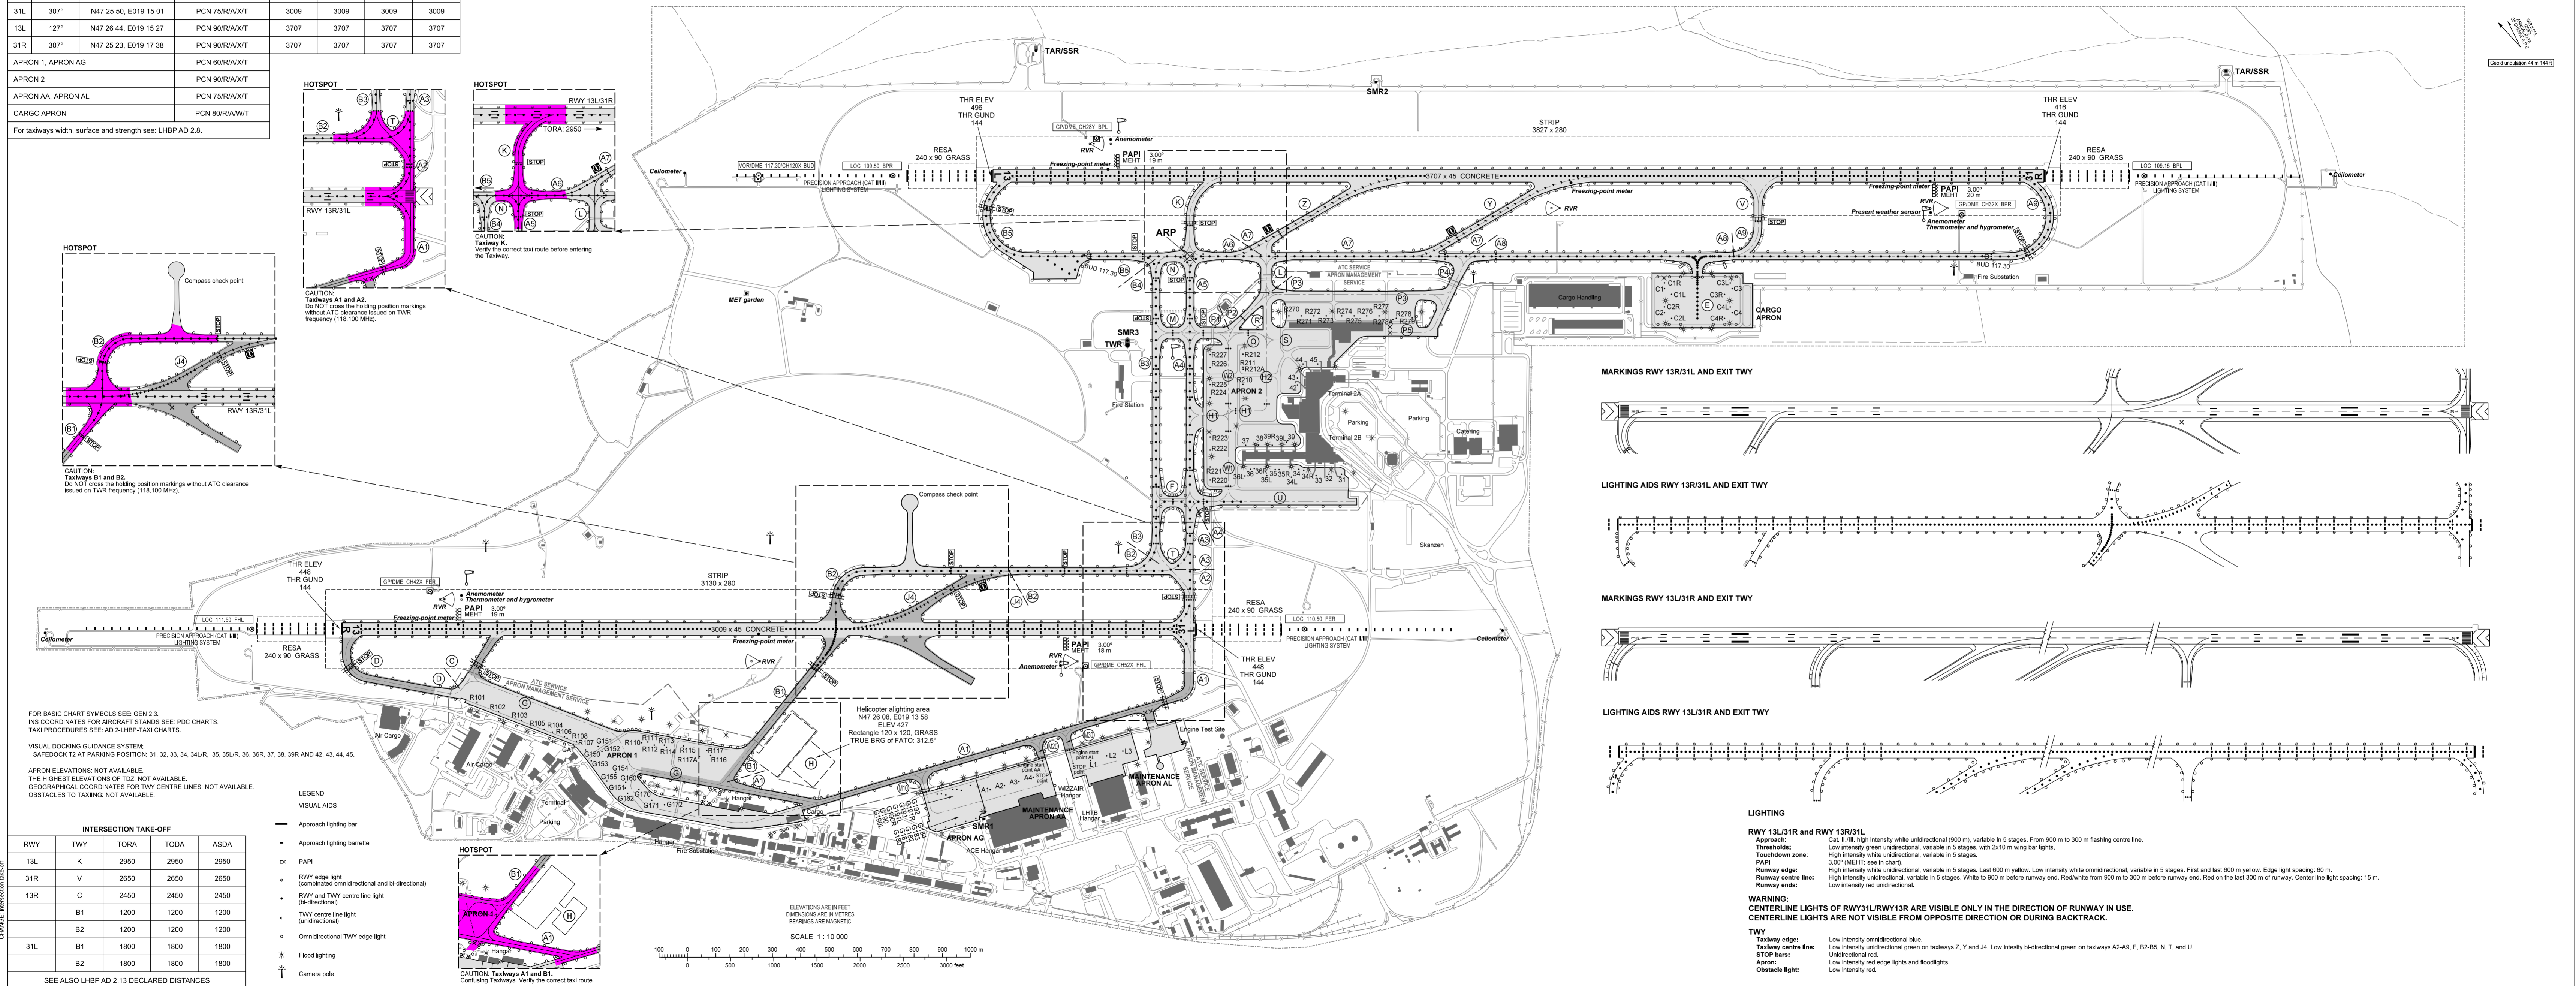

**LIGHTING**  
RWY 13L/31R and RWY 13R/31L  
Approach: Cat. II/III, high intensity white unidirectional (900 m), variable in 5 stages. From 900 m to 300 m flashing centre line.  
Thresholds: Low intensity green unidirectional, variable in 5 stages, with 2x10 m wing bar lights.  
Touchdown zone: High intensity white unidirectional, variable in 5 stages.  
PAPI: 3.00° (MEHT: see in chart).  
Runway edge: High intensity white unidirectional, variable in 5 stages. Last 600 m yellow. Low intensity white omnidirectional, variable in 5 stages. First and last 600 m yellow. Edge light spacing: 60 m.  
Runway centre line: High intensity unidirectional, variable in 5 stages. White to 900 m before runway end. Red/white from 900 m to 300 m before runway end. Red on the last 300 m of runway. Center line light spacing: 15 m.  
Runway ends: Low intensity red unidirectional.

**WARNING:**  
CENTERLINE LIGHTS OF RWY31L/RWY13R ARE VISIBLE ONLY IN THE DIRECTION OF RUNWAY IN USE.  
CENTERLINE LIGHTS ARE NOT VISIBLE FROM OPPOSITE DIRECTION OR DURING BACKTRACK.

**TWY**  
Taxiway edge: Low intensity omnidirectional blue.  
Taxiway centre line: Low intensity unidirectional green on taxiways Z, Y and J4. Low intensity bi-directional green on taxiways A2-A9, F, B2-B5, N, T, and U.  
STOP bars: Unidirectional red.  
Apron: Low intensity red edge lights and floodlights.  
Obstacle light: Low intensity red.

FOR BASIC CHART SYMBOLS SEE: GEN 2.3  
INS COORDINATES FOR AIRCRAFT STANDS SEE: PDC CHARTS.  
TAXI PROCEDURES SEE: AD 2-LHBP-TAXI CHARTS.  
VISUAL DOCKING GUIDANCE SYSTEM:  
SAFEDOCK T2 AT PARKING POSITION: 31, 32, 33, 34, 34LR, 35, 35LR, 36, 36R, 37, 38, 39R AND 42, 43, 44, 45.  
APRON ELEVATIONS: NOT AVAILABLE.  
THE HIGHEST ELEVATIONS OF TDZ: NOT AVAILABLE.  
GEOGRAPHICAL COORDINATES FOR TWY CENTRE LINES: NOT AVAILABLE.  
OBSTACLES TO TAXIING: NOT AVAILABLE.

**INTERSECTION TAKE-OFF**

RWY	TWY	TORA	TODA	ASDA
13L	K	2950	2950	2950
31R	V	2650	2650	2650
13R	C	2450	2450	2450
	B1	1200	1200	1200
	B2	1200	1200	1200
31L	B1	1800	1800	1800
	B2	1800	1800	1800

THIS PAGE IS INTENTIONALLY LEFT BLANK